

BioPure PolySteel gaskets

polytetrafluoroethylene / stainless steel

FEATURES AND BENEFITS

- PTFE/stainless steel composite gasket
- Best in class continuous steam resistance
- Minimal cold flow and creep compared to solid PTFE
- Manufactured in accordance with ASME-BPE standards
- USP Class VI compliant and ADCF
- Compliant with FDA regulations CFR 21 177.2600
- Full material lot traceability





TECHNICAL DATA

Specifications

Temperature resistance	-212C to 327C (-350F to 620F continuous)
------------------------	--

ORDER INFORMATION—UNFLANGED TYPE I GASKET

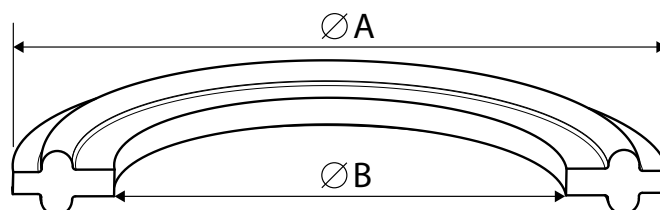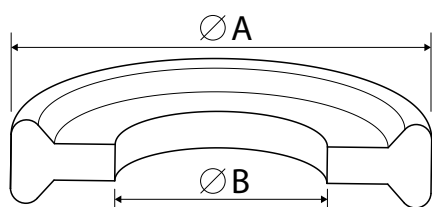

Part number	Size inch	I.D (ØB) inch (mm)	O.D (ØA) inch (mm)	Quantity
42MPG-PS-050-25	1/2	0.38 (9.7)	0.85 (21.6)	25
42MPG-PS-075-25	3/4	0.62 (15.7)	0.85 (21.6)	25
40MPG-PS-100-25	1	0.88 (22.4)	1.98 (50.3)	25
40MPG-PS-150-25	1 1/2	1.38 (35.1)	1.98 (50.3)	25
40MPG-PS-200-25	2	1.88 (47.8)	2.52 (64.0)	25
40MPG-PS-250-25	2 1/2	2.38 (60.5)	3.05 (77.5)	25
40MPG-PS-300-25	3	2.88 (73.2)	3.58 (90.9)	25
40MPG-PS-400-25	4	3.84 (97.5)	4.68 (118.9)	25
40MOG-PS-600-25	6	5.84 (148.3)	6.57 (166.9)	25

Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the users responsibility to ensure product suitability for use within their application. Watson-Marlow and pure are registered trademarks of Watson-Marlow Limited. Bio Y, BioClamp, BioBarb, FlatBioEndCap, BioEndCap, BioValve and BioTube applicator are Trademarks of BioPure Technology Limited. Tri-Clamp is a registered trademark of Alfa Laval Corporate AB. Q-Clamp is used under licence.



wmftg.com
info@wmftg.com
+44 (0) 2392 499000