


521F/REMC fixed speed and 521P/REMC pneumatic pumps fitted with LoadSure® element pumphead

500^{series}

Watson-Marlow Pumps

FEATURES AND BENEFITS

- Flow rates up to 2000 ml/min (31.7 USGPH) peak flow at 2 bar (30psi) peak pressure with 520 LoadSure® elements
- 520REMC pumphead features PPS (polyphenylene sulphide) track and rotor with stainless steel occlusion rollers to resist chemical attack and abrasive wear
- Heavy duty pumphead construction with impact proof safeguard
- Sprung rotor gently compresses tubing using large low friction rollers with sealed bearings, guaranteeing long tube life and accurate metering
- Fast and simple pumphead set-up using a clutched rotor for effortless element loading





Watson-Marlow...Innovation in Full Flow

TECHNICAL DATA

Pump drives	521F	521P
Three phase AC motor gearbox in three speed options	•	
Industry standard motors	•	•
Four vane pneumatic motor with speed limiting		•
Speed control ratio (with suitable equipment)	10:1	Variable
Reversible with suitable equipment	•	•
Optional baseplate mounting	•	•



PERFORMANCE

LoadSure® element tubing flow rates (ml/min)			
Tube material	Speed	3.2mm	6.4mm
Marprene TM, Bioprene TM	60rpm	100	400
	213rpm	360	1400
	291rpm	490	2000
STA-PURE PCS, STA-PURE PFL,	60rpm	110	420
	213rpm	370	1500
	291rpm	510	2000
Marprene TM, Bioprene TM	257rpm	430	1700
STA-PURE PCS, STA-PURE PFL,	257rpm	450	1800

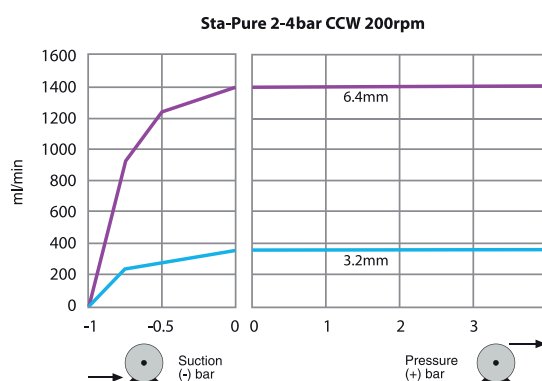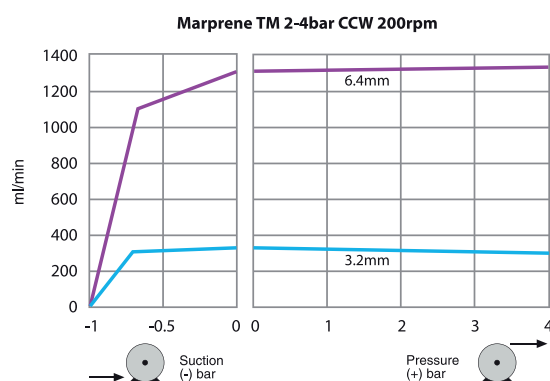

To achieve 4 bar pressure the pump must rotate counter-clockwise

DIMENSIONS

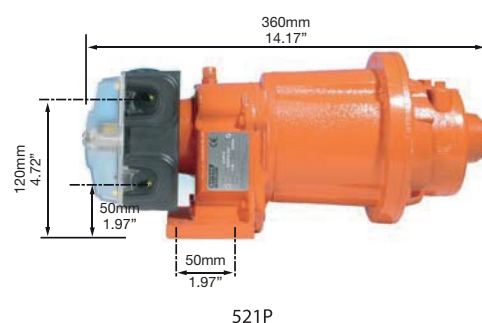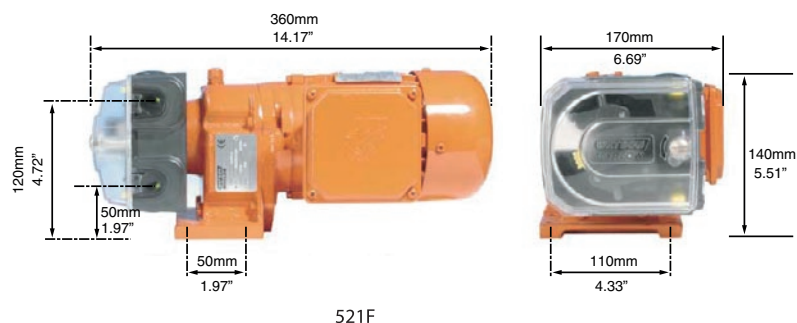

TECHNICAL SPECIFICATION

	521F	521P
Ingress rating	IP55	IP55
Temperature	5C to 40C (40F to 104F)	5C to 40C (40F to 104F)
Pump weight	11kg (24lb 4oz)	11kg (24lb 4oz)
Control ratio	10:1	5:1
Noise	<70dB(A) at 1m	<70dB(A) at 1m
Standard	CE, EN60529	CE
Supply	230/400V 3ph 50Hz	Compressed air, clean/dry/lubricated
Power	0.18kW	Up to equivalent 0.56kW 14l/sec (30 cfm) @ 7bar (100psi)

MATERIALS OF CONSTRUCTION

Component	Material
Motor	Cast aluminium alloy
Gearbox	Cast iron
Pumphead track	PPS (polyphenylene sulphide)
Guard - inner/outer	Polycarbonate
Guard seal	Neoprene
Rotor hub	Stainless steel 316
Roller arms, rotor cover	PPS (polyphenylene sulphide)
Rollers - main/guide	Stainless steel
Main roller bearings	Stainless steel
Drain port	PP (polypropylene)
Drain plug	Hytrel

ORDER INFORMATION

Pump and pumphead product codes			
Description	Partcode	Description	Partcode
521F/REMC 60rpm pump	050.8122.EM0		
521F/REMC 213rpm pump	050.8152.EM0		
521F/REMC 291rpm pump	050.8172.EM0		
520REMC pumphead	053.1031.EM0	Leak detector	059.8111.000
		521P/REMC 257rpm pump	050.8252.EM0

Element product codes				
	Industrial LoadSure® elements Quick-release PVDF connectors		Sanitary LoadSure® elements 3/4 in Sanitary PVDF connectors	
	3.2mm	6.4mm	3.2mm	6.4mm
Marprene TM	902.P032.PFQ	902.P064.PFQ		
STA-PURE PFL	965.M032.PFQ	965.M064.PFQ	965.M032.PFT	965.M064.PFT
Bioprene TM			933.P032.PFT	933.P064.PFT
STA-PURE PCS			960.M032.PFT	960.M064.PFT

All flow rates shown were obtained pumping water at 20C (68F) with zero suction and delivery heads. Watson-Marlow, Bioprene and Marprene are trademarks of Watson-Marlow Limited. Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. LoadSure is a trademark of Watson-Marlow Limited. © STA-PURE PFL and © STA-PURE PCS are registered trademarks of W.L Gore & Associates Inc. Please state the product code when ordering pumps and tubing.

**WATSON
MARLOW
Pumps**

wmftg.com
info@wmftg.com
+44 (0) 1326 370370