

# MasoSine Process Pumps SPS sinusoidal pumps

## Contents



1	Declaration of conformity	2	13 Possible pump orientations	26
2	Declaration of incorporation	3	13.1 Changing the pump orientation	26
3	Warranty and liability	4	13.2 Changing rotation direction	27
4	When you unpack your pump	5	14 Connecting this product to a power supply	28
5	Information for returning pumps	6	15 Start-up and operation	28
6	Sinusoidal pumps—an overview	6	16 Flushing the seal system	29
7	Safety notes	7	16.1 Static flushing device	29
7.1	Obligation of the operating organisation	7	17 Cleaning and sterilisation	30
7.2	Organisational measures	7	18 Heating and cooling option	32
7.3	Obligation of the operators	8	19 Oil change	33
7.4	Personnel training	8	20 Troubleshooting	34
7.5	Safety measures	8	21 Adjusting the shaft	36
7.6	Dangers when handling the machine	8	21.1 Adjusting dimension X in models with cast power frame	36
7.7	Safety measures in normal operation	9	21.2 Adjusting dimension X in models with stainless steel power frame	38
7.8	Protective devices	9	22 Dismantling and assembly	40
7.9	Dangers due to hazardous pumped material	9	22.1 Dismantling all models	40
7.10	Dangers due to electrical energy	9	22.2 Dismantling and assembling the SPS 100	40
7.11	Dangers due to hydraulic energy	10	22.2.1 Dismantling the SPS 100	40
7.12	Special danger points	10	22.2.2 Assembling the SPS 100	48
7.13	Constructional changes to the machine	10	22.3 Dismantling and assembling the SPS 200	54
7.14	Noise	10	22.3.1 Dismantling the SPS 200	54
7.15	Temperature	10	22.3.2 Assembling the SPS 200	67
7.16	Limit values for the pump	11	22.4 Dismantling and assembling the SPS 250, SPS 300, SPS 400 and SPS 500	80
7.17	Maintenance and repair	11	22.4.1 Dismantling the SPS 250	80
7.18	Cleaning the pump	13	22.4.2 Assembling the SPS 250, SPS 300, SPS 400 and SPS 500	89
7.19	Faults	13	23 The static flushing device	97
7.20	Use as intended	14	24 Tightening torques	103
8	Safety notes (ATEX)	14	25 Parts lists	105
8.1	Safety signs	14	25.1 Pumps	106
8.2	Earthing the pump	15	25.2 Seals	124
8.3	Material properties	15	25.3 Front support versions	135
8.4	Pressure conditions	15	25.4 The flushing ring for tubing	140
8.5	Maintenance and repair	15	25.5 The static flushing device	141
8.6	Cleaning the pump	16	26 Decontamination certificate	143
8.7	Medium to be pumped	16	27 Trademarks	144
8.8	Coupling	16	28 Publication history	144
8.9	Drive	16		
9	Pump specifications			
9.1	Dimensions (in millimetres)	17		
10	Transport	23		
11	Installation	23		
12	Connection to the piping	24		
12.1	Cavitation	25		

# 1 Declaration of conformity



Watson-Marlow GmbH - Postfach 100 - 74358 Ilsfeld - Germany

## EC DECLARATION OF CONFORMITY

as defined by the EC Machinery Directive 2006/42/EC,  
in accordance with Annex II A for machines to be incorporated

The manufacturer: **Watson-Marlow GmbH MasoSine**  
**Postfach 100**  
**D-74358 Ilsfeld (Germany)**  
**Tel.: +49(0)7062 9560-0**

herewith declares that the following complete machine consisting of:

Name : **MasoSine Pump** Drive : **SEW Eurodrive GmbH & Co KG**  
Type : **SPS** Clutch: **KTR Kupplungstechnik GmbH**

by virtue of its design and type, and the version placed on the market by us conforms to the relevant essential health and safety requirements of the EC Directives.  
This declaration becomes invalid if a change is made to the complete machine without being agreed with us beforehand.

Relevant EC Directives:

**2006/42/EC** : EC Machinery Directive  
**2014/35/EU** : EC Low Voltage Directive  
**2014/30/EU** : EMC Directives

Harmonised EN standards and EC Directives used:

**EN ISO 12100, 1-2** : Safety of machinery  
**97/23/EG** : Pressure Equipment Directive  
**EN 60204-1** : Electrical equipment for industrial machines

National technical standards, guidelines and specifications used:

**EN 809** : Pumps and pump units for liquids - Common safety requirements  
**DIN 31000/A1** : General principles for the safe design of technical products  
**DIN 11850** : Stainless steel tubes for food and chemical  
**DIN 11851** : Fittings for food, chemical and pharmaceutical industry - pipe fittings of stainless steel - Design for rolling and welding

Manufacturer and manufacturer's declaration of suppliers for engines, gearboxes and clutches.


The original version of the operating instructions for this complete machine is available.

The complete machine may not be put into service until the machine / plant into which the complete machine is to be incorporated has been declared in conformity with the provisions of the Machinery Directive (2006/42/EC).

This declaration expires at non-use under normal use, as well as constructive changes that were not confirmed in writing by us as a manufacturer.

The person responsible for the documentation was Bernd Wetzel, Tel.: +49(0)7062 9560-17

Ilsfeld, 01.05.2016  
Place, Date

  
(GM) Ulrich Fromm

**Watson-Marlow**

**Bredel**

**Alitea**

**Flexicon**

**MasoSine**

Watson Marlow GmbH  
MasoSine Division  
Steinbeisstr. 3  
D-74360 Ilsfeld

Geschäftsführer:  
Jay Whalen

Telefon: +49 7062 9560-0  
Telefax: +49 7062 64593  
eMail: info@masosine.de  
internet: http://www.masosine.de

Registergericht:  
Mönchengladbach HRB 7703

Sitz der Gesellschaft:  
Watson-Marlow GmbH  
Mühlenweg 9  
D-41569 Rommerskirchen

USt-IdNr.: DE 811768919

Dresdner Bank AG Dormagen  
BLZ 300 800 00 Kto 01 334 451 00  
IBAN: DE24300800000133445100  
S.W.I.F.T.: DRESDEFF300

A Spirax-Sarco Engineering Company



## 2 Declaration of incorporation



Watson-Marlow GmbH · Postfach 100 · 74358 Ilsfeld · Germany

### EC DECLARATION OF INCORPORATION

as defined by the EC Machinery Directive 2006/42/EC,  
in accordance with Annex II B for machines to be incorporated

The manufacturer: **Watson-Marlow GmbH MasoSine**  
**Postfach 100**  
**D-74358 Ilsfeld (Germany)**  
**Tel.: +49(0)7062 9560-0**

herewith declares that the following partly completed machine:

Name : **MasoSine Pump**  
Type : **SPS**

complies with the following essential requirements of the Machinery Directive (2006/42/EC).

Harmonised EN standards used:

**EN ISO 12100, 1-2** : Safety of machinery  
**97/23/EG** : Pressure Equipment Directive  
**EN 60204-1** : Electrical equipment for industrial machines

National technical standards, guidelines and specifications used:

**EN 809** : Pumps and pump units for liquids - Common safety requirements  
**DIN 31000/A1** : General principles for the safe design of technical products  
**DIN 11850** : Stainless steel tubes for food and chemical  
**DIN 11851** : Fittings for food, chemical and pharmaceutical industry - pipe fittings of stainless steel - Design for rolling and welding

The original version of the operating instructions for this incomplete machine is available.

The incomplete machine may not be put into service until the machine / plant into which the incomplete machine is to be incorporated has been declared in conformity with the provisions of the Machinery Directive (2006/42/EC).

The manufacturer undertakes to provide national authorities with relevant documentation on the incomplete machine by electronic means on request.

The relevant technical documentation belonging to the machine according to Annex VII Part B has been prepared.  
The person responsible for the documentation was Bernd Wetzel, Tel.: +49(0)7062 9560-17

Ilsfeld, 01.01.2016  
Place, Date

  
(GM) Ulrich Fromm

**Watson-Marlow**

**Bredel**

**Alitea**

**Flexicon**

**MasoSine**

Hausadresse Telefon: +49 7062 9560-0  
Steinbeisstraße 3 Telefax: +49 7062 64593  
74360 Ilsfeld eMail: info@masosine.de  
Germany Internet: http://www.masosine.de

Registergericht Mönchengladbach HRB 7703 · Geschäftsführer: Christopher Gadsden  
A Spirax-Sarco Engineering Company

Dresdner Bank AG Dormagen (BLZ 300 800 00) 0133445100

USt-IdNr. DE 811768919



The information in this user guide is believed to be correct at the time of publication. However, MasoSine Process Pumps accepts no liability for errors or omissions. MasoSine Process Pumps has a policy of continuous product improvement, and reserves the right to alter specifications without notice. This manual is intended for use only with the pump it was issued with. Earlier or later models may differ. The most up-to-date manuals appear on the MasoSine website:  
<http://www.masosine.de>

### 3 Warranty and liability

MasoSine warrants, subject to the conditions and exceptions below, through either MasoSine, its subsidiaries, or its authorised distributors, to repair or replace free of charge the pump housing or the pump front cover if it fails within 20 years of the day of manufacture of the product. MasoSine warrants, subject to the conditions and exceptions below, through either MasoSine, its subsidiaries, or its authorised distributors, to repair or replace free of charge the pump housing or the pump front cover if it fails within 20 years of the day of manufacture of the product. Such failure must have occurred because of defect in material or workmanship and not as a result of operation of the product other than in normal operation as defined in this manual. Warranty on other parts will be in accordance with legal regulations.

MasoSine will not be liable for any loss, damage, or expense directly or indirectly related to or arising out of the use of its products, including damage or injury caused to other products, machinery, buildings, or property, and MasoSine will not be liable for consequential damages, including, without limitation, lost profits, loss of time, inconvenience, loss of product being pumped, and loss of production. This warranty does not obligate MasoSine to bear any costs of removal, installation, transportation, or other charges which may arise in connection with a warranty claim.

Specific exceptions to the above warranty are:

#### Exceptions

Warranty and liability claims for personal and material damage are excluded if they are attributable to one or several of the following causes:

- Use of the machine not as intended
- Incorrect installation, operation or maintenance of the machine
- Operating the machine with defective safety devices or safety and protective devices not correctly attached or not functioning
- Non-compliance with the operating instructions regarding transport, storage, installation, start-up, operation, maintenance and setting of the machine.
- Unauthorised constructional changes to the machine
- Incorrectly performed repairs
- Catastrophe due to the effect of foreign bodies and acts of God

MasoSine grants no implicit warranties on the suitability of the products described for a certain application. MasoSine accepts no liability for errors contained in this documentation or consequential damage occurring due to the design, performance and the use of this documentation.

MasoSine's "General sales and delivery conditions" contain full details. These are available to the purchaser at the latest when the purchase contract is finalised.

## 4 When you unpack your pump

Unpack all parts carefully, retaining the packaging until you are sure all components are present and in good order. Check against the components supplied lists, below.

### Packaging disposal


Dispose of packaging materials safely, and in accordance with regulations in your region.

### Inspection

Check that all components are present. Inspect components for damage in transit. If anything is missing or damaged, contact your distributor immediately.

### Components supplied (SPS 100, SPS 200, SPS 250, SPS 300, SPS 400 and SPS 500)

- SPS 100, SPS 200, SPS 250, SPS 300, SPS 400 or SPS 500 sinusoidal pump, bare-shaft, with stainless steel or cast iron power frame












- The technical data-sheet identifying, describing and defining the pump
- Operating instructions

### Optional items

- Coupling
- Coupling guard
- Drive
- Baseplate

### Optional special design

- Flush systems
- Guard Master
- Jacketing for heating and cooling

	stainless power frame	cast iron power frame
SPS 100		n/a
SPS 200		
SPS 250		n/a
SPS 300		
SPS 400		
SPS 500		n/a

## Storage

This product has an extended shelf life. However, plastic parts and elastomeric parts should be stored in a cool, dry environment. Care should be taken after storage to ensure that all parts function correctly.

## 5 Information for returning pumps

Equipment which has been contaminated with, or exposed to, body fluids, toxic chemicals or any other substance hazardous to health must be decontaminated before it is returned to MasoSine or its distributor.

A certificate included at the rear of these operating instructions, or signed statement, must be attached to the outside of the shipping carton. This certificate is required even if the pump is unused. See 28 *Decontamination certificate*.

If the pump has been used, the fluids that have been in contact with the pump and the cleaning procedure must be specified along with a statement that the equipment has been decontaminated.

If a returned pump requires cleaning, a charge will be made. Internal parts that have not been decontaminated will be replaced and a charge will be made.

## 6 Sinusoidal pumps—an overview

The functioning principle of MasoSine pumps is ingeniously simple.

The pump consists of modular components.

The sinusoidal rotor creates a chamber within the pump body four times per revolution, in which the pumped fluid is displaced. As a filled chamber rotates, it contracts, closes and discharges its contents. At the same time, the opposite chamber opens by the same fraction of a millimetre to draw in more fluid. The result is a pump free of pulsation.

The gate works as a seal between the pressure side and the suction side of the pump. It prevents an equalization of the pressure created by the rotor, stopping it escaping to the suction side.

## 7 Safety notes

Knowledge of these safety instructions and of the safety regulations in your area is a requirement for safe handling and trouble-free operation of this machine.

These operating instructions contain the most important instructions to operate the machine safely. These operating instructions, especially the safety instructions, must be observed by all persons who work on the machine. In addition, the rules and regulations for accident prevention applicable at the place of use must be obeyed.

The following safety instructions must be observed absolutely. They are an essential and indispensable part of the user documentation. Non-compliance can result in failure of warranty claims.

It is recommended in the interests of all involved to enter all installation measures, maintenance, fault and repair cases, training courses, instructions and special occurrences in a logbook assigned to the machine.



**This symbol highlights a safety instruction which must be followed to avoid danger to people or to the pump.**



**This symbol means: Beware of high voltage.**

### 7.1 Obligation of the operating organisation

The operating organisation must ensure that people who work on the machine are familiar with and comply with the regulations concerning working safety and accident prevention.

### 7.2 Organisational measures

The personal protective equipment required must be provided by the operating organisation. Safety devices must be checked regularly.

## 7.3 Obligation of the operators

People who work on the machine must observe the relevant safety regulations concerning working safety and accident prevention before starting work; must read the safety chapter and the warning notes in these operating instructions.

## 7.4 Personnel training

Only trained people may work on the machine. Their responsibilities must be defined clearly for assembly, start-up, operation, setting, maintenance and repairing.

## 7.5 Safety measures

The operating instructions must be kept with the machine. General and local regulations for accident prevention and environmental protection, and the operating instructions, must be observed. Safety and danger warnings on the machine must be legible.

## 7.6 Dangers when handling the machine

The MasoSine pump is built according to state-of-the-art principles and the recognised safety engineering rules. Nevertheless, danger to life and limb of the user or third persons, or impairments to the machine or to other assets, can arise in its use.

The machine must be used only:

- for its intended use
- if it is in a safe engineering condition.

Faults which can impede safety must be rectified immediately.



## 7.7 Safety measures in normal operation

Operate the machine only if all protective devices are functioning. Before switching the machine on make sure that no one can be endangered when the machine starts. At least once per shift inspect the machine for damage and for proper functioning of the safety devices.

## 7.8 Protective devices

All protective devices must be attached correctly and functioning before every start-up. Protective devices may be removed only after the machine has stopped and protection measures against restarting the machine have been taken.

After spare parts have been fitted, protective devices must be attached according to the operating organisation's regulations.

If contact with hot or cold machine parts could be dangerous, protection must be provided for the pump user.

## 7.9 Dangers due to hazardous pumped material

If hazardous material is to be pumped, the appropriate regulations must be observed.

## 7.10 Dangers due to electrical energy

Work on the electrical supply must be performed only by an electrician.



**Check the electrical equipment of the machine regularly. Rectify loose connections and scorched cables immediately.**

Keep the control cabinet locked closed or secured with a tool. Access is allowed only to authorised personnel.

If work on parts conducting voltage must be done, call in a second person to switch off the mains power if necessary.

Electrical connection of the pump must be made according to local regulations, by skilled personnel only.

## 7.11 Dangers due to hydraulic energy

Only personnel with special knowledge and experience in hydraulics may work on hydraulic devices.


Relieve the pressure in the system sections and pressure lines to be opened before starting repair work.

Replace hydraulic hose lines at appropriate intervals, even if no safety-relevant defects are detectable.

## 7.12 Special danger points



The pump contains a rotating rotor, which can crush or sever fingers and hands. The pump must be guarded so that it is not possible for people to hold the pump by its inlet or delivery ports with the rotor running. When the rotor is stationary, the drive must be secured against unintentional start-up. Increased danger exists if pipes are dismantled or the pump is open.

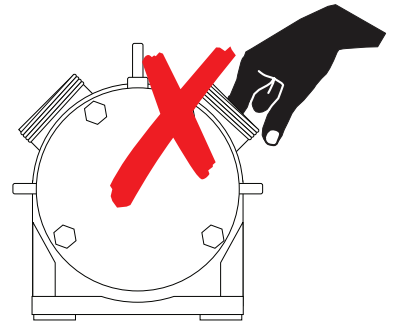

## 7.13 Constructional changes to the machine

Make no changes, attachments or conversions to the machine without the manufacturer's approval. All conversion measures require the written confirmation of Watson-Marlow MasoSine.

Replace machine parts which are not in perfect condition immediately. Use only original spare and wearing parts. Parts not obtained from MasoSine are not guaranteed to be designed and manufactured in compliance with load and safety requirements.

The warranty is invalid if genuine spare parts from MasoSine are not used.

## 7.14 Noise

The continuous sound pressure level proceeding from the machine should not exceed 70 dB(A). Higher sound pressure levels that can cause deafness can arise, depending upon local conditions. If this occurs, protect the operating personnel with appropriate protective equipment / protective measures.

## 7.15 Temperature



The pump bearing frame can heat up when in use and can reach a temperature of about 70°C. Caution should be exercised, as this can cause injury to the operator. In addition, the pump itself can heat up if hot product is transferred.

## 7.16 Limit values for the pump

The pump's maximum speed, maximum pressure and maximum temperature are included in the technical data sheet supplied with each pump. These limit values must not be exceeded in any circumstances. This applies in particular when using a frequency converter.

If pump is supplied without a drive, the following values apply:

	SPS 100	SPS 200	SPS 250	SPS 300	SPS 400	SPS 500
<b>Maximum pressure *</b>	10 bar	10 bar	15 bar	15 bar	15 bar	15 bar
<b>Maximum speed *</b>	1,000 rpm	1,000 rpm	800 rpm	600 rpm	600 rpm	600 rpm
<b>Maximum temperature *</b>	100°C	100°C	100°C	100°C	100°C	100°C
<b>Ambient temperature</b>	-12°C to +40°C	-12°C to +40°C	-12°C to +40°C	-12°C to +40°C	-12°C to +40°C	-12°C to +40°C

\* These limits may be lower, depending on the drive, the application and the rating of the pump. (See your purchase order confirmation, or contact MasoSine and give your pump's serial number.) On customer request, higher pressures and temperatures are possible.

## 7.17 Maintenance and repair

Inform operating personnel before starting maintenance and repair work. Protect all plant parts and operating media connected before and after the machine, such as compressed air and hydraulics, against unintentional start-up. In all maintenance, inspection and repair work, switch the machine off and secure the main switch against unintentional start-up.

Secure larger assemblies carefully to lifting gear. Check loosened screw connections for firm seating. Use only original spare parts.



**After maintenance work is finished, check the safety devices for function.**

## Bearings maintenance

- The bearings of **SPS 100** pumps must be renewed after running for the periods shown in the table below.

	200 rpm	400 rpm	600 rpm	800 rpm	1,000 rpm
<b>5 bar</b>	10,000 hours	10,000 hours	6,986 hours	5,239 hours	4,191 hours
<b>10 bar</b>	2,079 hours	1,040 hours	693 hours	520 hours	416 hours

- We recommend renewing the bearings of **SPS 200** pumps with **cast iron** power frames after running for 10,000 hours at any pressure.
- We recommend renewing the bearings of **SPS 200** pumps with **stainless steel** power frames after running for the periods shown in the table below.

	200 rpm	400 rpm	600 rpm	1,000 rpm
<b>5 bar</b>	10,000 hours	10,000 hours	10,000 hours	10,000 hours
<b>10 bar</b>	10,000 hours	10,000 hours	10,000 hours	6,260 hours

- We recommend renewing the bearings of **SPS 250** pumps with **stainless steel** power frames after running for 10,000 hours at any pressure.
- We recommend renewing the bearings of **SPS 300** pumps with **cast iron** or **stainless steel** power frames after running for 10,000 hours at any pressure.
- We recommend renewing the bearings of **SPS 400** pumps' with **cast iron** power frames after running for the periods shown in the table below.

	200 rpm	400 rpm	600 rpm
<b>5 bar</b>	10,000 hours	10,000 hours	10,000 hours
<b>10 bar</b>	10,000 hours	10,000 hours	10,000 hours
<b>15 bar</b>	10,000 hours	7,689 hours	5,126 hours

- We recommend renewing the bearings of **SPS 400** pumps with **stainless steel** power frames after running for the periods shown in the table below.

	200 rpm	400 rpm	600 rpm
<b>5 bar</b>	10,000 hours	10,000 hours	10,000 hours
<b>10 bar</b>	10,000 hours	10,000 hours	10,000 hours
<b>15 bar</b>	10,000 hours	7,210 hours	4,800 hours

- We recommend renewing the bearings of **SPS 500** pumps with **stainless steel** power frames after running for the periods shown in the table below.

	200 rpm	400 rpm	600 rpm
<b>5 bar</b>	10,000 hours	10,000 hours	10,000 hours
<b>10 bar</b>	10,000 hours	10,000 hours	10,000 hours
<b>15 bar</b>	10,000 hours	10,000 hours	7,500 hours

**Note:** Remove the bearing housing of SPS 200, SPS 300 and SPS 400 models only to replace or adjust the shim ring (see 21 *Adjusting the shaft*). Do not attempt to dismantle the power end of the pump or replace the bearings. Pumps needing repair, servicing, new bearings or other work on the power end must be returned to MasoSine for attention. Special training is available for users of SPS 200, SPS 250, SPS 300, SPS 400 and SPS 500 models. Please contact MasoSine for further information.

## 7.18 Cleaning the pump

Handle substances and materials used correctly, especially when working on lubricating systems and when cleaning with solvents. For information on cleaning the parts in contact with the pumped fluid, see 17 *Cleaning*.

## 7.19 Faults

If an operating fault occurs, switch off the machine and secure it against unintentional start-up.

## 7.20 Use as intended

The intended use of this product is listed in the order confirmation. The product should not be put to a different use or a use going beyond the use described.

Consult MasoSine if you wish to change the product, its pressure, speed or operating temperature.

## 8 Safety notes (ATEX)

If your MasoSine pump is to be used in production machinery in potentially explosive atmospheres, it will be equipped accordingly from the factory.

### 8.1 Safety signs

The following ATEX symbols are only given as an example.

The specific ATEX classification is printed on the nameplate and the certificate of conformance provided with every ATEX pump.

 II 2 G c IIB T4      II 2 D c T = 120C



Grounding symbol

#### Pump classification

MasoSine pumps are designed for continuous duty and are therefore assigned to the Device Group II – Application field “dust – or gas – explosive areas”.

#### Zone classification

MasoSine pumps can be used in explosive areas of zone 1 / 21. This corresponds to the category 2 G / D.



**It is expressly forbidden to use the pumps in zone 0.**

#### Classification of explosive atmospheres

A distinction is made between dust and gas explosive atmospheres. In the model code, the atmosphere is abbreviated with G (Gas) and D (Dust). MasoSine pumps are designed to be used in explosive atmospheres G (Gas) or D (Dust).

#### Ignition protection

MasoSine pumps are subject to ignition protection “c” constructive safety, according to the standard for non-electric appliances for use in explosion-risk areas, EN 13463-5.

#### Temperature classes

- EX II 2 G c IIB T4  $\geq 135^{\circ}\text{C}$
- EX II 2 D c T = 120C

## 8.2 Earthing the pump

SPS pumps are equipped with an earthing point.

The pump must be earthed by an earthing cable secured to the correct position. SPS 100 must be earthed at the base of the rear foot. Other models must be earthed as shown: with cast iron power frame, right; with stainless steel power frame, below right. This is particularly important in potentially explosive atmospheres.



**In addition to earthing the pump, the drive motor must also be earthed. If the drive is not earthed, the pump unit may not be operated.**



## 8.3 Material properties

The plastic parts fitted inside the pump react more to temperature changes than stainless steel parts. For this reason, the specified maximum fluid temperature for which the pump is designed must not be exceeded. This temperature is included in your purchase documents. If the specified temperature is exceeded, linear expansion may block the pump; this in turn could cause the pump to fail or could result in damage to parts of the pump. In addition, excessive temperatures can accelerate the wear of dynamic parts and reduce the life of plastic parts.

Corrosion may occur to a pump's cast iron power frame if the paintwork is damaged. Corrosion represents a hazard for the use of pumps in potentially explosive atmospheres (for measures, see 20 *Troubleshooting*).

Pumps with a stainless steel power frame are not subject to power frame corrosion.

## 8.4 Pressure conditions

A pressure controller must be installed to avoid over-pressure in the pump as a result of a closed pressure line.

## 8.5 Maintenance and repair

- Fill the pump with product before starting only outside the explosive atmosphere area. All tools used should comply with ATEX regulations.
- The pump unit must be kept free of dust with a damp cloth: accumulated dust can smoulder.
- The flushing channels in the power frame must be free of blockages and, if necessary, cleaned.

## 8.6 Cleaning the pump



No solvent cleaning agents may be used to clean the pump as they could create an uncontrollable explosive atmosphere.

## 8.7 Medium to be pumped

Carbon-sulfur compounds and chemicals with an ignition temperature below 120°C must not be pumped.

## 8.8 Coupling

If the pump is used in potentially explosive atmospheres, it must be coupled to the drive by means of an elastic, positive coupling with ATEX certification for use with the pump. Chains, toothed belts, V-belts or similar equipment which may transmit radial forces to the bearings should not be used.


## 8.9 Drive

Any reduction gears in the drive chain and control units must be ATEX-certified for use with the pump. Combustion engines must never be used.

An inverter must be installed away from potentially explosive atmospheres, or have the same ATEX certification as the pump. In any case the inverter must have the properties required for operation in potentially explosive atmospheres: temperature monitoring, speed limitation, etc.

## 9 Pump specifications

Your pump carries a type plate on the bearing housing. It includes a serial number, which identifies the features of the product. The serial number also appears on the technical data sheet.

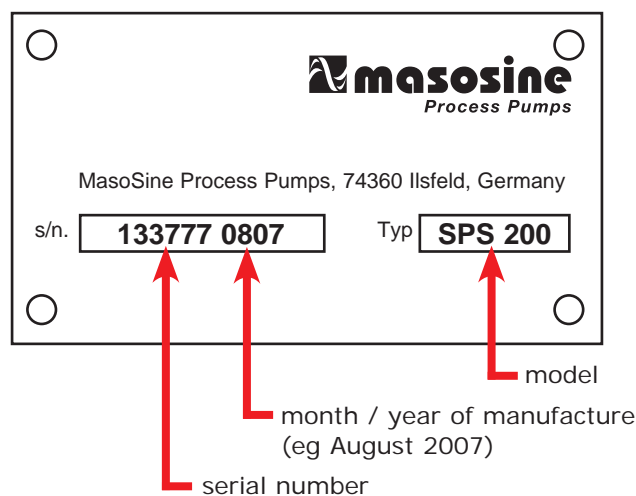




## Standards

<b>Relevant EC directives</b>	2006/42/EC: EC Machinery Directive
	73/23/EEC: EC Low Voltage Directive
	2004/108/EC: EMC Directives
	97/23/EG: Pressure Equipment Directive
<b>EC harmonised standards</b>	Safety of machinery—electrical equipment of machines: EN 60204-1
	EN ISO 12100, 1-2 : Safety of machinery
	For ATEX: EN 1127-1: Explosive atmospheres— Explosion prevention and protection Part 1
	For ATEX: EN 13463-1: Non-electrical equipment for use in potentially explosive atmospheres Part 1
	For ATEX: EN 13463-5: Non-electrical equipment for use in potentially explosive atmospheres Part 5
<b>National technical standards, guidelines and specifications</b>	EN 809: Pumps and pump units for liquids— Common safety requirements
	DIN 31000/A1: General principles for the safe design of technical products (Amendment 1)
	DIN 11850: Pipes made of stainless steel for food and chemical industries
	DIN 11851: Stainless steel fittings for the food and chemical industry - Screw pipe connections for expanding and welding


## 9.1 Dimensions (in millimetres)

### SPS 100

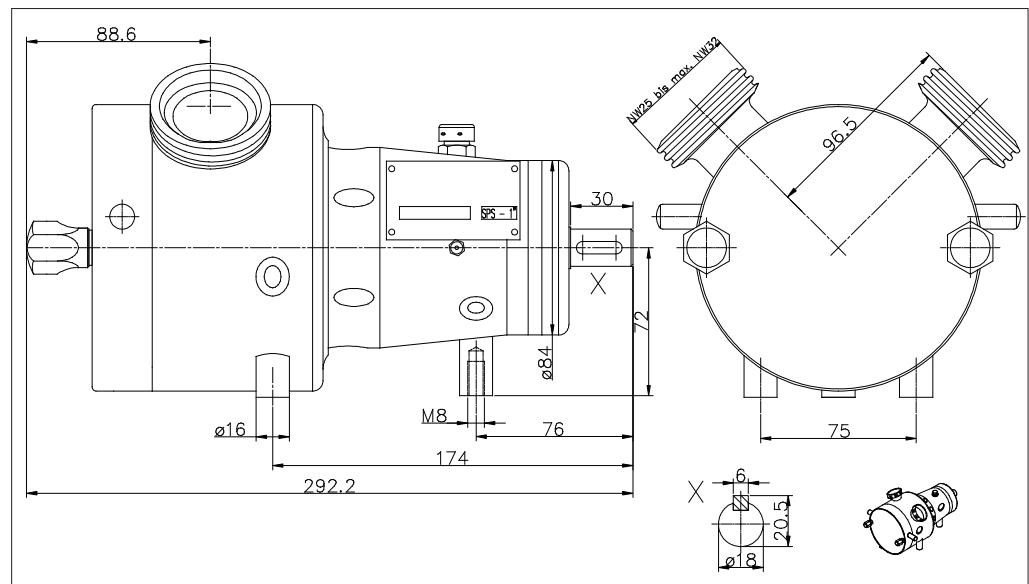


## SPS 200 pumps, dimensions

### Cast iron power frame

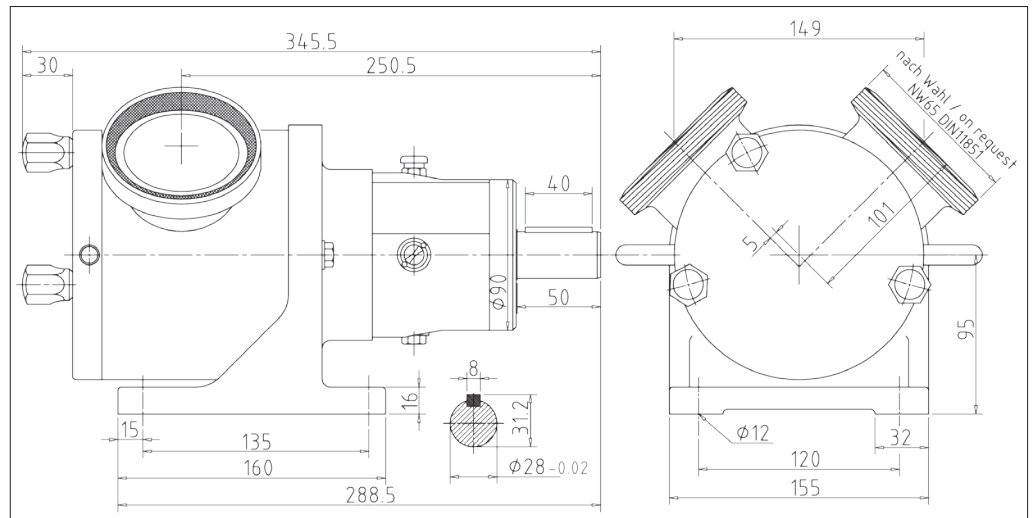


### Stainless steel power frame

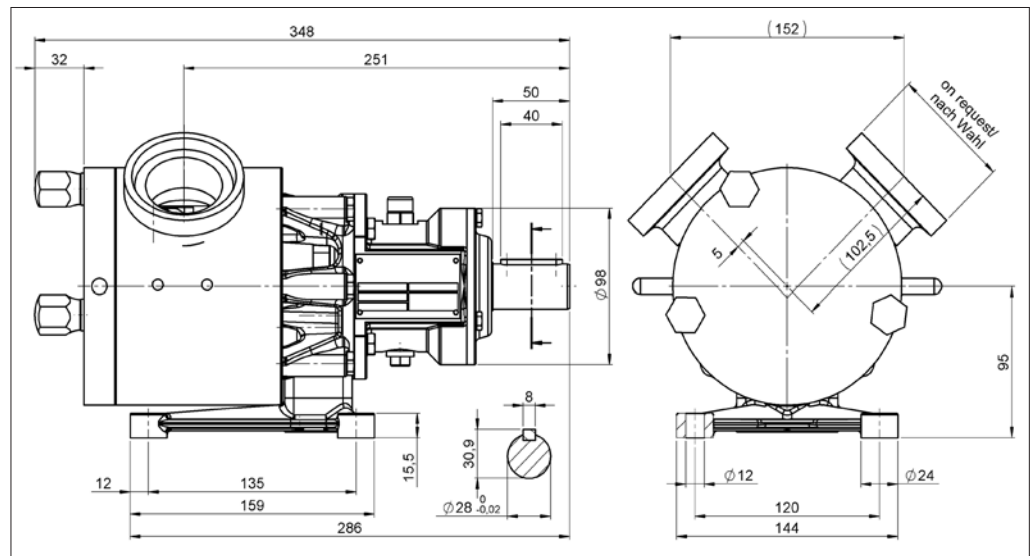

All critical dimensions of old and new power frame designs are the same, including mounting bolt holes. Both designs are interchangeable


## SPS 250 pumps, dimensions

### Stainless steel power frame

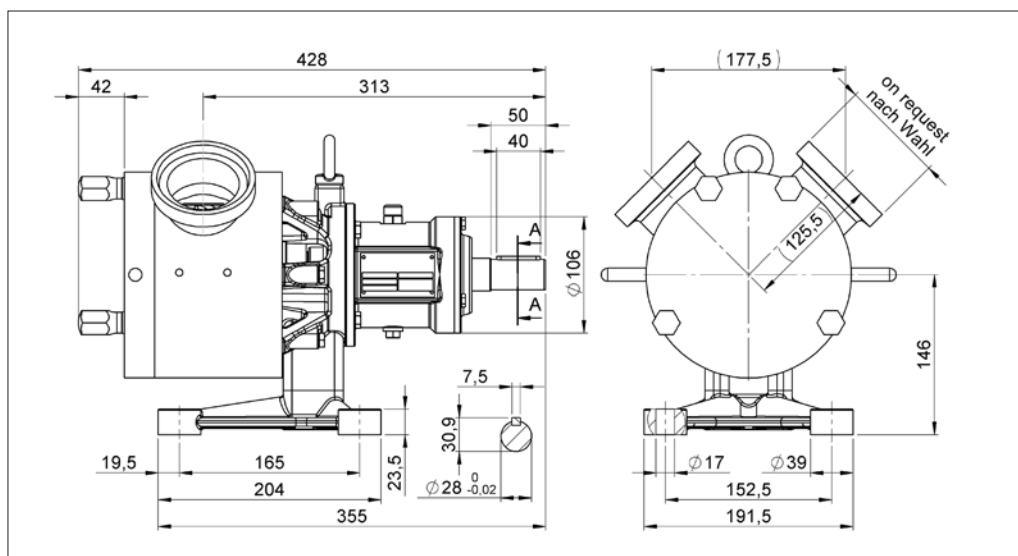


## SPS 300 pumps, dimensions

### Cast iron power frame

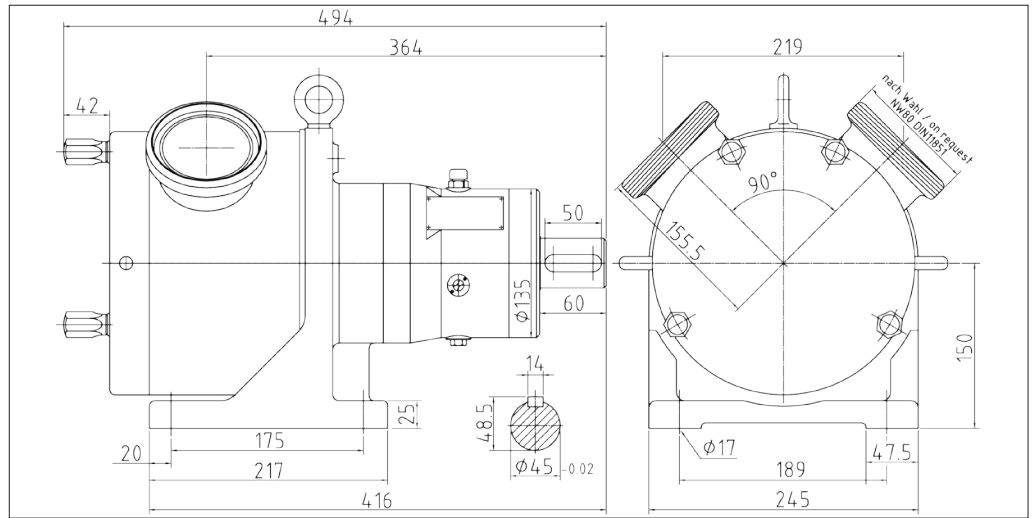


### Stainless steel power frame

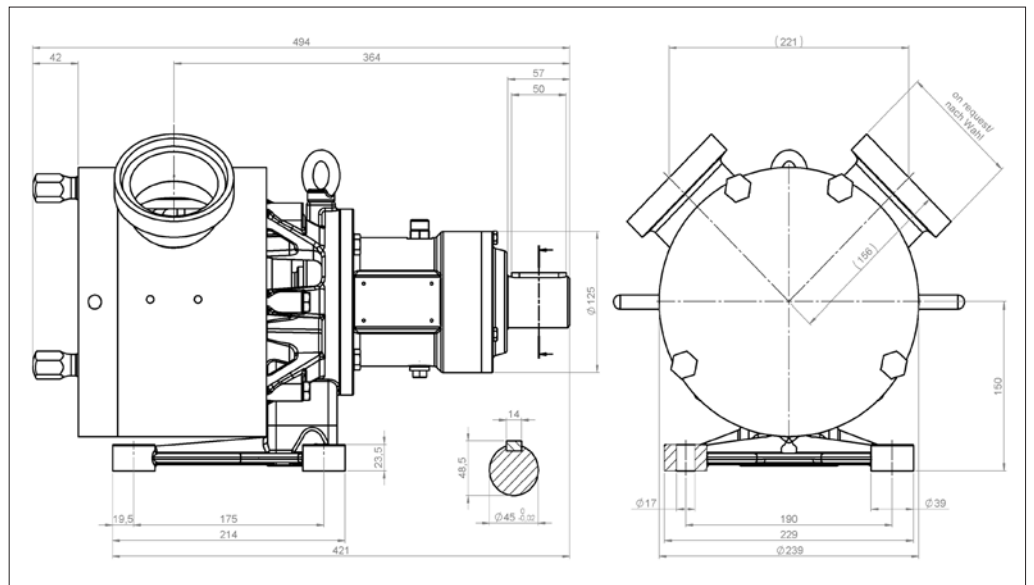


All critical dimensions of old and new power frame designs are the same, including mounting bolt holes. Both designs are interchangeable

## SPS 400 pumps, dimensions

### Cast iron power frame

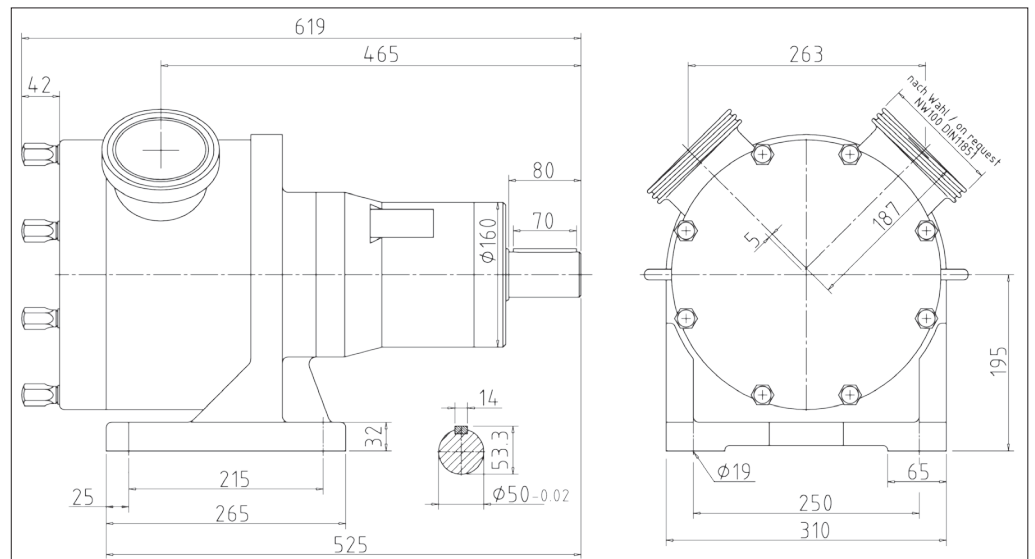


### Stainless steel power frame

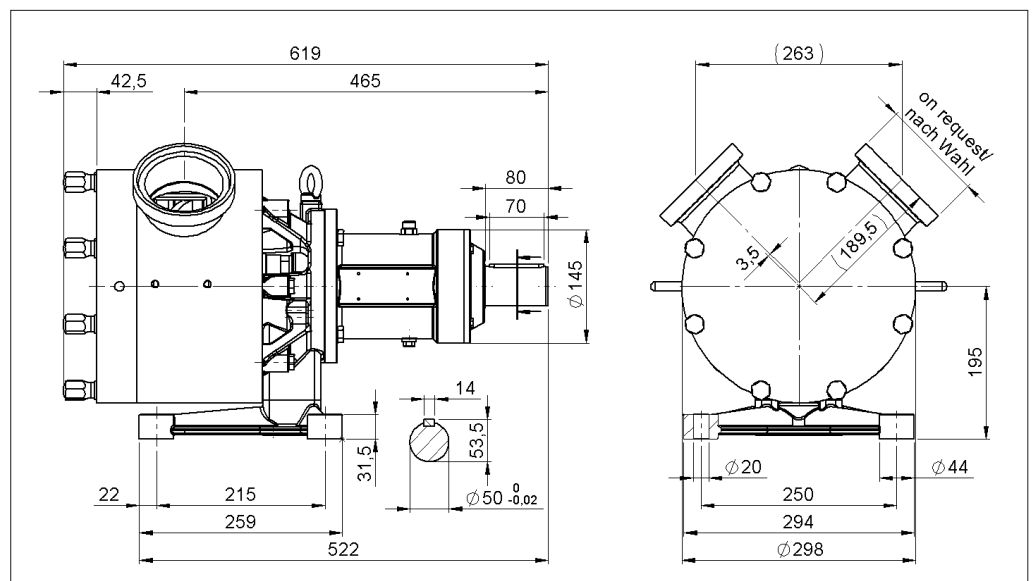

All critical dimensions of old and new power frame designs are the same, including mounting bolt holes. Both designs are interchangeable

## SPS 500 pumps, dimensions

### Stainless steel power frame

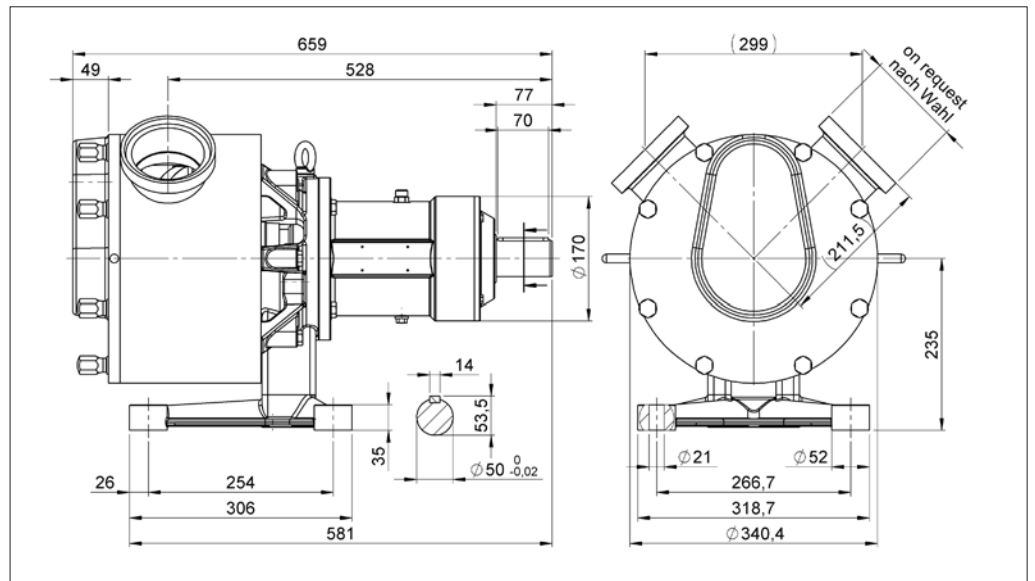


### Unit weights

	Pump weight, cast power frame	Pump weight, stainless steel power frame	Weight of standard baseplate
<b>SPS 100</b>		17.00kg 37lb 8oz	Part no: KK-... 13.00kg 28lb 11oz
<b>SPS 200</b>	23.00kg 50lb 11oz	20.00kg 44lb 1oz	Part no: KK-... 13.00kg 28lb 11oz
<b>SPS 250</b>		39.00kg 86lb	Part no: KK-... 13.00kg 28lb 11oz
<b>SPS 300</b>	80.00kg 176lb 6oz	68.00kg 149lb 15oz	Part no: KM-... 19.00kg 41lb 14oz
<b>SPS 400</b>	160.00kg 352lb 12oz	125.00kg 275lb 9oz	Part no: KG-... 31.00kg 68lb 5oz
<b>SPS 500</b>		171.00kg 377lb	Part no: KG-... 31.00kg 68lb 5oz

## 10 Transport


Choose the means of transport according to the size of the pump and the drive. The pump must be suspended correctly for transport. If using a crane or a fork-lift truck, the ropes or belts must be sufficiently dimensioned. If the pump is transported with a lift truck or a fork-lift truck, note that the unit's centre point is not necessarily the centre of gravity.

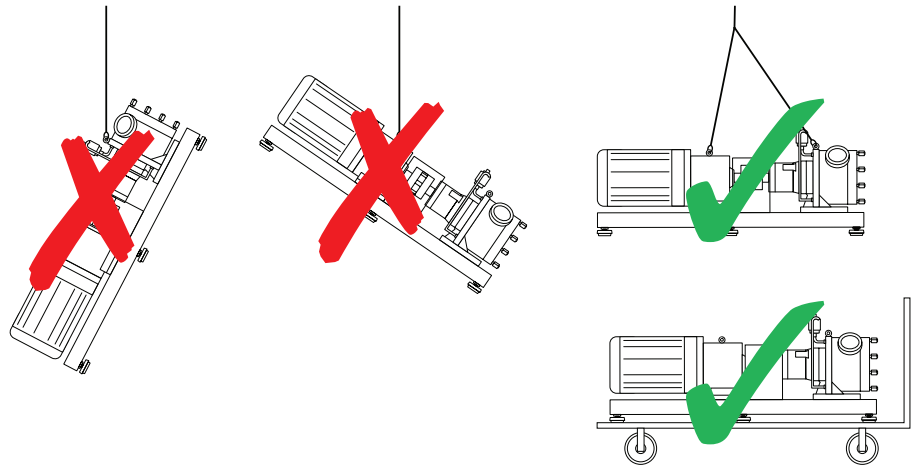


## 11 Installation



The motor shaft and pump shaft connection must be guarded to protect the user from contact.

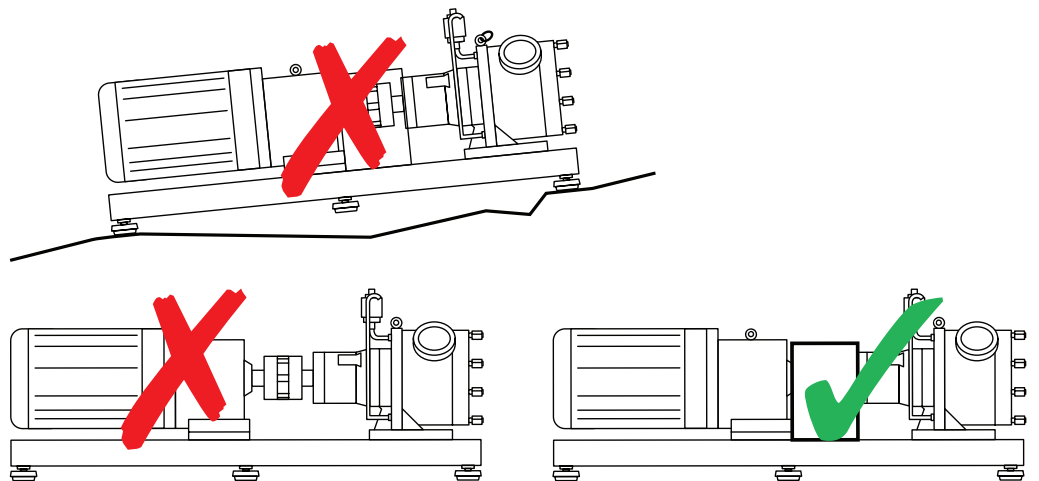

- Place the pump on a level surface.
- Do not start the pump without a guard to protect the user from contact.
- The mounting surface should be strong enough to support the pump.
- There should be sufficient space for maintenance work around the pump.
- The motor must receive an adequate air supply.
- If the pump is used in potentially explosive atmospheres, an Ex-protected motor must be used. Contact the manufacturers for assistance.
- The unit must be protected against static charge.

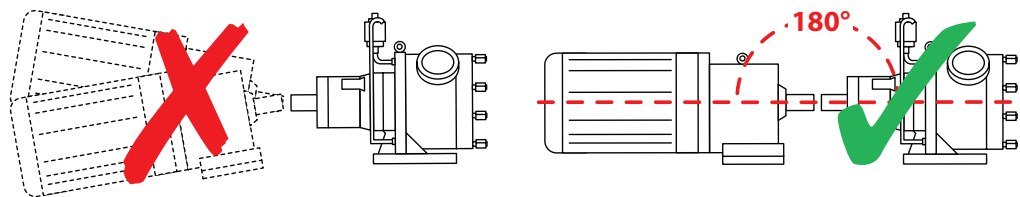

- Align the pump shaft with the drive shaft.

## 12 Connection to the piping



Before connection, clean the piping and remove foreign bodies such as welding residues.



Fit elastic intermediate members (compensators) between pump and fixed piping on the suction and pressure sides, to stop pump vibrations being transmitted to the piping system.



Avoid forces and torques acting from the piping on the pump connections (e.g. distortion, expansion due to temperatures etc.).



The piping on the pressure side of the pump should run upwards from the pump, so that residual liquid can flow back into the pump when pumping stops, and total dry running is avoided. Fluid left in the pump facilitates suction when pumping re-starts.



The user must ensure that a pressure rise above the pressure agreed in the purchase order and listed in the technical data sheet is not possible.



MasoSine pumps normally run with such a low resonant frequency that no damage results. However, particularly when running with inverters,

certain frequencies can cause interference vibrations which must be avoided. It is important during commissioning to ascertain whether such vibrations exist and to define them, so that the inverter can be programmed to avoid these frequencies. Similarly, interference from cavitation or rigid lines must be avoided. See 12.1 *Cavitation*.



## 12.1 Cavitation

Cavitation is a problem in certain devices where fluid interacts with a moving surface. It can occasionally occur in sinusoidal pumps.

Where a surface moves through a fluid, low pressure areas are formed on the surface. The faster the surface moves, the lower the pressure around it can become. If the static pressure of the liquid falls below its vapour pressure, vapour bubbles form on the pressure side. These implode, causing very high, short-term pressure peaks up to several thousand bar. These pressure peaks can cause material erosion and are noisy.

### To identify cavitation

If the pump is very noisy and vibrates vigorously, along with the pipe system attached to the pump, cavitation is likely to be the cause.

### To avoid or remove cavitation


Increasing the inlet pressure on the suction side, installing a larger diameter or shorter inlet pipe or slowing the pump may solve the problem. Make sure that the pump is not starved of duty fluid at all times.



**Cavitation can destroy the pump. The operator must ensure that the pump can work free of cavitation.**

## 13 Possible pump orientations

The pump can be positioned in three orientations, and rotate clockwise or counter-clockwise.

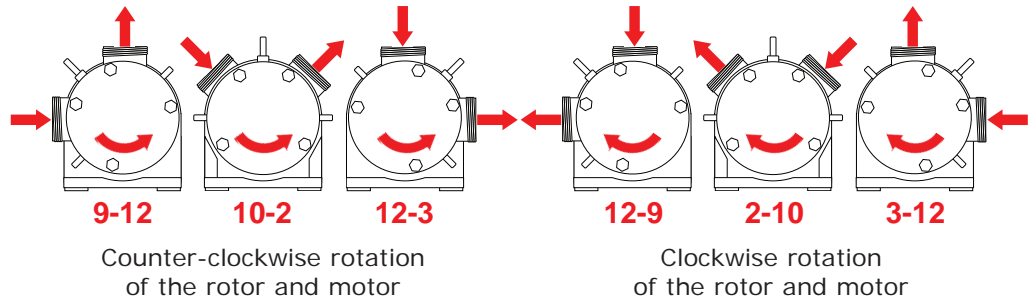


Unless ordered otherwise, the pump is delivered in position 2-10. Special customised nozzle orientations are possible.

### 13.1 Changing the pump orientation



**Disconnect the pump from the mains power, and secure it against unintentional start-up.**

#### SPS 100

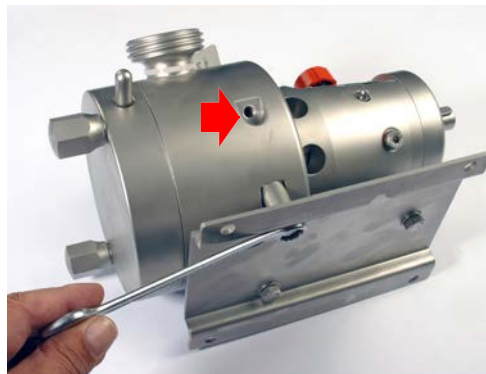

- Turn the pump on to its side to allow access to the baseplate securing bolts.
- Remove the three bolts and washers using a 13mm spanner. As each bolt is withdrawn, a spacer between the baseplate and the pump will fall out.
- Three sets of threaded fixing points are provided on the pump; the central set (pictured in use above) allows the inlet and outlet ports to be positioned at 10-2 or 2-10; the other sets (one fixing point arrowed) allow the pump to be positioned with the inlet or outlet horizontal and the other port vertical.
- Pass the bolts with washers through the baseplate and the spacers (**Note:** the longer bolt and the longer spacer secure the baseplate to the bearing housing at the rear of the pump). Screw the bolts into the set of fixing points appropriate for the desired pump orientation. Tighten to 25Nm using a 13mm spanner.

#### SPS 200, SPS 250 SPS 300, SPS 400, SPS 500


- Follow the dismantling and assembly steps for your pump model. See 22 *Dismantling and assembly*
- Remove the screws on the power frame. Turn the housing by an angle of 45° to the left or right.
- Refit the screws in their new position and tighten them to the correct torque:  
SPS 200: 16 Nm SPS 250: 16 Nm SPS 300: 33 Nm SPS 400: 56 Nm SPS 500: 56 Nm

**Note:** If the direction of flow is also changed, the gate and gate guide must be reversed. See 13.2 *Changing rotation direction*.


Take care that fluid in the pressure line leaves the pump in an upward direction, so that when pumping stops, some fluid remains in the pump. This will make it easier for the pump to draw in viscous products when pumping restarts. This applies particularly when the pressure connection is horizontal: positions 12-3 and 12-9. Take care that the pressure line is run so that the pump rotor is always covered with fluid, and dry running is avoided.

## 13.2 Changing rotation direction

When the direction of rotor rotation is reversed, the suction side and the pressure side of the pump are exchanged. The orientation of the gate and the gate guide must be changed, too, or the pump cannot pump efficiently. **The pump can run for only a short time with the gate and the gate guide wrongly oriented, and it will not achieve more than 2 bar pressure.** See 22 *Dismantling and assembly*. SPS 100 is shown here. All models are similar.

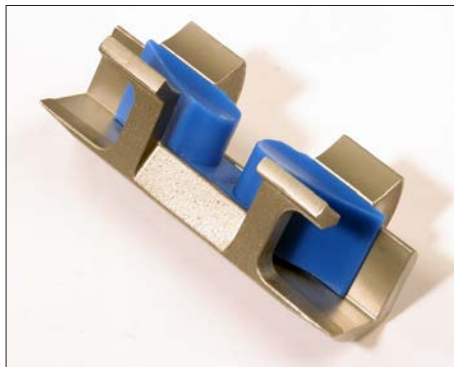


The gate and gate guide shown inverted to make clear the gate's position within the guide for counter-clockwise rotor rotation



The gate and gate guide oriented for clockwise rotor rotation

The gate and gate guide oriented for counter-clockwise rotor rotation



If the direction of rotation is reversed, change the rotation direction indicator arrows and mark the suction and pressure ports correspondingly.



**Disconnect the pump from the mains power, and secure it against unintentional start-up. Ensure that the direction change is carried out by a trained engineer.**

- Follow the dismantling and assembly steps for your pump model. See 22 *Dismantling and assembly*
- Take special note of the instructions for fitting the rotor, the gate and the gate guide

Take care that fluid in the pressure line leaves the pump in an upward direction, so that when pumping stops, some fluid remains in the pump. This will make it easier for the pump to draw in viscous products when pumping restarts. This applies particularly when the pressure connection is horizontal: positions 12-3 and 12-9. Take care that the pressure line is run so that the pump rotor is always covered with fluid, and dry running is avoided.

## 14 Connecting this product to a power supply



The motor must be connected according to local regulations by a qualified person. See the instruction manual supplied with your drive motor.

## 15 Start-up and operation

- If you are starting the pump for the first time, or have performed cleaning or repair work, check first that all screws are correctly and completely tightened.
- The pump may have been contaminated during transport. Remove the pump front cover and clean if necessary before start-up.
- Before you start the pump, check that the gate and the gate guide are in the correct orientation in relation to the suction side and the pressure side of the pump. (See 13.2 *Changing rotation direction*).




**Observe the appropriate regulations if hazardous fluid is to be pumped.**



**Ensure that the pump is installed in an appropriate position with all necessary safety guards and precautions (sensors, switches, pressure gauges, etc).**

MasoSine pumps must be primed before use. Before commissioning and during operation, the pump must be filled with fluid, with the fluid level above the rotor (see diagram). This can be done manually through a side channel of your system's pipework, or by using a vacuum device where very viscous fluids are to be pumped; contact MasoSine for further information. The need to prime can be avoided by leaving product in the pump after it is stopped; by leaving CIP or SIP fluid in the pump after cleaning. For ATEX use, fill the pump away from potentially explosive atmosphere, and be aware that **if the pump runs dry, the temperature limit for the explosive area may be exceeded.**

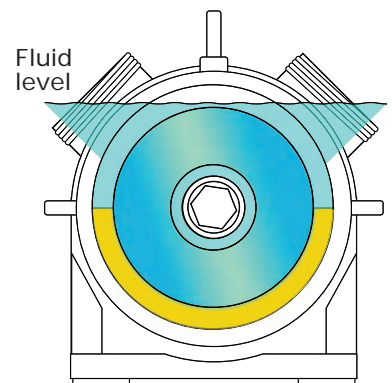



Make sure before start-up that all valves on the pressure and suction sides are open. The pump must not pump against a closed valve without an over-pressure valve.



If the pump leaks, stop pumping as quickly as possible and replace the damaged sealing elements. See 22 *Dismantling and assembly* and 25.2 *Seals*.



The operator must ensure that the pump can work free of cavitation. Cavitation can destroy the pump. See 12.1 *Cavitation*.

## 16 Flushing the seal system


Flushing fluid at atmospheric pressure—usually water—flushes the area behind the seal system and prevents the product from hardening and damaging the seal system. If a static flushing device is fitted, the flushing fluid fills the area behind the seal.

- Cast iron power frame: If no static flushing device is fitted, adapt a fitting and a tube to the threads of the intake and outlet in the power frame (see diagram below; models differ) and circulate flushing fluid through the system.
- Stainless steel power frame: Make sure that the correct flush ring is installed with tube connections and circulate flushing fluid through the system.
- The flushing medium must be at least suitable to the product being pumped. It should not contain abrasive particles, which would damage the seals. We recommend that transparent plastic tubes are used as flushing tubes.
- The pump should be flushed without pressure: the flushing fluid should be allowed to drain from the system without pressure.
- Fill the pump with liquid to prevent it from running dry, possibly via a separate intake valve connected to the suction or pressure pipe.
- If your pump is set up for permanent flushing, always check the intake and outlet (see diagram below).

### 16.1 Static flushing device

Before commissioning, fill the flushing device (if supplied) with a suitable flushing fluid, depending on the product being pumped. Fill the sight glass with flushing fluid until the fluid level is just below the bend in the outlet pipe.

**Note:** The diagram shows a flushing device fitted to a pump with a cast iron frame. Pumps with stainless steel frames are similar.

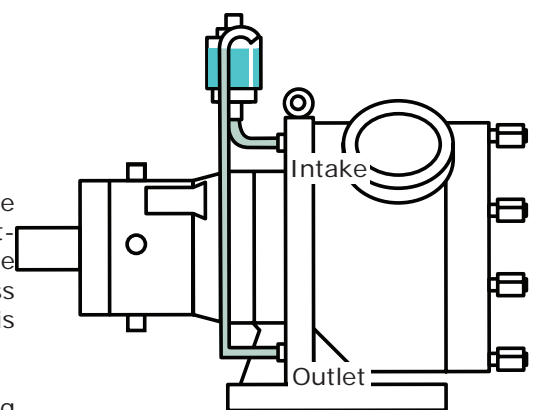

# 17 Cleaning and sterilisation

MasoSine SPS pumps may be cleaned in place. Please follow our CIP cleaning instructions—see below.

Maintaining a clean process line is vital to maintain a high level of hygiene and no contamination of an end-product. Contamination costs time and money.

The heat or chemical reaction from clean-in-place (CIP) and steam-in-place (SIP) cleaning processes damages a living cell's essential structures, including the cytoplasmic membrane, rendering the cell no longer viable.

The process automatically re-circulates cleaning detergent and rinse solutions.

## The benefits of clean-in-place (CIP) and steam-in-place (SIP)

- Cleaning is faster
- Cleaning is less labour-intensive
- Cleaning is repeatable
- There is a reduced chance of operators being exposed to hazardous chemicals

## Clean-in-place (CIP) for MasoSine products

Clean-in-place (CIP) is a method of cleaning the interior surfaces of pipes, vessels, process equipment and associated fittings without disassembling.


### The CIP procedure

- Before the CIP process begins, a preliminary clean should be performed at maximum speed with no back pressure. This will remove most of the residual product.
- Suitable cleaning fluids for the CIP process may include concentrations below 1% of additives. They may be:
  - Sodium hydroxide in distilled water
  - Nitric acid in distilled water
  - Phosphoric acid in distilled water
- CIP cleaning can be carried out between 80°C and 90°C as standard.
- Cleaning should be done at maximum pump speed to achieve a good cleaning result.
- It is very important that the differential pressure on the discharge side of the pump is at least 3.0 bar / 43.5 psi higher than the pressure on the suction side of the pump during the CIP process.



**Attention:** Keep a minimum distance of 50cm from the pump while performing high-pressure cleaning.

- A choke valve should be installed in the discharge pipeline immediately after the pump. Close the choke valve slowly until the pressure difference is correct.
- The CIP time for the pump is in accordance with the time required for system cleaning: usually 20-40 minutes.

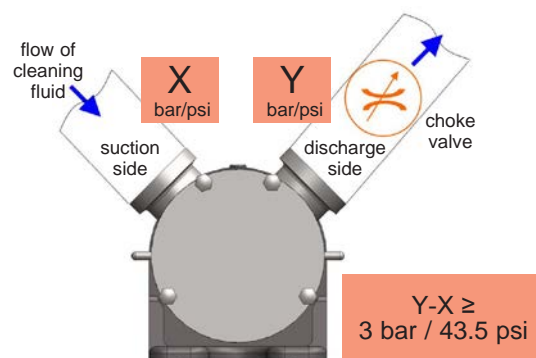

### Steam-in-place (SIP) for MasoSine products

Steam sterilisation kills micro-organisms through the application of moist heat (saturated steam) under pressure without disassembly.

- Sterilising the pump with standard equipment is possible up to 120°C only at standstill.
- The pressure should be high enough to ensure that the steam reaches all parts of the static pump through the existing clearances.

Class II SIP and CIP procedure	Maximum temperature	Recommended pressure differential
CIP	80-90°C / 176-194°F	3 bar
SIP	120°C / 248°F	-

### Key CIP and SIP safety information

- A distance of one metre around the pump should be kept clear during SIP to minimise danger in case of leakage.
- CIP and SIP processes should be monitored continuously.
- If a leak occurs during CIP or SIP, the pumphead should not be touched until system pressure has been relieved and the pumphead has been allowed to cool down.
- Ensure that an acclimatisation period is observed after SIP before the pump process is started. The temperature inside a standard pump should not exceed 85C (176F) during operation.



## 18 Heating and cooling option

Special versions of MasoSine SPS 100, SPS 200, SPS 250, SPS 300, SPS 400 and SPS 500 pumps can be heated or cooled to provide the correct temperature for your process—pumping chocolate or ice cream, for example—by passing fluid at the temperature required through crescent-shaped channels in the pump housing and the front housing. The pump has 1/4in or 1/8in connections on two sides through which the heating or cooling agent flows. The position of the connections varies depending on the model. Counterpressure should not exceed 1 bar.

**Note:** Most pumps can be retro-fitted to allow heating and cooling.

**Note:** The connections on the front cover may hinder some maintenance work at the pump. In most cases, the heating / cooling of the pump housing is sufficient. Maintenance is not hindered by the connections.

**Note:** If a heater is used to maintain a raised temperature, that temperature must be approved by MasoSine.

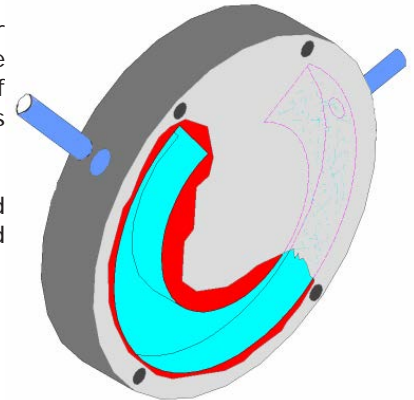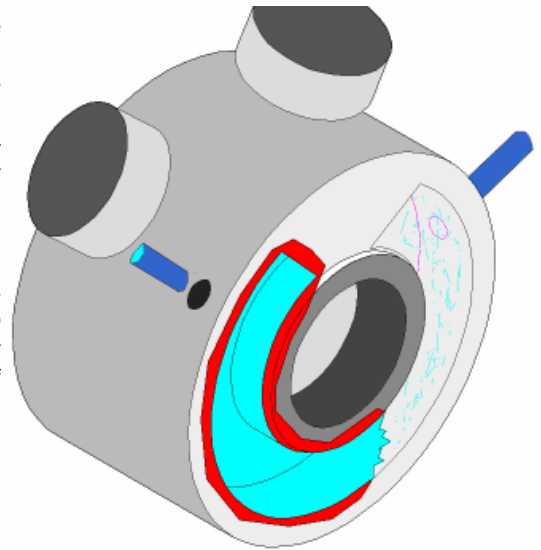

### Part numbers for heating and cooling options

	SPS 100	SPS 200	SPS 250	SPS 300	SPS 400	SPS 500
<b>Pump housing</b>	MP-HZG-G-SPS10	MP-HZG-G-SPS20	MP-HZG-G-SPS21	MP-HZG-G-SPS25	MP-HZG-G-SPS40	MP-HZG-G-SPS50
<b>Front cover</b>	MP-HZG-D-SPS10	MP-HZG-D-SPS20	MP-HZG-D-SPS21	MP-HZG-D-SPS25	MP-HZG-D-SPS40	MP-HZG-D-SPS50



## 19 Oil change


### SPS 100

Every day before using your pump, check that there is enough grease in the storage chamber. Remove the vent at **A** and insert grease through the nipple at **B** until grease starts to come out at **A**. Refit the vent.

Standard first filling, for -10 to 60°C (14 to 140°F): MOLYDUVAL Soraja C532, DIN 51502.

Grease grades for Ex zones:

- At temperature class T4 (60°C (140°F) or less: MOLYDUVAL Soraja C532, DIN 51502.
- At temperature class T3 (61 to 120°C (142 to 248°F) or less: MOLYDUVAL Pegasus KD 460.

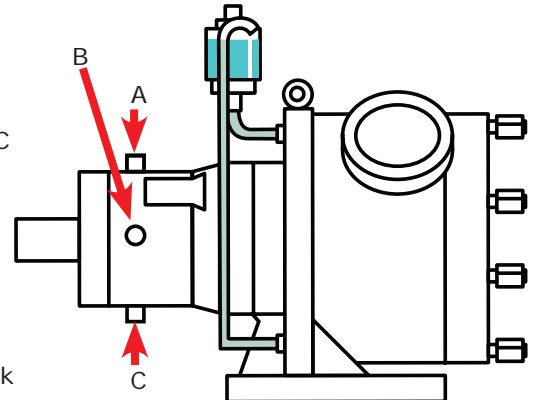

### SPS 200, SPS 250, SPS 300, SPS 400, SPS 500

Every day before using your pump, check the oil viewing glass at **B** (see 27 in the parts list, section 25) in the bearing housing (see 11 in the parts list, section 25.1) for damage and to confirm that enough oil is in the power frame. The oil should reach the middle of the glass.

- Check that the drain plug **C** is in place and fully tightened.
- Open port **A** and fill the power frame with suitable oil (see Note, below) until it is nearly full.
- Close port **A**.
- Check the oil level in viewing glass at **B**. Do not allow the level to fall below the viewing glass centre line.

**Note:** If the pump is intended to be used in an area where ATEX regulations apply, the oil viewing glass is replaced by a screwed plug.

**Note:** When a new pump is supplied, it is filled as standard with Klüberoil 4 UH 1-220 N lubrication oil for the food and pharmaceutical industries, which is suitable for process temperatures between -30°C (-22°F) and 120°C (248°F). **If the pump is intended to be used in an area where ATEX regulations apply, only this oil must be used.**

### Filling volumes

	SPS 200	SPS 250	SPS 300	SPS 400	SPS 500
Cast iron power frame	Approx 0.10 litre	-	Approx 0.18 litre	Approx 0.38 litre	-
Stainless steel power frame	Approx 0.10 litre	Approx 0.10 litre	Approx 0.18 litre	Approx 0.35 litre	Approx 0.45 litre

Dispose of used oil according to local regulations.

Oil or grease needs to be changed at least once a year.

## 20 Troubleshooting

Error	Cause	Remedy
Pump does not draw in	Direction of rotation not correct	Check direction of rotation
	No wetting liquid in pump	Fill pump with liquid
	Screw fastening not tight	Check screw fastening
	Suction pipe too long	Adapt suction pipe
	Suction pipe too narrow	Adapt suction pipe
	Shaft seal leaking	Check all seals for damage
	Wearing parts worn	Replace wearing parts
	Motor speed not correct	Measure and regulate speed
	Gate and gate guide wrongly positioned	Check position (see 13.2 <i>Changing rotation direction</i> )
Pump does not deliver	Direction of rotation not correct	Check direction of rotation
	Suction and pressure pipe confused	Check pipe system
	Motor speed not correct	Check pump speed against performance curves—see your purchase order
	Wearing parts worn	Replace wearing parts
	Gate and gate guide wrongly positioned	Check position (see 13.2 <i>Changing rotation direction</i> )
	Inserted gate valve closed	Check pipe system
Pump is noisy	Noises from the drive	Consult manufacturer
	Noises from the pump	Consult manufacturer
	Suction pipe too small (cavitation)	Shorten suction pipe or increase diameter, reduce speed
	Knocking noises from the pumphead	Check if gate is worn and replace if necessary
	Noises from power frame	Fill oil, change tapered roller bearings
	Coupling not aligned	Align coupling correctly. See 11 <i>Installation</i> .
Pump leaks	Sealing system is leaking	Change seal faces, static / dynamic or lip seals
	O-ring seal leaking	Replace O-ring
	Lip seal ring on the power frame leaking, oil escapes	Dismantle power frame, replace lip seals
Pump leaks at front housing	Housing seal not installed or wrongly installed	Install housing O-ring correctly or replace
	Housing seal defective	Install housing O-ring correctly or replace
Pump is blocked	Foreign body in the pump	Remove foreign body, examine pump for damage
	Power supply interrupted	Check electrical installation and fuses, check drive
	Defect in the drive	Separate the coupling and turn the pump by hand to confirm

Error	Cause	Remedy
Severe wear after short operating time	Solids in the pumped fluid	Change the wearing parts frequently; check material compatibility
	Pumped fluid is abrasive	Choose larger pump, reduce speed
Rotor has wear on one side	Rotor not tightened correctly on installation	Tighten shaft nut firmly on block
	Adjusting dimensions changed after working on the bearing housing	Check and correct dimension X: SPS 200 = 17.5 mm +0.1 ~ SPS 250 = 17.4 mm +0.1 SPS 300 = 23.0 mm +0.1 SPS 400 = 15.0 mm +0.1 SPS 500 = 25.4 mm +0.1 See 21 <i>Adjusting the shaft</i>
Pump not clean after CIP cleaning	Cleaning regulation not complied with. See 17 <i>Cleaning</i>	Choke on the pressure side: Check that the pressure difference is 3-4 bar
Rotor has seized on liner	Rotor not correctly tightened	Tighten shaft nut firmly on block
	Temperature too high (thermal expansion)	Choose liner with larger tolerances
Flushing material between housing and power frame leaking	O-ring in the power frame missing or defective	Install or replace O-ring
Water or pumped material in the bearing housing	Flushing pressure too high	Flushing must be pressure-less (attach pressure reducer, maximum 0.1 bar)
	Leakage bores—bore holes in the power frame where pumped material can escape if the seal system leaks—blocked (see graphic on page 32)	Check leakage bores for free passage, replace shaft seals on pump and power frame
Front Support has seized on Rotor	O-ring in the front bearing missing or worn	Install or replace O-ring
	Front bearing wrongly installed	Examine front bearing for damage and install in correct position
Product is leaking from the bearing housing openings	Sealing system in the pump is leaking	Inspect and if necessary replace the sealing system and clean the rinsing channels in the power frame
Pump assembly subject to vibrations	Speed of the drive motor is too high	Lower the speed of the drive motor
Smells and smoke coming from the pump	Pump is running dry	Stop the pump immediately. Check inner parts for damage and replace if necessary
Corrosion	Corrosion occurs	Eliminate corrosion; lacquer or use spray oil

SPS 200  
SPS 250  
SPS 300  
SPS 400  
SPS 500  
pumps


## 21 Adjusting the shaft

It is important that dimension X is correct to achieve efficient pumping.

**Note:** Dimension X in all pumps may be measured as below. However, the structure of the SPS 100 pump casing is different from other models (and not as shown here) and SPS 100 dimension X is adjusted differently. SPS 100 pumps must be returned to MasoSine for dimension X adjustment.

SPS 200  
SPS 300  
SPS 400  
pumps

### 21.1 Adjusting dimension X in models with cast power frame

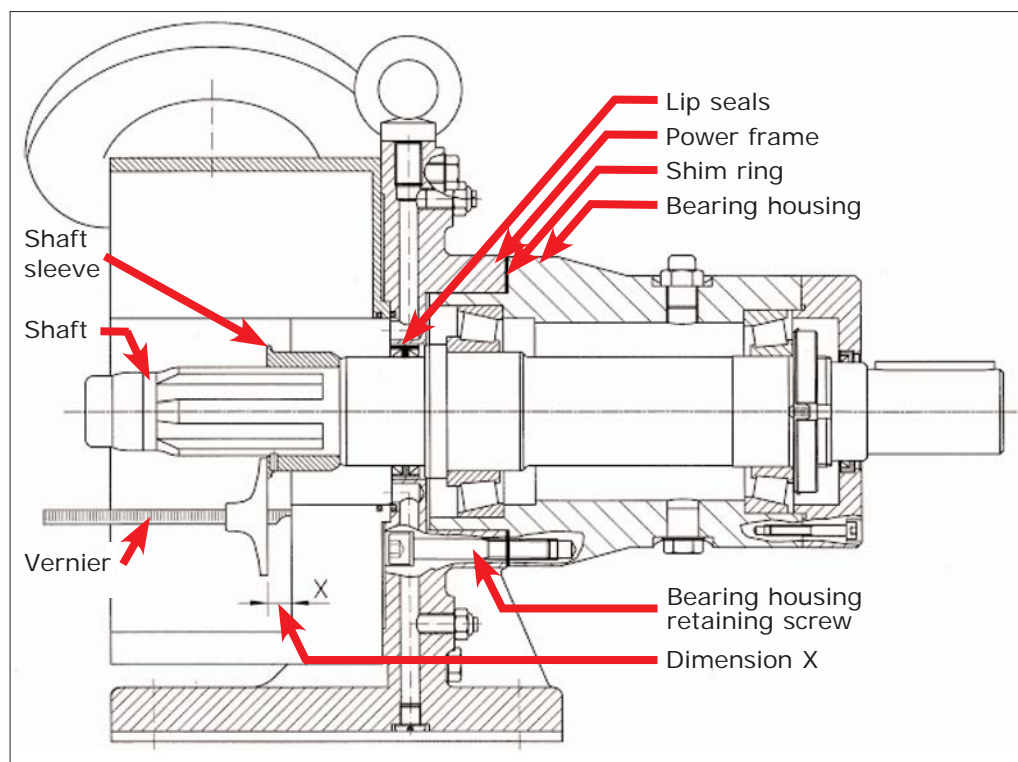





Dimension X			
SPS 100	SPS 200	SPS 300	SPS 400
10.0mm +0.05	17.5mm +0.1	23.0mm +0.1	15.0mm +0.1

#### SPS 200, SPS 300 and SPS 400: adjusting dimension X

**Note:** SPS 100 pumps must be returned to MasoSine for dimension X adjustment.

- Remove the front cover, the front support, the front liner, the rotor, the gate and the gate guide. See 22 *Dismantling and assembly*.
- Measure dimension X.
- Check this dimension against the table above.


SPS 200,  
SPS 300,  
SPS 400 pumps

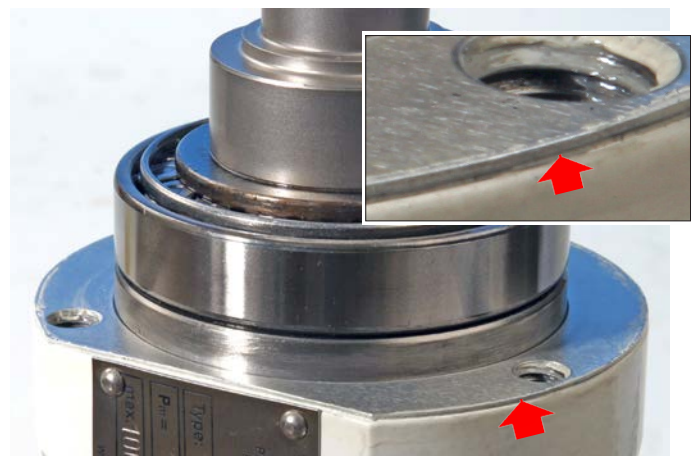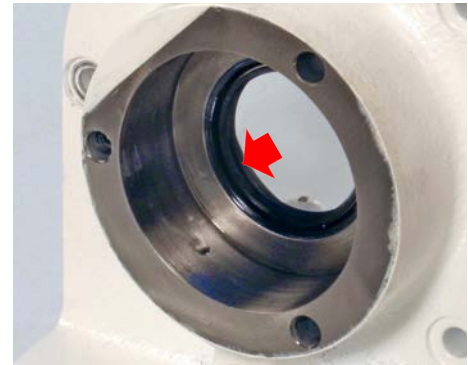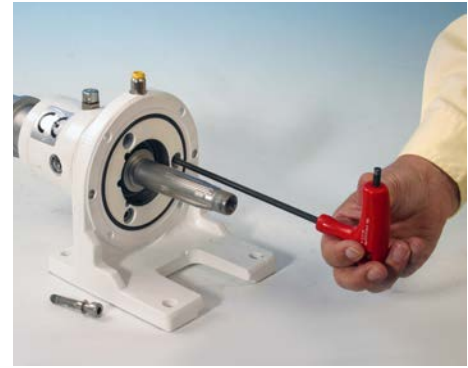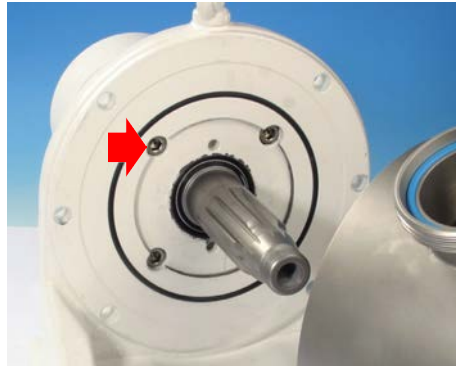

- If this dimension is not correct, continue disassembly (see 22 *Dismantling and assembly*) until the face of the power frame is accessible (the SPS 300 and the SPS 200 pumps are shown here; the SPS 400 is similar).
- Use a 6mm Allen key to loosen and remove the bearing housing retaining screws and copper washers (arrowed; the number of screws varies with pump model.)
- Remove the bearing housing and the pump shaft, being careful not to damage the lip seals (arrowed). **Note:** lubricating oil will spill out as the bearing housing is removed.
- Remove the shim ring (arrowed in the three lower pictures) and install a new one. Reassemble, tightening the bearing housing retaining screws to 25Nm (SPS 200) 50Nm (SPS 300) 35Nm (SPS 400), and measure dimension X again.
- If this dimension is not correct (see table), disassemble and peel layers from the shim ring equal in total thickness to the difference between the re-measured distance and the correct distance, so that the correct dimension X is achieved. One layer is 0.05mm thick.
- Reassemble.

SPS 200  
SPS 250  
SPS 300  
SPS 400  
SPS 500  
pumps

## 21.2 Adjusting dimension X in models with stainless steel power frame

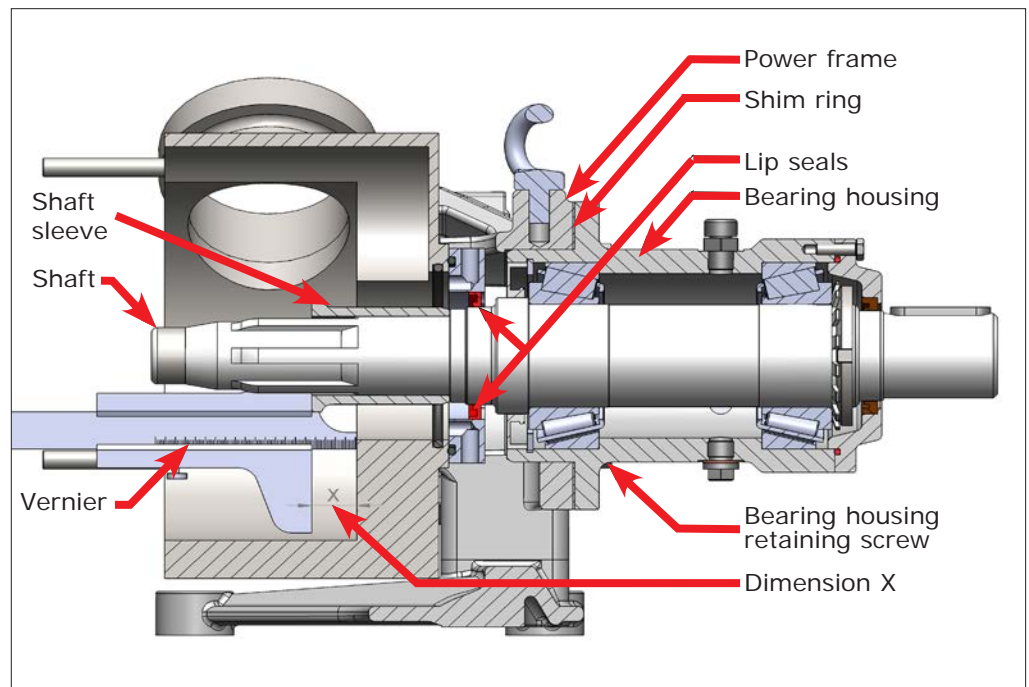

Dimension X					
SPS 100	SPS 200	SPS 250	SPS 300	SPS 400	SPS 500
10.0mm +0.05	17.5mm +0.1	17.4mm +0.1	23.0mm +0.1	15.0mm +0.1	25.4mm +0.1

### SPS 200, SPS 250, SPS 300, SPS 400 and SPS 500: adjusting dimension X

**Note:** SPS 100 pumps must be returned to MasoSine for dimension X adjustment.

- Remove the front cover, the front support, the front liner, the rotor, the gate and the gate guide. See 22 *Dismantling and assembly*.
- Measure dimension X.
- Check this dimension against the table above.






Picture 1



Picture 2

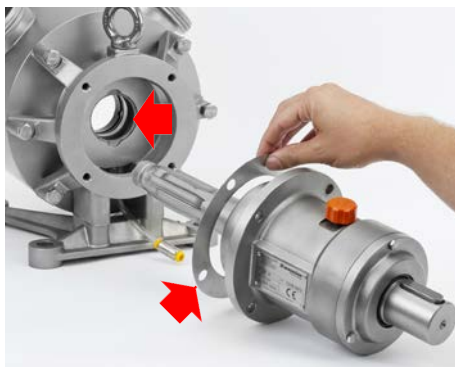

Picture 3

- If this dimension is not correct, use a wrench to loosen and remove the screws securing the bearing housing to the power frame (arrowed; the number of screws varies with pump model). (Picture 1).
  - For SPS 200: 13mm wrench
  - For SPS 250: 13mm wrench
  - For SPS 300: 16mm wrench
  - For SPS 400: 18mm wrench
  - For SPS 500: 18mm wrench
- Remove the bearing housing and the pump shaft, being careful not to damage lip seals (arrowed). (Picture 2).
- Remove the shim ring (arrowed) and install a new one between the power frame and the bearing housing. (Picture 3) Reassemble, tightening the bearing housing retaining screws as follows:
  - For SPS 200 M8: 16 Nm
  - For SPS 250 M8: 16 Nm
  - For SPS 300 M10: 33 Nm
  - For SPS 400 M12: 56 Nm
  - For SPS 500 M12: 56 Nm
 and measure dimension X again.
- If this dimension is not correct (see table), disassemble and peel layers from the shim ring equal in total thickness to the difference between the re-measured distance and the correct distance, so that the correct dimension X is achieved. One layer is 0.05mm thick.
- Reassemble.

## 22 Dismantling and assembly

Note: The colour of plastic parts can vary from those shown in the pictures.

### 22.1 Dismantling all models



Disconnect the pump from the mains power, and secure it against unintentional start-up.

#### Removing the static flushing device (if supplied)

See 25.4 *Parts: static flushing device*

The flushing device must be emptied and removed before dismantling the pump.  
See 23 *The static flushing device*.

SPS 100 pumps

### 22.2 Dismantling and assembling the SPS 100

#### 22.2.1 Dismantling the SPS 100

##### Removing the front cover



- Use a 22mm spanner to remove the cap nuts (**right-hand thread**) and washers.
- Lightly tap the two front cover pins if necessary and use them to pull off the cover.
- You can now access the front cover O-ring (arrowed in the first picture on the next page) in its groove in the front cover.



## SPS 100 pumps

### Removing the locking nut



It is important to ensure that the shaft cannot rotate while the shaft nut is removed. If necessary, it may conveniently be secured using a well-padded wrench on the shaft and the key or keyway. A blocking tool for the shaft is optionally available for easy opening of the locking screw: (SPS 100: TL-SP10-010-31).

- Use a 17mm spanner to remove the locking nut from the end of the shaft (**right-hand thread**).



The locking nut

## Removing the front liner and the front bushing




- Pull the front liner to remove it.

**Note:** You may find it convenient to turn the pump shaft and rotor a little to create space for your fingertips to grasp the top of the front liner.


- Remove the front bushing.
- You can now access the rotor front O-ring (arrowed) in its groove in the rotor front.



## Removing the rotor, the gate and the gate guide

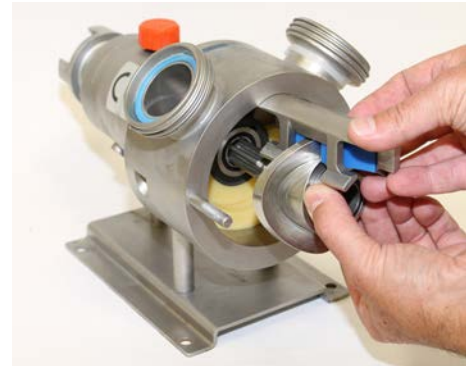

- Note the orientation of the gate and the gate guide so that they can be refitted in the same orientation. This is important because if the gate guide is refitted in the wrong orientation the pump will not work properly and the gate guide can be damaged. Use two hands to remove the rotor, the gate and the gate guide together.

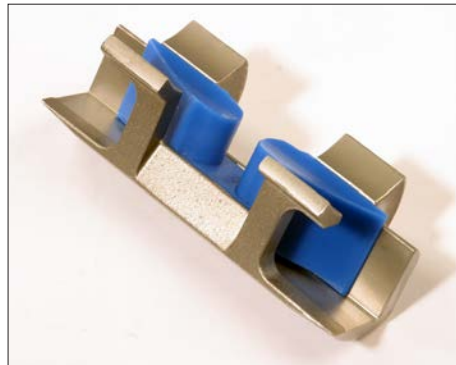

The gate and gate guide shown inverted to make clear the gate's position within the guide for counter-clockwise rotor rotation

## SPS 100 pumps

### Removing the rear liner



- Pull the rear liner to remove it.

## SPS 100 pumps with a single mechanical seal

### Removing the mechanical seal and the static face



- Remove the mechanical seal. You can now access the mechanical seal O-rings.
- Remove the static face. You can now access the static face O-ring. **Note:** If the static face cannot be removed by hand, it can be removed with the sealing system (see *Removing the sealing system*).



The static face with its O-ring, left, the mechanical seal with one of its O-rings visible and the back bushing

**SPS 100 pumps  
with a triple lip  
seal**

**Removing the distance piece and the back bushing**



- Remove the distance piece. You can now access the distance piece O-ring.
- Remove the back bushing.



The distance piece



The front and back bushing.  
They are identical





## Removing the sealing system

**Note:** If your SPS 100 pump is fitted with a static flushing system, this must be removed before removing the sealing system. See 23 *The static flushing device*.



- Use the special tools supplied with the pump to remove the seal housing.
- Position the pointed ends of the special tools to apply leverage to opposite sides of the seal housing at once: first, to the castellations of the seal housing; then to the end of the seal housing.

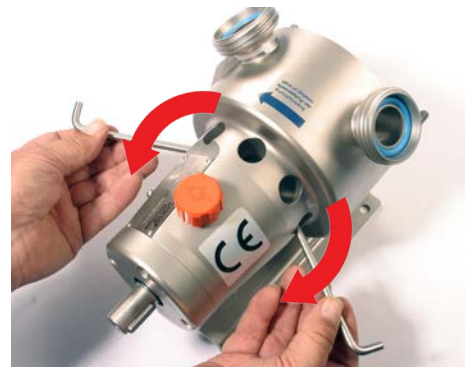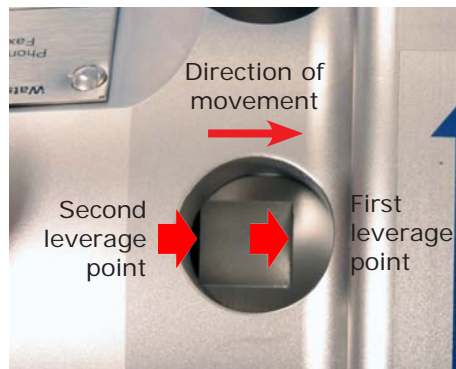

## SPS 100 pumps



- Reverse the special tools and use the angled ends in the same way to apply further leverage to the end of the seal housing, until it is accessible within the pump chamber. Remove it.



The two versions of the SPS 100 pump seal housing: left, where no static flushing system is fitted; right, where a static flushing system is fitted

### Disassembling the seals

- Graphics making clear how to disassemble and assemble the seals appear in section 25.2.

## 22.2.2 Assembling the SPS 100

During assembly, check that all O-rings are properly positioned before fitting each component, and that all components are clean and lubricated.

### Fitting the seal housing



The two versions of the SPS 100 pump seal housing: left, where no static flushing system is fitted; right, where a static flushing system is fitted



- Push the reassembled seal housing into position, castellations first. Make sure it is pressed all the way home. This can be done using the special tools as pushers, or using a special cylindrical tool which is available from MasoSine.  
**Note:** If a static flushing device is to be fitted, align the threaded sockets on both sides of the seal housing vertically, so they are central to the top hole in the bearing housing. See 23 *The static flushing device*.




**SPS 100 pumps  
with a single  
mechanical seal**

### Fitting the static face and the mechanical seal


- Check that the static face's O-ring is properly positioned and that the O-rings either side of the mechanical seal are properly positioned.



The static face with its O-ring, left, and the mechanical seal with one of its O-rings visible. The surfaces of the two components seen here must come together on reassembly. The back bushing is seen, right

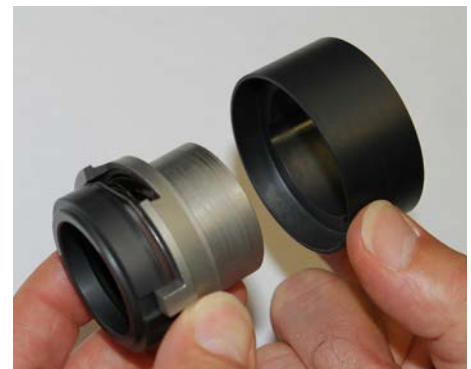

- Position the static face in the mechanical seal, with the static face's O-ring facing the mechanical seal. The static face has two recesses (arrowed) which must be correctly aligned with lugs (arrowed) either side of its seat

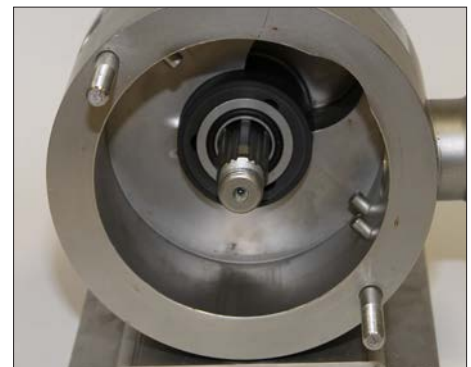

- Use a finger to retain the static face in position on the mechanical seal and push them on to the pump shaft and all the way home into the pump housing.  
**Note:** The mechanical seal has a lug on its inner surface which must be aligned with the shaft splines.

**SPS 100 pumps  
with a triple lip  
seal**

**Pumps with a triple lip seal: fitting the distance piece**



- Check that the distance piece O-ring is in position.
- Push the distance piece into position, flanged end first.


**Pumps with a triple lip seal: fitting the back bushing**



- Push the back bushing into position, thick end (arrowed) towards the front. (The two bushings are identical.)


**SPS 100 pumps**

**Fitting the rear liner**

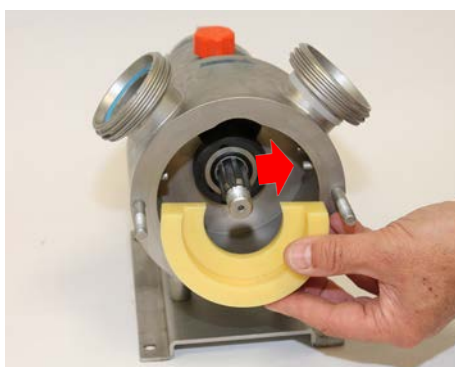

- Push the rear liner into position, pushing evenly at both ends so that it does not jam. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.


## Fitting the rotor, the gate and the gate guide

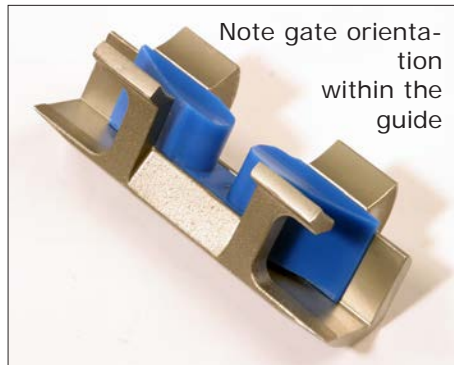


The gate and gate guide inverted to show the gate's position within the guide for counter-clockwise rotor rotation



The rotor

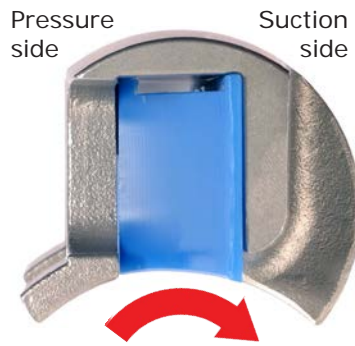

The gate and gate guide oriented for clockwise rotor rotation

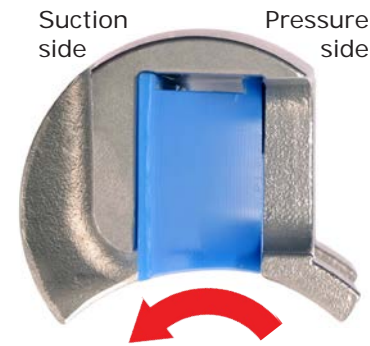


The gate and gate guide oriented for counter-clockwise rotor rotation

- Check that the rotor O-ring is in position.
- Position the gate within the gate guide and hold as one unit.



**Check that the gate and gate guide are correctly oriented for the desired sense of rotor rotation. This is critical for proper operation.**

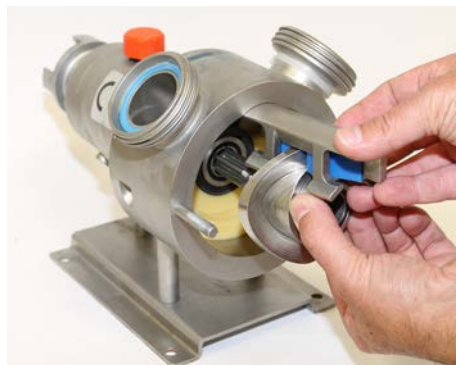

- Hold the rotor vane in the slot of the gate, with the larger diameter end of the rotor bush away from you. Position the rotor, the gate and the gate guide together. Push the assembly into position. The gate and gate guide slide freely into their channel; the splines within the rotor hub must be aligned with the shaft splines.
- Ensure that the rotor is pushed all the way home.

## Fitting the front bushing and the front liner



- Push the front bushing into position, thick end (arrowed) first. (The two bushings are identical.) **Note:** Pumps are fitted with identical front and rear bushings.
- Push the front liner into position, pushing evenly at both ends so that it does not jam. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.



### Fitting the locking nut



It is important to ensure that the shaft cannot rotate while the shaft nut is fitted. If necessary, it may conveniently be secured using a well-padded wrench on the shaft and the key or keyway. A blocking tool for the shaft is optionally available for easy opening of the locking screw: (SPS 100: TL-SP10-010-31).

- Use a 17mm spanner to tighten the locking nut to 100Nm (**right-hand thread**).

### Fitting the front cover



- Check that the front cover O-ring (arrowed above) is in its groove in the front cover.
- Fit the front cover over the shaft and the pump housing studs.
- Fit the cap nuts (**right-hand thread**) and washers to the pump housing studs. Use a 22mm spanner. Tighten them to 35Nm.

## 22.3 Dismantling and assembling the SPS 200

### 22.3.1 Dismantling the SPS 200

**Note:** The pictures show a pump with a cast iron power frame. Dismantling models with stainless steel power frame is similar. For exceptions, see page 62.

#### Removing the front cover



- Use a 22mm spanner to remove the cap nuts (**right-hand thread**) and washers.
- Lightly tap the two front cover pins if necessary and use them to pull off the cover.

#### Removing the front support, PEEK or stainless steel





The PEEK front support



The stainless steel front support

## SPS 200 pumps

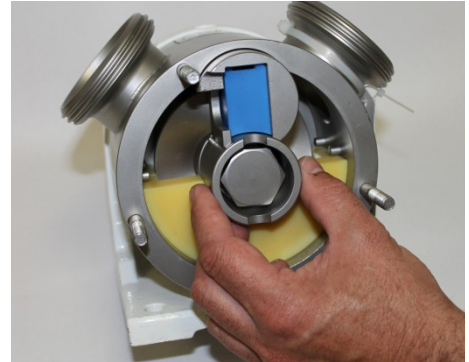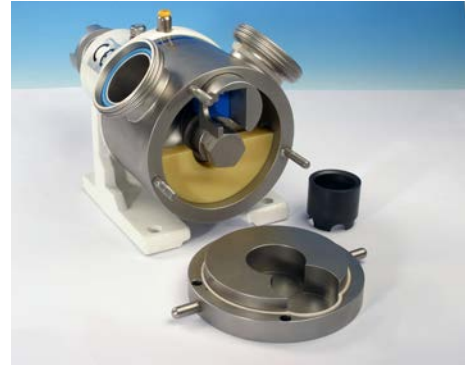


The front support may come off the shaft with the front cover, as pictured (PEEK support: top pictures; stainless steel support: lower pictures), or it may remain on the shaft. **Note:** the PEEK front support is breakable.

- Remove the front support.

You can now access the front cover O-ring (arrowed) in its groove in the front cover.

### Removing the front liner

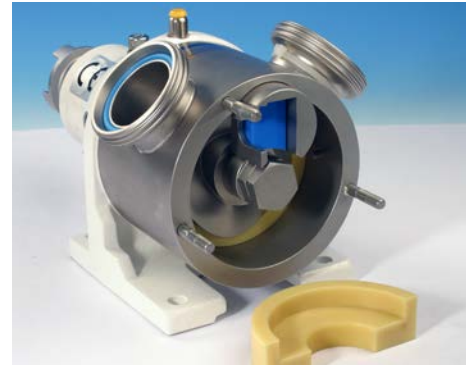

- Pull the front liner to remove it.

**Note:** You may find it convenient to turn the pump shaft and rotor a little to create space for your fingertips to grasp the top of the front liner.

### Removing the shaft locking screw



It is important to ensure that the shaft cannot rotate while the shaft locking screw is removed. It may be convenient to secure it using a tommy bar or a spanner handle between the spider castellations on the drive shaft. Alternatively, a well-padded wrench can be used on the shaft and the key or keyway. A blocking tool for the shaft is optionally available for easy opening of the locking screw: (SPS 200: TL-SP20-010-31).


- Use a 32mm ring spanner to remove the locking screw from the end of the shaft (**left-hand thread**).
- You can now access the shaft nut O-ring in its groove in the shaft nut.



The shaft locking screw



## Removing the shaft nut

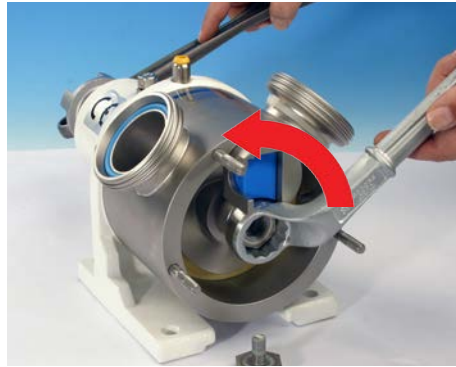

It is important to ensure that the shaft cannot rotate while the shaft nut is removed. If the motor is fitted to the pump, its torque should be enough to secure the shaft. If it is not secure, uncouple the pump from the motor and secure the shaft using a tommy bar or a spanner handle between the spider castellations on the drive shaft. Alternatively, a well-padded wrench can be used on the shaft and the key or keyway.

- Use a 32mm ring spanner to remove the shaft nut from the end of the shaft **(right-hand thread)**.
- You can now access the rotor front O-ring (arrowed) in its groove in the rotor front.




The shaft nut

## SPS 200 pumps

### Removing the rotor, the gate and the gate guide



- Note the orientation of the gate and the gate guide so that they can be refitted in the same orientation. Use two hands to remove the rotor, the gate and the gate guide together.
- You can now access the rotor rear O-ring in its groove in the rotor rear.

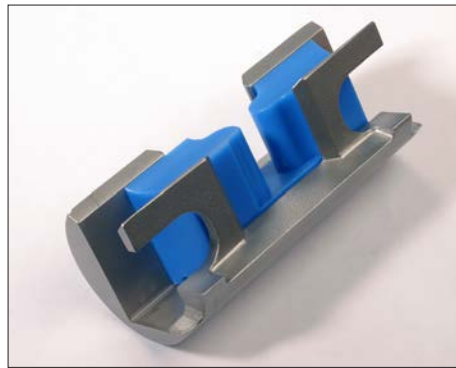

The gate and gate guide

**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a single mechanical seal: removing the rear liner and  
the backing ring**



- Pull the rear liner to remove it.
- The backing ring may remain on the shaft or it may come off the shaft with the rear liner.
- Remove the backing ring.



The backing ring

**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a single mechanical seal: removing the dynamic ring holder**



- Pull the dynamic ring holder to remove it.



The dynamic ring holder

**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a cast iron power frame and a single mechanical seal:  
dismantling the pump housing**

**Note:** See page 62 for dismantling the pump housing of a pump with a stainless steel power frame.



- Use a 13mm spanner to loosen and remove the two screws (**right-hand thread**) and washers which secure the pump housing to the power frame.
- If necessary, gently tap the pump housing with a soft hammer to free it. Withdraw the pump housing carefully.

**Note:** the pump housing is heavy.

## SPS 200 pumps with a single mechanical seal

### Pumps with a single mechanical seal: removing the seal and the static face



- Remove the mechanical seal from the rear of the pump housing.
  - Remove the static face from the mechanical seal.
  - You can now access the seal housing O-ring in its groove in the pump housing (arrowed above), and the two O-rings in the mechanical seal (arrowed below).
- Note:** The mechanical seal is a tight push fit.



The static face



The mechanical seal



### Pumps with a single mechanical seal: fitting the seal

- A graphic making clear how to disassemble and assemble the seal appears in section 25.2.



**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a triple lip seal seal: removing the rear liner**



- Pull the rear liner to remove it.

**Pumps with a triple lip seal: removing the sealing system**



- Pull the seal housing fitted with the shaft sleeve to remove it.



- Remove the shaft sleeve from the seal housing.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a triple lip seal: removing the pump housing**




- Use a 13mm spanner to loosen and remove the two screws (**right-hand thread**) and washers which secure the pump housing to the power frame.
- If necessary, gently tap the pump housing with a soft hammer to free it. Withdraw the pump housing carefully.

**Note:** the pump housing is heavy.



**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a triple lip seal: removing the distance ring**

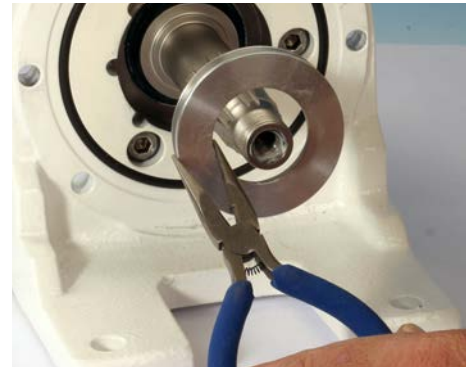

- The distance ring is a loose fit in its channel on the face of the power frame. Use a tool such as a pair of long-nose pliers to grasp the distance ring where recesses have been machined in the face of the power frame and withdraw it.



The distance ring

**Pumps with a triple lip seal: fitting the seals**

- A graphic making clear how to disassemble and assemble the seal appears in section 25.2.

**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a stainless steel power frame and a single mechanical seal: dismantling the pump housing**

**Note:** See page 57 for dismantling the pump housing of a pump with a cast iron power frame.



- Use a 13mm spanner to loosen and remove the six screws (**right-hand thread**) and washers which secure the pump housing to the power frame.
- If necessary, gently tap the pump housing with a soft hammer to free it. Withdraw the pump housing carefully.  
**Note:** the pump housing is heavy.
- Pull off the flush ring. Whichever flush ring is installed, the procedure is the same.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a stainless steel power frame and a triple lip seal: dismantling the pump housing**



- Remove the distance ring from the flush ring.

## 22.3.2 Assembling the SPS 200

**Note:** The pictures show a pump with a cast iron power frame. Assembly of models with stainless steel power frame is similar. For exceptions, see page 69.

During assembly, check that all O-rings are properly positioned before fitting each component, and that all components are clean and lubricated.

**SPS 200 pumps with a single mechanical seal**

### Pumps with a single mechanical seal: fitting the static face and the seal



The mechanical seal



The static face

- Check that the seal housing O-ring is properly positioned in its groove in the pump housing (arrowed in bottom left picture), and that the two O-rings either side of the mechanical seal are properly positioned (arrowed above).




- Position the static face in the mechanical seal. The static face has two recesses (arrowed) which must be correctly aligned with lugs (arrowed) either side of its seat.



- Push the mechanical seal into the pump housing.  
**Note:** The mechanical seal is a tight push fit.

**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a cast iron frame and a single mechanical seal: fitting  
the pump housing**

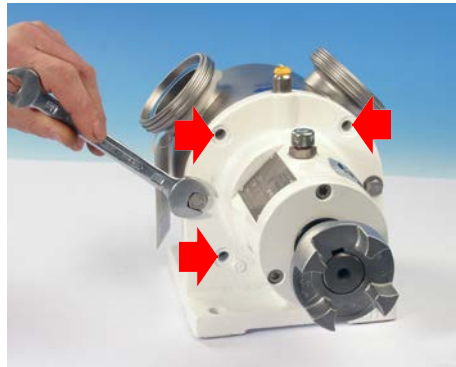

- Pass the pump housing, complete with mechanical seal and static face, over the shaft and position on the face of the power frame.  
**Note:** The pump housing may be positioned in three orientations. See *13 Possible pump orientations*.  
**Note:** the pump housing is heavy.
- Fit the two 13mm screws (**right-hand thread**) and washers which secure the pump housing to the power frame. 10-2 assembly is shown here. Alternative screw positions (three of four arrowed) allow the pump housing to be positioned at 9-12 or 12-3 orientations. Tighten to 35Nm.

**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a single mechanical seal: fitting the dynamic ring holder**



The dynamic ring holder



- Push the dynamic ring holder over the pump shaft, narrow end first. The dynamic ring holder has an alignment lug inside it which must be aligned with the shaft splines.



**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a single mechanical seal: fitting the backing ring and the rear liner**



The backing ring




- Push the backing ring over the pump shaft and over the dynamic ring holder. The backing ring is reversible.




- Push the rear liner into position below the backing ring. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a triple lip seal: fitting the distance ring**

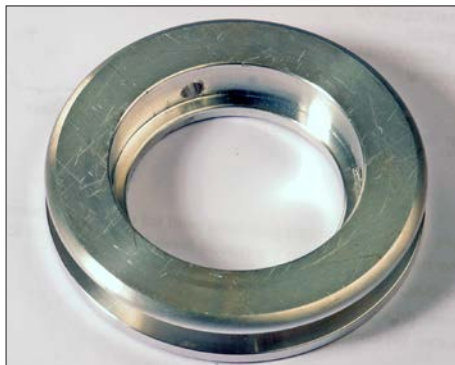



The distance ring with radiused edge up

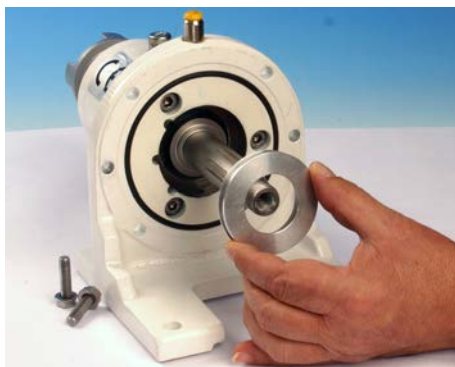

- The distance ring is a loose fit in its channel on the face of the power frame. Position it with the radiused edge facing the power frame.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a cast iron frame and a triple lip seal: fitting the pump housing**

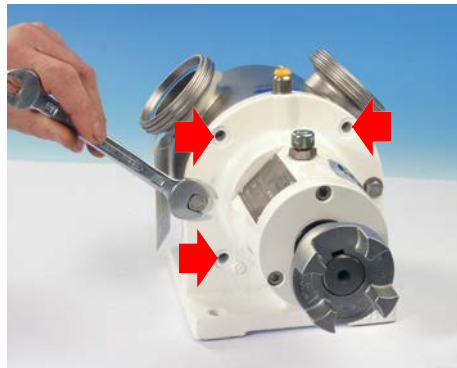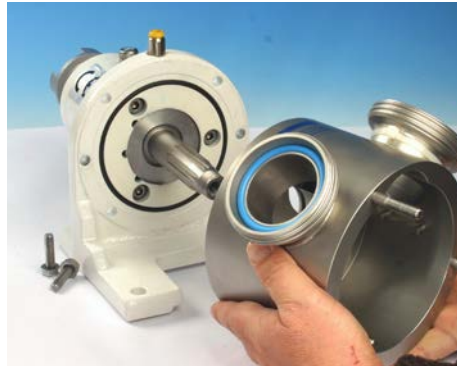

- Check that the seal housing O-ring is properly positioned in its groove in the rear of the pump housing.
- Pass the pump housing over the shaft and position on the face of the power frame.

**Note:** The pump housing may be positioned in three orientations. See 13 *Possible pump orientations*.

**Note:** the pump housing is heavy.

- Fit the two 13mm screws (**right-hand thread**) and washers which secure the pump housing to the power frame. 10-2 assembly is shown here. Alternative screw positions (three of four arrowed) allow the pump housing to be positioned at 9-12 or 12-3 orientations. Tighten to 35Nm.



**SPS 200 pumps  
with a single  
mechanical seal**

**Pumps with a stainless steel power frame: assembling the pump housing**

**Note:** See page 64 for assembling the pump housing of a pump with a cast iron power frame.



- Fit the flush ring. Whichever flush ring is installed, the procedure is the same. For single mechanical seal system the distance ring is not needed.
- Position the pump housing carefully.  
**Note:** the pump housing is heavy.
- Use a 13mm spanner to fit and tighten the screws (**right-hand thread**) and washers which secure the pump housing to the power frame.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a stainless steel power frame and a triple lip seal:  
assembling the distance ring**



- Fit the distance ring into the flush ring before fitting the flush ring.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a cast iron power frame and a triple lip seal: fitting the sealing system**



- Push the seal housing into the shaft sleeve.



- Push the shaft sleeve fitted with the seal housing over the shaft and into position, the chamfered, lip-seal end of the shaft sleeve first. The shaft sleeve is a tight push fit. Be sure to push it all the way home. The shaft sleeve has an alignment lug inside it which must be aligned with the shaft splines.

**Pumps with a triple lip seal: fitting the rear liner**





- Push the rear liner into position below the shaft sleeve, pushing evenly at both ends so that it does not jam. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.

**SPS 200 pumps  
with a triple lip  
seal**

**Pumps with a stainless steel seal housing for a triple lip seal:  
fitting the sealing system**



- Push the shaft sleeve into the seal housing (with the lip seals)

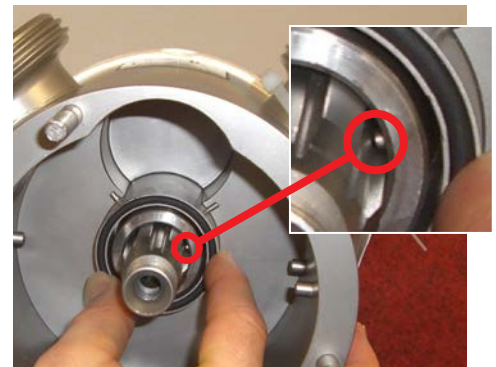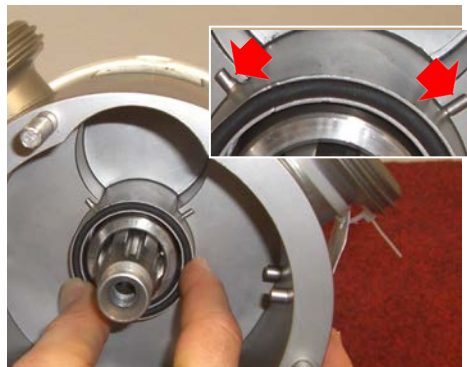

- Push the shaft sleeve fitted with the seal housing over the shaft and into position, the chamfered, lip-seal end of the shaft sleeve first. The seal housing's pins (arrowed) must be upward and central. The shaft sleeve is a tight push fit. Be sure to push it all the way home. The shaft sleeve has an alignment lug inside it (ringed) which must be aligned with the shaft splines.


**Pumps with a triple lip seal: fitting the rear liner**



- Push the rear liner into position below the shaft sleeve, pushing evenly at both ends so that it does not jam. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.




## Fitting the rotor, the gate and the gate guide

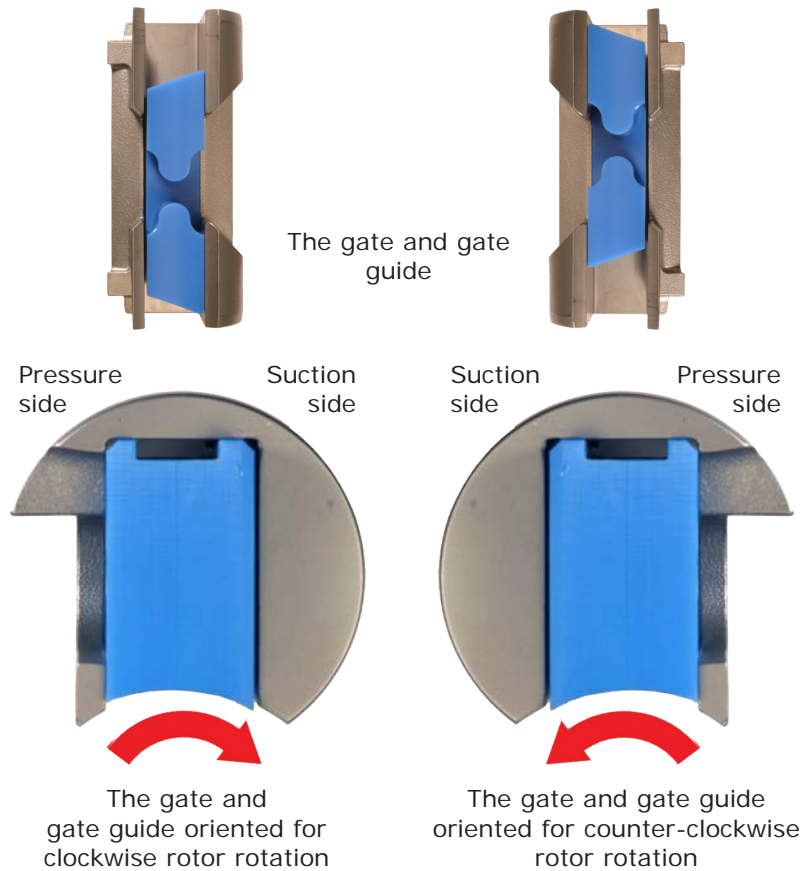

- Check that the two rotor O-rings (visible one arrowed) are in position on both sides of the rotor.
- Position the gate within the gate guide and hold as one unit.



**Check that the gate and gate guide are correctly oriented for the desired sense of rotor rotation. This is critical for proper operation.**

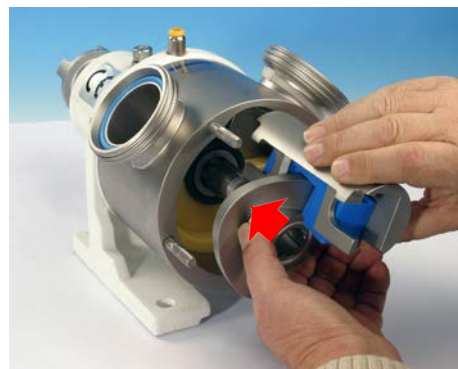

- Hold the rotor vane in the slot of the gate. Use two hands to position the rotor, the gate and the gate guide together. The rotor is reversible. Push the assembly into position. The gate and gate guide slide freely into their channel; the splines within the rotor hub must be aligned with the shaft splines.
- Ensure that the rotor is pushed all the way home.

### Fitting the shaft nut



The shaft nut



It is important to ensure that the shaft cannot rotate while the shaft nut is fitted. It may conveniently be secured using a tommy bar or a spanner handle between the spider castellations on the drive shaft. Alternatively, a well-padded wrench can be used on the shaft and the key or keyway. A blocking tool for the shaft is optionally available for easy opening of the locking screw (SPS 200: TL-SP20-010-31).

- Check that the shaft nut O-ring (arrowed) is in position on the shaft nut.
- Fit the shaft nut (right-hand thread) over the shaft. Use a 32mm ring spanner to tighten it to 65Nm.

### Fitting the shaft locking screw




The shaft locking screw



It is important to ensure that the shaft cannot rotate while the shaft locking screw is fitted. It may conveniently be secured using a tommy bar or a spanner handle between the spider castellations on the drive shaft. Alternatively, a well-padded wrench can be used on the shaft and the key or keyway.

- Fit the shaft locking screw (left-hand thread) to the shaft. Use a 32mm ring to tighten it to 45Nm.

### Fitting the front liner

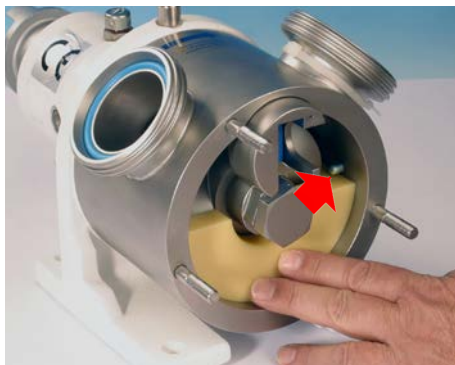

- Push the front liner into position, pushing evenly at both ends so that it does not jam. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.

### Fitting the front support



The PEEK front support



- Position the PEEK front support, castellations first, in its recess in the front cover (the side with slots must face the front cover).
- Check that the front cover O-ring (arrowed) is in its groove in the front cover.



Stainless steel front support



## SPS 200 pumps

### Fitting the front cover



- Check that the front cover O-ring (arrowed on previous page) is in its groove in the front cover.
- Fit the front cover, complete with the front support, over the shaft and the pump housing studs.
- Fit the cap nuts (**right-hand thread**) and washers to the pump housing studs. Use a 22mm spanner. Tighten them to 35Nm.



SPS 250, SPS 300, SPS 400 and SPS 500 pumps

## 22.4 Dismantling and assembling the SPS 250, SPS 300, SPS 400 and SPS 500

SPS 250, SPS 300, SPS 400 and SPS 500 pumps

### 22.4.1 Dismantling the SPS 250 SPS 300 SPS 400 and SPS 500

**Note:** The SPS 250, SPS 400 and the SPS 500 are similar.

**Note:** The pictures show a pump with a cast iron power frame. Dismantling models with stainless steel power frame is similar. For exceptions, see page 83.

#### Removing the front cover



- Use a 22mm spanner to remove the cap nuts (**right-hand thread**) and washers.
- Lightly tap the two front cover pins if necessary and use them to pull off the cover.


**Note:** The cover is heavy.



- You can now access the front cover O-ring (arrowed) in its groove in the front cover.

SPS 250, SPS 300, SPS 400 and SPS 500 pumps


### Removing the front liner

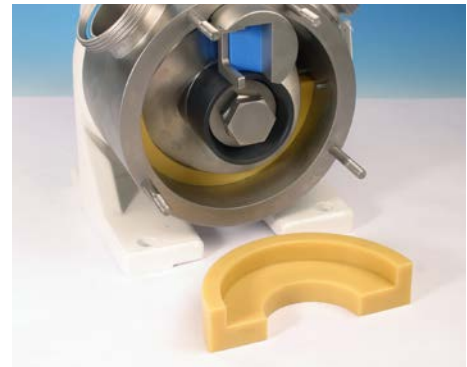

- Pull the front liner to remove it.


**Note:** You may find it convenient to turn the pump shaft and rotor a little to create space for your fingertips to grasp the top of the front liner.

### Removing the shaft locking screw and the shaft nut

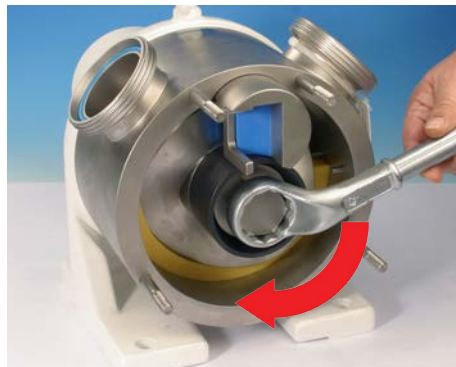

It is important to ensure that the shaft cannot rotate while the shaft locking screw and the shaft nut are removed. It may be convenient to secure it using a well-padded wrench on the shaft and the key or keyway. A blocking tool for the shaft is optionally available for easy opening of the locking screw SPS 250: TL-SP21-010-31, SPS 300: TL-SP25-010-31, SPS 400: TL-SP40-010-31 and SPS 500: TL-SP50-010-31)

- Use ring spanner to remove the locking screw from the shaft (**left-hand thread**).
- Use ring spanner to remove the shaft nut from the shaft (**right-hand thread**). It will leave the shaft with the front support.
- You can now access the rotor front O-ring (arrowed) in its groove in the rotor front.

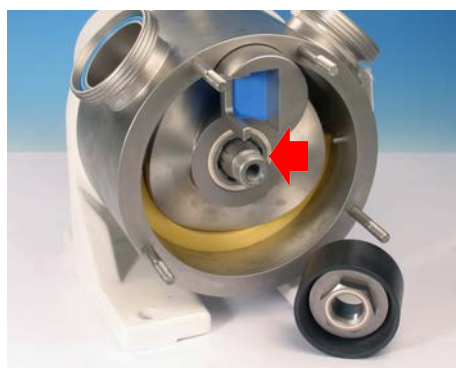

SPS 250, SPS  
300, SPS 400  
and SPS 500  
pumps



- Remove the shaft nut from the PEEK front support. **Note:** the PEEK front support is breakable.
- You can now access the shaft nut O-ring (arrowed) in its groove in the shaft nut.



The locking screw



The shaft nut



The front support

**SPS 250, SPS  
300, SPS 400  
and SPS 500  
pumps**

### **Removing the rotor, the gate and the gate guide**



- Note the orientation of the gate and the gate guide so that they can be refitted in the same orientation. Use two hands to remove the rotor, the gate and the gate guide together.
- You can now access the rotor rear O-ring in its groove in the rotor rear.

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal**

**Pumps with a single mechanical seal: removing the rear liner and the backing ring**



- Pull the rear liner to remove it.
- Remove the backing ring.



The backing ring

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal**

**Pumps with a single mechanical seal: removing the dynamic ring holder**



- Pull the dynamic ring holder to remove it.



The dynamic ring holder



SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal

## Pumps with a single mechanical seal: removing the pump housing



- Guide the optional special cylindrical tool (arrowed: TL-SP21-002-50, TL-SP25-002-50, TL-SP40-002-50 or TL-SP50-002-50 - available to order) over the shaft and push it home. This will give some protection to the shaft splines as the pump housing is removed. It is important not to damage the shaft while removing or installing the pump housing.
- Use a 17mm spanner to loosen and remove the two screws (**right-hand thread**) and washers which secure the pump housing to the power frame.
- If necessary, gently tap the pump housing with a soft hammer to free it. Withdraw the pump housing carefully.  
**Note:** the pump housing is heavy.



SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal

### Pumps with a single mechanical seal: removing the seal and the static face



- Push the mechanical seal from the rear of the pump housing and remove it.  
**Note:** The mechanical seal is a tight push fit.
- Remove the static face from the mechanical seal.
- You can now access the seal housing O-ring in its groove in the pump housing (arrowed), and the O-ring in the mechanical seal (arrowed).



Pump housing O-ring



The static face



The mechanical seal

### Pumps with a single mechanical seal: removing the seal

- A graphic making clear how to disassemble and assemble the seal appears in section 25.1.

SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a triple lip seal

### Pumps with a triple lip seal

See the graphics in section 25.2 and 25.3, and refer to the instructions for the SPS 200 pump triple lip seal disassembly in section 22.3.1. The SPS 250, SPS 300, SPS 400 and SPS 500 are similar.

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal**

## **Pumps with a stainless steel power frame and a single mechanical seal: dismantling the pump housing**

**Note:** See page 81 for dismantling the pump housing of a pump with a cast iron power frame.



- Guide the optional special cylindrical tool (arrowed: TL-SP21-002-50, TL-SP25-002-50, TL-SP40-002-50 or TL-SP50-002-50 - available to order) over the shaft and push it home. This will give some protection to the shaft splines as the pump housing is removed. Otherwise, it is important not to damage the shaft while removing or installing the pump housing.
- Use a 13mm spanner to loosen and remove the screws (**right-hand thread**) and washers which secure the pump housing to the power frame.
- If necessary, gently tap the pump housing with a soft hammer to free it. Withdraw the pump housing carefully.  
**Note:** the pump housing is heavy.
- Pull off the flush ring.

## 22.4.2 Assembling the SPS 250, SPS 300, SPS 400 and SPS 500

During assembly, check that all O-rings are properly positioned before fitting each component, and that all components are clean and lubricated.

**Note:** The SPS 300 model is pictured in this section. The SPS 250, SPS 300, SPS 400 and SPS 500 are similar.

**Note:** The pictures show a pump with a cast iron power frame. Assembly of models with stainless steel power frame is similar. For exceptions, see page 91.

SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal


### Pumps with a single mechanical seal: fitting the pump housing



- Check that the seal housing O-ring is properly positioned in its groove in the pump housing (arrowed in bottom left picture, previous page).
- Guide the optional special cylindrical tool (TL-SP21-002-50, TL-SP25-002-50, TL-SP40-002-50 or TL-SP50-002-50 - available to order) over the shaft and push it home. Push the front support locking screw (arrowed) through the end hole of the special tool and into the female thread on the end of the shaft: **left-hand thread**. Otherwise, it is important not to damage the shaft while removing or installing the pump housing. Tighten the locking screw by hand.
- Pass the pump housing over the shaft and the special tool and position it on the face of the power frame.

**Note:** The pump housing may be positioned in three orientations. See 13 *Possible pump orientations*.

**Note:** the pump housing is heavy.

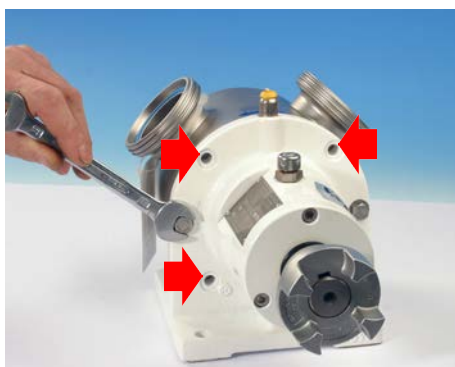

- Fit the two 17mm screws (**right-hand thread**) and washers which secure the pump housing to the power frame. 10-2 assembly is shown here. Alternative screw positions (three of four arrowed) allow the pump housing to be positioned at 9-12 or 12-3 orientations. Tighten to 40Nm. Remove the locking screw and the special tool.

SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal

## Pumps with a single mechanical seal: fitting the static face and the seal



Pump housing O-ring



The static face



The mechanical seal

- Check that the seal housing O-ring is properly positioned in its groove in the pump housing (arrowed), and that the mechanical seal O-ring is properly positioned (arrowed).



- Position the static face in the mechanical seal. The static face has two recesses (arrowed) which must be correctly aligned with lugs (arrowed) either side of its seat.



- Push the mechanical seal into the pump housing.  
**Note:** The mechanical seal is a tight push fit.

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal**

### **Pumps with a single mechanical seal: fitting the dynamic ring holder**



The dynamic ring holder



- Push the dynamic ring holder over the pump shaft, narrow end first. The dynamic ring holder has alignment lugs inside it which must be aligned with the shaft splines.



**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal**

### **Pumps with a single mechanical seal: fitting the backing ring and the rear liner**



The backing ring



- Push the backing ring over the pump shaft and over the dynamic ring holder. The backing ring is reversible.



- Push the rear liner into position below the backing ring. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.


**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a triple lip seal**

### **Pumps with a triple lip seal**

See the graphics in section 25.1 and 25.3, and refer to the instructions for the SPS 200 pump triple lip seal assembly in section 22.3.2. The SPS 250, SPS 300, SPS 400 and SPS 500 are similar.

SPS 250, SPS 300, SPS 400 and SPS 500 pumps

## Fitting the rotor, the gate and the gate guide

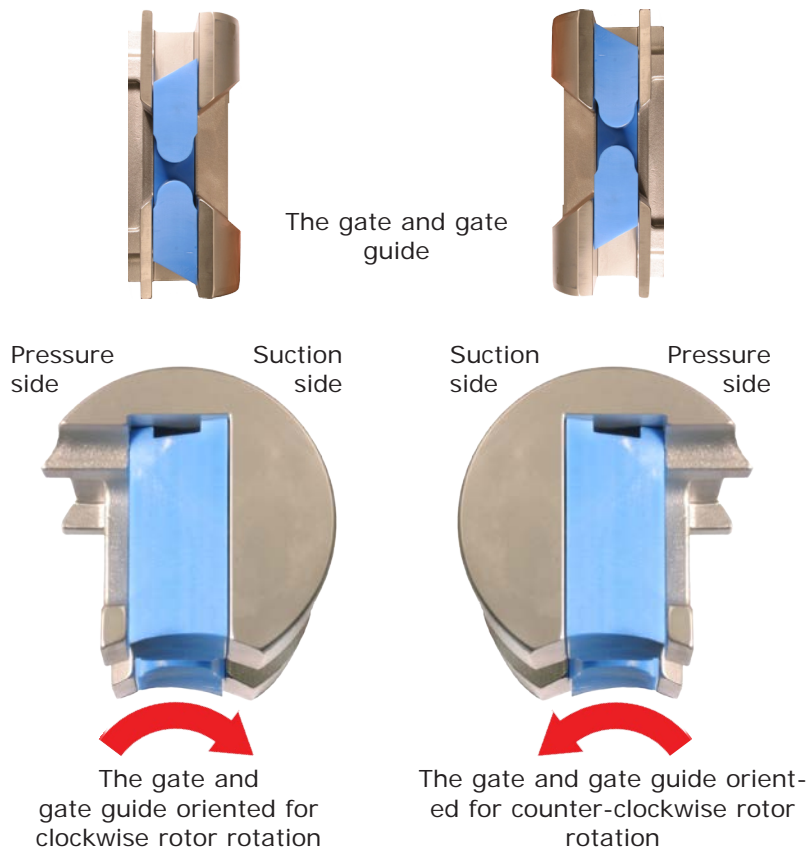

- Check that the two rotor O-rings (visible one arrowed) are in position on both sides of the rotor.
- Position the gate within the gate guide and hold as one unit.



**Check that the gate and gate guide are correctly oriented for the desired sense of rotor rotation. This is critical for proper operation**



- Hold the rotor vane in the slot of the gate. The rotor is reversible. Use two hands to position the rotor, the gate and the gate guide together. Push the assembly into position. The gate and gate guide slide freely into their channel; the splines within the rotor hub must be aligned with the shaft splines.
- Ensure that the rotor is pushed all the way home.



**SPS 250, SPS 300, SPS 400 and SPS 500 pumps**

### Fitting the front support, the shaft nut and locking screw



The PEEK front support

The shaft nut


The shaft locking screw

It is important to ensure that the shaft cannot rotate while the shaft locking screw and the shaft nut are tightened. It may be convenient to secure it using a well-padded wrench on the shaft and the key or keyway. A blocking tool for the shaft is optionally available for easy opening of the locking screw (SPS 250: TL-SP21-010-31, SPS 300: TL-SP25-010-31, SPS 400: TL-SP40-010-31 and SPS 500: TL-SP50-010-31).

- Check that the shaft nut O-ring (arrowed) is in position on the shaft nut.



- Fit the shaft nut into the front support.
- Fit the shaft nut and front support over the shaft.

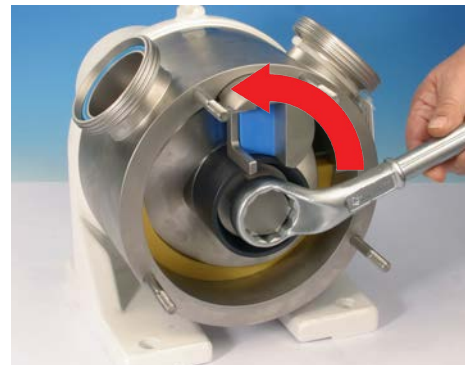

- Use the ring spanner to tighten it (right-hand thread) to 65Nm (SPS 250); 110Nm (SPS 300); 125Nm (SPS 400); 125Nm (SPS 500).
- Fit the shaft locking screw (left-hand thread) to the shaft. Use the ring spanner to tighten it to 45Nm (SPS 250); 95Nm (SPS 300); 105Nm (SPS 400); 105Nm (SPS 500).

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps**

### Fitting the front liner



- Push the front liner into position, pushing evenly at both ends so that it does not jam. The anti-rotation pins within the pump housing (arrowed) guarantee that the liner is properly positioned. The two liners are identical.

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps**

### Fitting the front cover



- Check that the front cover O-ring (arrowed) is in its groove in the front cover.
- Fit the front cover over the shaft, the front support and the pump housing studs.
- Fit the cap nuts (right-hand thread) and washers to the pump housing studs. Use a 22mm spanner. Tighten them to 45Nm (torque for other sizes see page 102-103)

**SPS 250, SPS 300, SPS 400 and SPS 500 pumps with a single mechanical seal**

## **Pumps with a stainless steel power frame and a single mechanical seal: assembling the pump housing**

**Note:** See page 84 for assembling the pump housing of a pump with a cast iron power frame.




- Fit the flush ring.
- Guide the optional special cylindrical tool (arrowed: TL-SP21-002-50, TL-SP25-002-50, TL-SP40-002-50 or TL-SP50-002-50 - available to order) over the shaft and push it home. This will give some protection to the shaft splines as the pump housing is fitted. It is important not to damage the shaft while removing or installing the pump housing.  
**Note:** the pump housing is heavy.
- Use a 13mm spanner to fit and tighten the screws (**right-hand thread**) and washers which secure the pump housing to the power frame.

## 23 The static flushing device

### SPS 100 pumps

#### SPS 100

#### Fitting the static flushing device

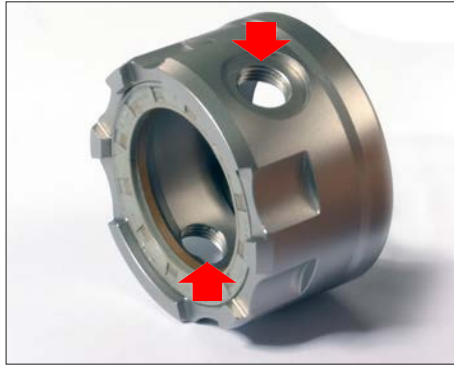

The tapped pump seal housing




The sight glass and the sight glass connection piece



- The static flushing device can be fitted only to a SPS 100 pump with a pump seal housing which is tapped to take it (arrowed). See also 22.2.2 *Assembling the SPS 100*.
- Pass the special L-shaped tool or a screwdriver through the top hole in the bearing housing and use it to rotate the pump seal housing until it is central to the top hole in the bearing housing.
- Fit the sight glass connection piece. Use a 17mm spanner to tighten it.
- Fit the sight glass.




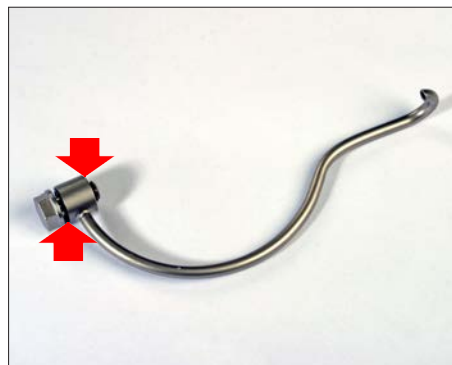

The bent outlet connection piece

The bent outlet

- Use a 17mm spanner to tighten it.
- Use a 13mm spanner to remove the bolts, washers and spacers securing the baseplate. See 13.1 *Changing pump orientation*.
- Check that the O-rings (arrowed) are in place on the bent outlet. Fit the bent outlet connection piece and the bent outlet through the bottom hole in the bearing housing in the same way.
- Refit the baseplate.
- Fill the system with flushing fluid to the level of the top bend of the bent outlet.

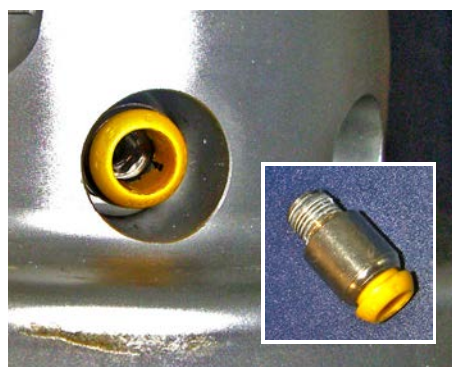

**Note:** Nipples may be fitted in place of the static flushing device if desired. Use a 6mm Allen key to tighten them.

### Removing the static flushing device

**Note:** The flushing device (if fitted) must be emptied and removed before dismantling the pump.

- To remove the static flushing device, pour the flushing fluid from the sight glass, and reverse the sequence of operations described above.

**SPS 200,  
SPS 300 and  
SPS 400 pumps**

**SPS 200, SPS 300 and SPS 400 pumps with cast iron power frame**

The static flushing device for the SPS 300 is shown here. The static flushing devices for the SPS 200 and the SPS 400 are similar.

**Fitting the static flushing device**



- Use a 6mm Allen key to remove the two nipples (arrowed) (if fitted) from the pump's power frame.
- Fit the sight glass connection piece in place of the top nipple. Use a 19mm spanner to tighten it. Fit the sight glass and tighten the retaining nut to hold it in position.
- Fit the bent outlet in place of the bottom nipple in the same way.
- Fill the system with flushing fluid to the level of the top bend of the bent outlet.

## Removing the static flushing device

**Note:** The flushing device (if fitted) must be emptied and removed before dismantling the pump.



- Use a 19mm spanner to loosen the retaining nut holding the bent outlet in position (arrowed) enough to allow the bent outlet to be lowered into a horizontal position.
- Hold a vessel under the bent outlet. Drain until no more liquid runs out of the power frame.
- Remove the retaining nut holding the sight glass and its connection pieces in position and remove the sight glass and its connection pieces. Remove the bent outlet in the same way.



## **SPS 200, SPS 250, SPS 300, SPS 400 and SPS 500 pumps with stainless steel power frame**

The SPS 300 is shown here. Flushing options for the SPS 200, SPS 250, SPS 400 and the SPS 500 are similar.

### **Fitting a flush ring without flush connections**



### **Fitting a flush ring with flush connections**



- Pass the tube through the space in the power frame. Connect it from the back to the dynamic flush system.

### Fitting a flush ring with a static flush device



- Install the flush ring without the bent outlet.
- Fit the bent outlet to the connection on the back of the power end.
- Fill the system with flushing fluid to the level of the top bend of the bent outlet.

## 24 Tightening torques

### SPS 100

Bearing housing cover—bearing housing	M8 DIN 912	10Nm
Feet	M8 DIN 931	25Nm
Grease nipple	M6 DIN 71412	10Nm
Shaft—shaft nut	SW17	100Nm
Front cover—cap nut	SW22	35Nm

### SPS 200

Bearing housing cover—bearing housing	M6 A2 70 DIN 931	7Nm
Power frame—bearing housing	M8 A2 70 DIN 931	16Nm
Power frame—plug	R 1/4" DIN 908	25Nm
Pump housing—power frame	M8 A2 70 DIN 931	16Nm
Shaft—shaft nut	SW32	65Nm
Shaft—locking screw	SW32, LEFT-HAND THREAD	45Nm
Front cover—cap nut	SW22	35Nm

### SPS 250

Bearing housing cover—bearing housing	M6 A2 70 DIN 931	7Nm
Power frame—bearing housing	M8 A2 70 DIN 931	16Nm
Power frame—plug	R 1/4" DIN 908	25Nm
Pump housing—power frame	M8 A2 70 DIN 931	16Nm
Shaft—shaft nut	SW42	65Nm
Shaft—locking screw	SW42, LEFT-HAND THREAD	45Nm
Front cover—cap nut	SW22	45Nm

### SPS 300

Bearing housing cover—bearing housing	M6 A2 70 DIN 931	7Nm
Power frame—bearing housing	M10 A2 70 DIN 931	33Nm
Power frame—plug	R 1/4" DIN 908	25Nm
Pump housing—power frame	M10 A2 70 DIN 931	33Nm
Shaft—shaft nut	SW42	110Nm
Shaft—locking screw	SW42, LEFT-HAND THREAD	95Nm
Front cover—cap nut	SW22	45Nm

### SPS 400

Bearing housing cover—bearing housing	M6 A2 70 DIN 931	7Nm
Power frame—bearing housing	M12 A2 70 DIN 931	56Nm
Power frame—plug	R 1/4" DIN 908	25Nm
Pump housing—power frame	M12 A2 70 DIN 931	56Nm
Shaft—shaft nut	SW60	125Nm
Shaft—locking screw	SW60, LEFT-HAND THREAD	105Nm
Front cover—cap nut	SW22	45Nm

### SPS 500


Bearing housing cover—bearing housing	M6 A2 70 DIN 931	7Nm
Power frame—bearing housing	M12 A2 70 DIN 931	56Nm
Power frame—plug	R 1/4" DIN 908	25Nm
Pump housing—power frame	M12 A2 70 DIN 931	56Nm
Shaft—shaft nut	SW60	125Nm
Shaft—locking screw	SW60, LEFT-HAND THREAD	105Nm
Front cover—cap nut	SW22	56Nm

## 25 Parts lists

With the exceptions of the codes for springs, part codes are composed of three sections in the form xxx-yyy-zz.


xxx is the pump type. yyy is the part. zz is the material.

Where \_\_ appears instead of an alphanumeric code in positions xxx and zz, select from the tables which follow.

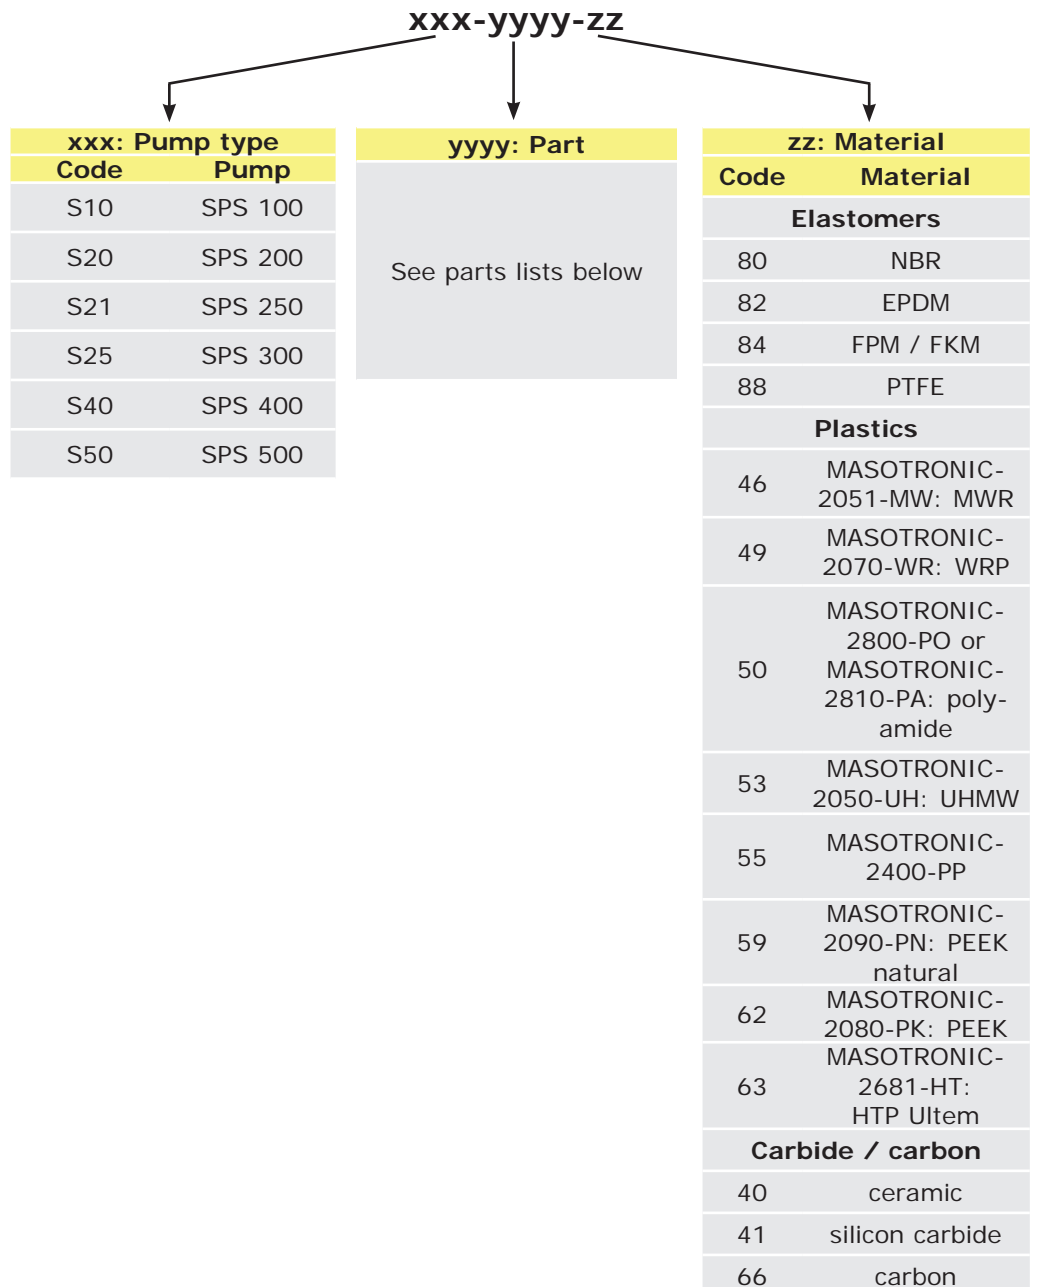

## 25.1 Pumps

SPS 100

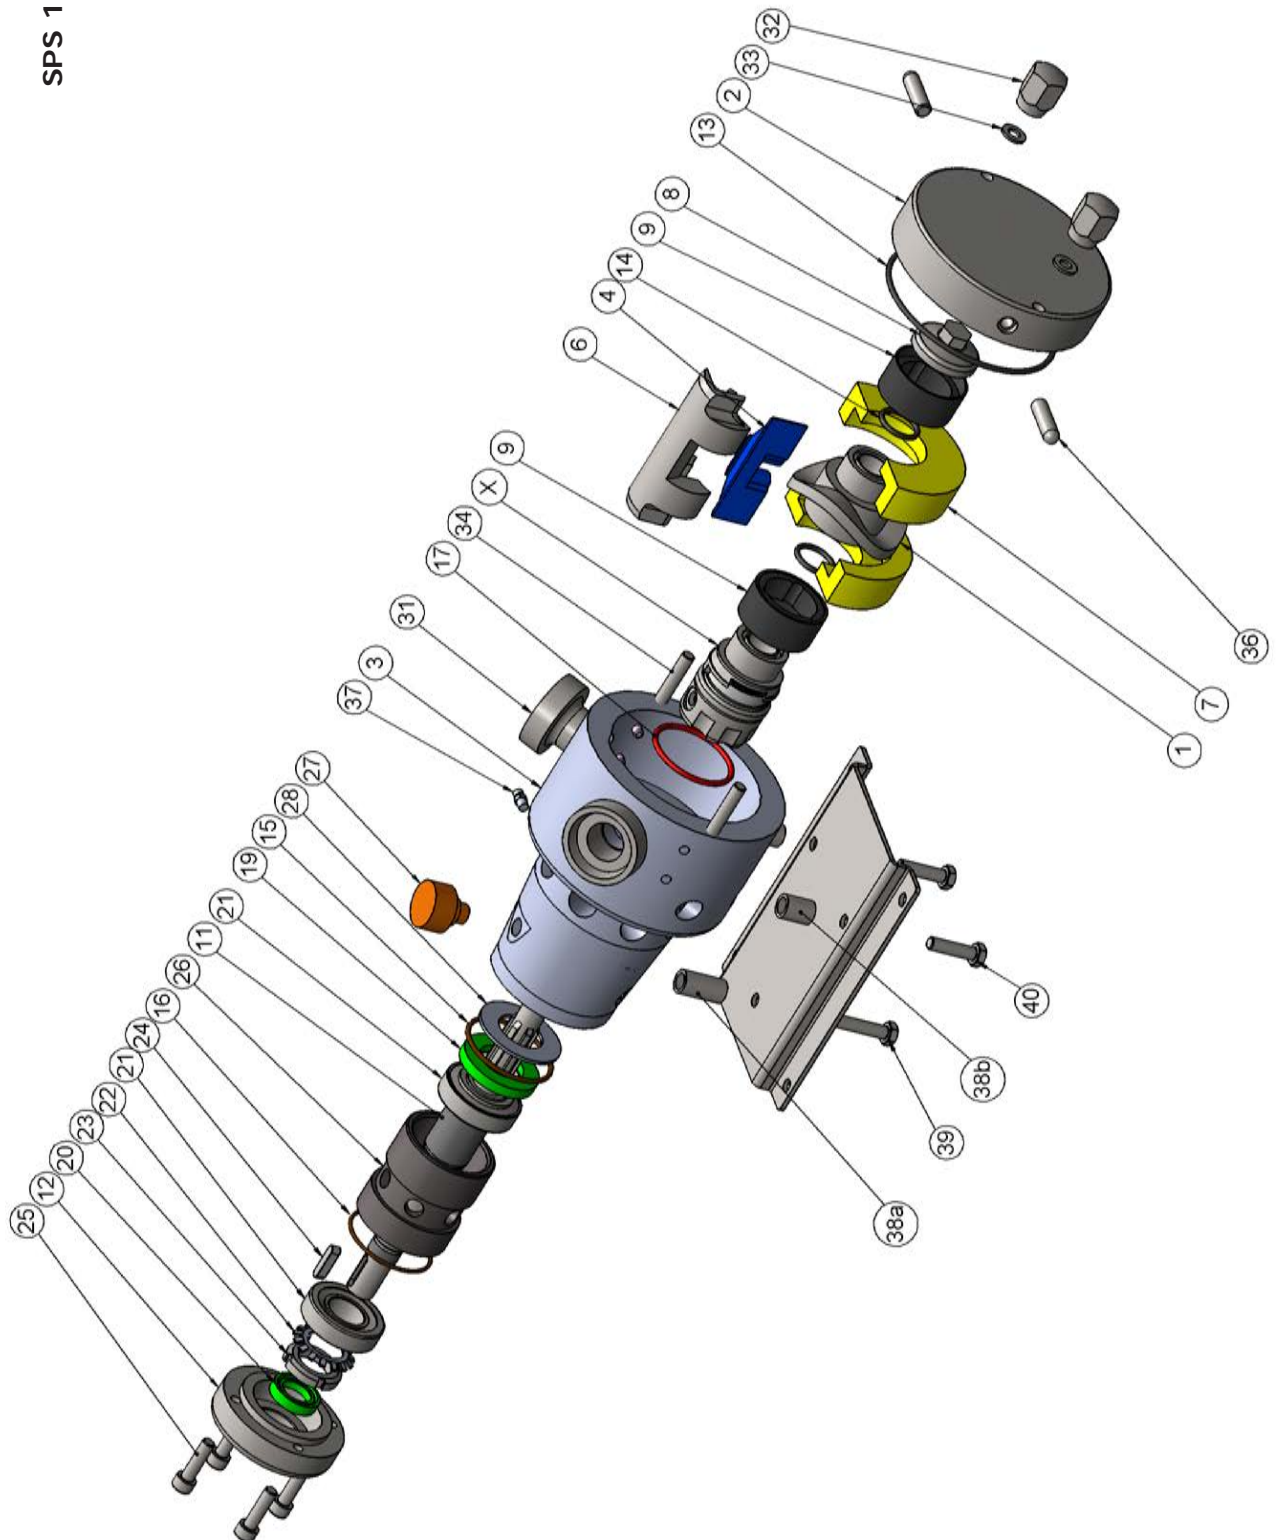




Parts list for SPS 100				
Number	Quantity	Part code	Item	
1	1	S10-0100-10	Rotor	
2	1	S10-0200-10	Front Cover	
3	1	S10-0300-10	Pump housing	
4	1	S10-0400-50	Gate, MASOTRONIC-2810-PA	
	1	S10-0400-53	Gate, MASOTRONIC-2050-UH	
	1	S10-0400-62	Gate, MASOTRONIC-2080-PK	
6	1	S10-0700-10	Gate Guide	
7	2	S10-1097-50	Liner oversized, MASOTRONIC-2800-PO	
	2	S10-1097-62	Liner oversized, MASOTRONIC-2080-PK	
8	1	S10-1094-10	Shaft Nut	
	2	S10-1095-55	Front Support (front- / back bushing), MASOTRONIC-2400-PP	
9	2	S10-1095-62	Front Support (front- / back bushing), MASOTRONIC-2080-PK	
11	1	S10-1107-16	Shaft	
12	1	S10-1108-10	Cover, Bearing Housing	
	1	S10-0010-80	O-ring, NBR	
13	1	S10-0010-82	O-ring, EPDM	
	1	S10-0010-84	O-ring, FPM / FKM	
	1	S10-0011-80	O-ring, NBR	
14	1	S10-0011-82	O-ring, EPDM	
	1	S10-0011-84	O-ring, FPM / FKM	
15	1	S10-0012-80	O-Ring, Bearing Housing, NBR	
16	1	S10-0023-80	O-Ring, Bearing Housing Cover, NBR	
	1	S10-0036-80	O-ring, NBR	
17	1	S10-0036-82	O-ring, EPDM	
	1	S10-0036-84	O-ring, FPM / FKM	
19	1	S10-0013-80	Oil Seal, Inboard, NBR	
20	1	S10-0018-80	Oil Seal, Outboard, NBR	
21	2	S10-0014-25	Tapered Roller Bearing	
22	1	S10-0016-25	Tab Washer, Lock Nut	
23	1	S10-0017-25	Lock Nut	
24	1	S10-0019-25	Shaft Key	
25	4	S10-0020-12	Cap Screw, Bearing Housing Cover	
26	1	S10-1117-10	Bearing Spacer	
27	1	80-1521-50	Vent Valve	
28	1	S10-1109-12	Spacer Ring, Inboard Oil Seal	
29	1	80-3600-12	Nameplate	
30	4	80-3605-12	Grooved Pin	
31	2	Integral with pump housing. Type depends on customer choice	Nozzles (on request)	
32	2	S20-1600-12	Front Cover Nut	
33	2	S20-1601-12	Washer, Front Cover Nut	
34	2	S10-0029-12	Studs	
35	4	S25-0301-10	Taper Pin	
36	2	S10-0250-12	Front Cover Pin	
37	1	S60-1501-12	Grease Nipple	
38a	2	S10-1110-12	Mounting Plate, short	
38b	1	S10-1152-12	Mounting Plate, long	
39	1	S10-1111-12	Bolt, Mounting Plate	
40	2	S10-0035-12	Bolt, Mounting Plate	

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)


# SPS 200 with cast iron power frame

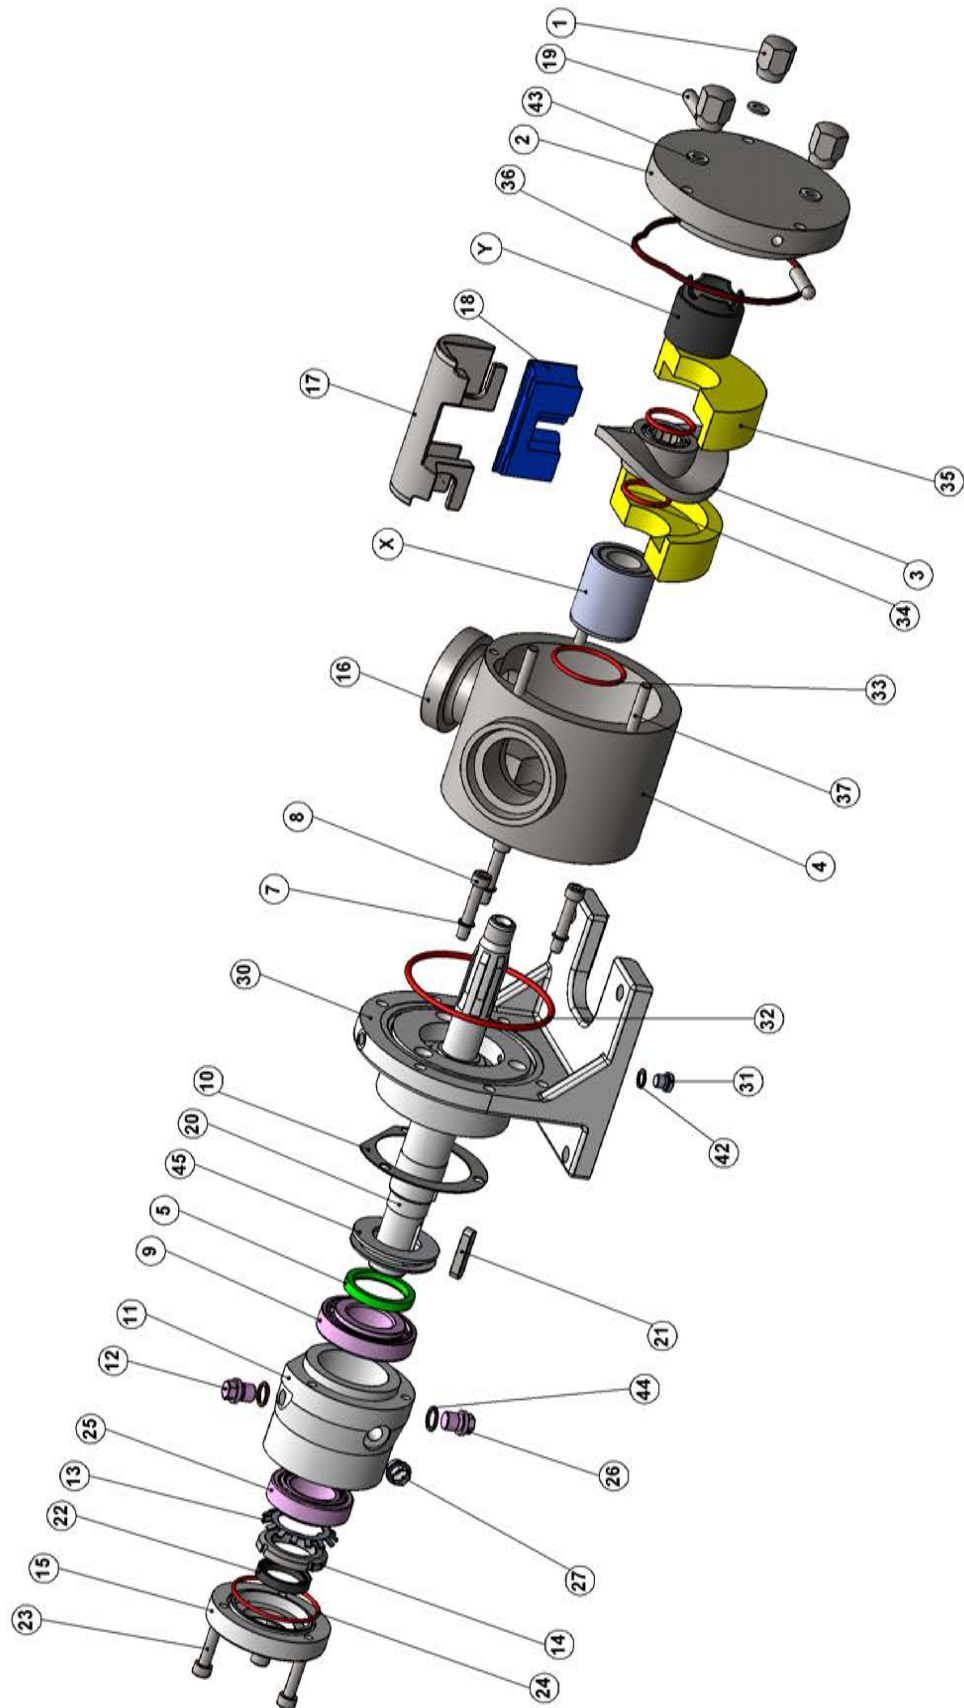

Parts list for SPS 200 with cast iron power frame				
Number	Quantity	Part code	Item	
1	3	S20-1600-12	Cap Nut	
2	1	S20-0200-10	Front Cover	
3	1	S20-0100-10	Rotor	
4	1	S20-0300-10	Pump Housing	
5	1	S20-2300-80	Lip Seal, NBR	
6	1	S25-3900-25	Lifting Eye Bolt	
7	3	S20-2100-33	Seal, Copper	
8	3	S20-2200-12	Cap Screw	
9	1	S20-2400-25	Bearing, Tapered Roller	
10	1	S20-1401-30	Shim-Ring	
11	1	S20-1400-20	Bearing Housing	
12	1	S20-6000-25	Vent Valve	
13	1	S20-2700-25	Tab Washer	
14	1	S20-2800-25	Shaft Nut	
15	1	S20-1500-20	Bearing Housing Cover	
16	2	Integral with pump housing. Type depends on customer choice	Nozzles	
17	1	S20-0700-10	Gate Guide	
18	1	S20-0400-49	Gate MASOTRONIC-2070-WR	
	1	S20-0400-50	Gate MASOTRONIC-2810-PA	
	1	S20-0400-62	Gate MASOTRONIC-2080-PK	
19	2	S20-0250-12	Handle Pin	
20	1	S20-1000-16	Shaft	
21	1	S20-3200-25	Shaft Key	
22	1	S20-3100-80	Lip Seal, NBR	
23	3	S20-2900-12	Cap Screw	
24	1	S20-3000-80	O-Ring, Bearing Housing, NBR	
25	1	S20-2600-25	Bearing, Tapered Roller	
26	1	S20-3700-25	Threaded Plug	
27	1	S20-3800-51	Oil Level Glass	
28	2	S20-1901-12	Washer	
29	2	S20-1900-12	Hexagon Head Cap Screw	
30	1	S20-1300-20	Power Frame	
31	1	S20-2000-25	Lock Nut	
32	1	S20-1753-80	O-Ring, Power Frame, NBR	
33	1	S20-1750-80	O-Ring, Pump Housing, NBR	
34	1	S20-1750-82	O-Ring, Pump Housing, EPDM	
	1	S20-1750-84	O-Ring, Pump Housing, FPM/FKM	
	2	S20-1751-80	O-Ring, Rotor, NBR	
35	2	S20-1751-82	O-Ring, Rotor, EPDM	
	2	S20-1751-84	O-Ring, Rotor, FPM / FKM	
	2	S20-1200-50	Liners, MASOTRONIC-2800-PO	
36	2	S20-1200-62	Liners, MASOTRONIC-2080-PK	
	2	S20-1200-63	Liners, MASOTRONIC-2681-HT	
	1	S20-1701-80	O-Ring, Front Cover, NBR	
37	1	S20-1701-82	O-Ring, Front Cover, EPDM	
	1	S20-1701-84	O-Ring, Front Cover, FPM / FKM	
	3	S20-1800-12	Front Cover Studs	
42	1	S20-2001-33	Seal, Copper	
43	3	S20-1601-12	Washer	
44	1	S20-3701-33	Seal, Copper	
45	1	S20-0513-10	Distance Ring	
X			Seal System	
Y			Front Support	

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)


# SPS 200 with stainless steel power frame

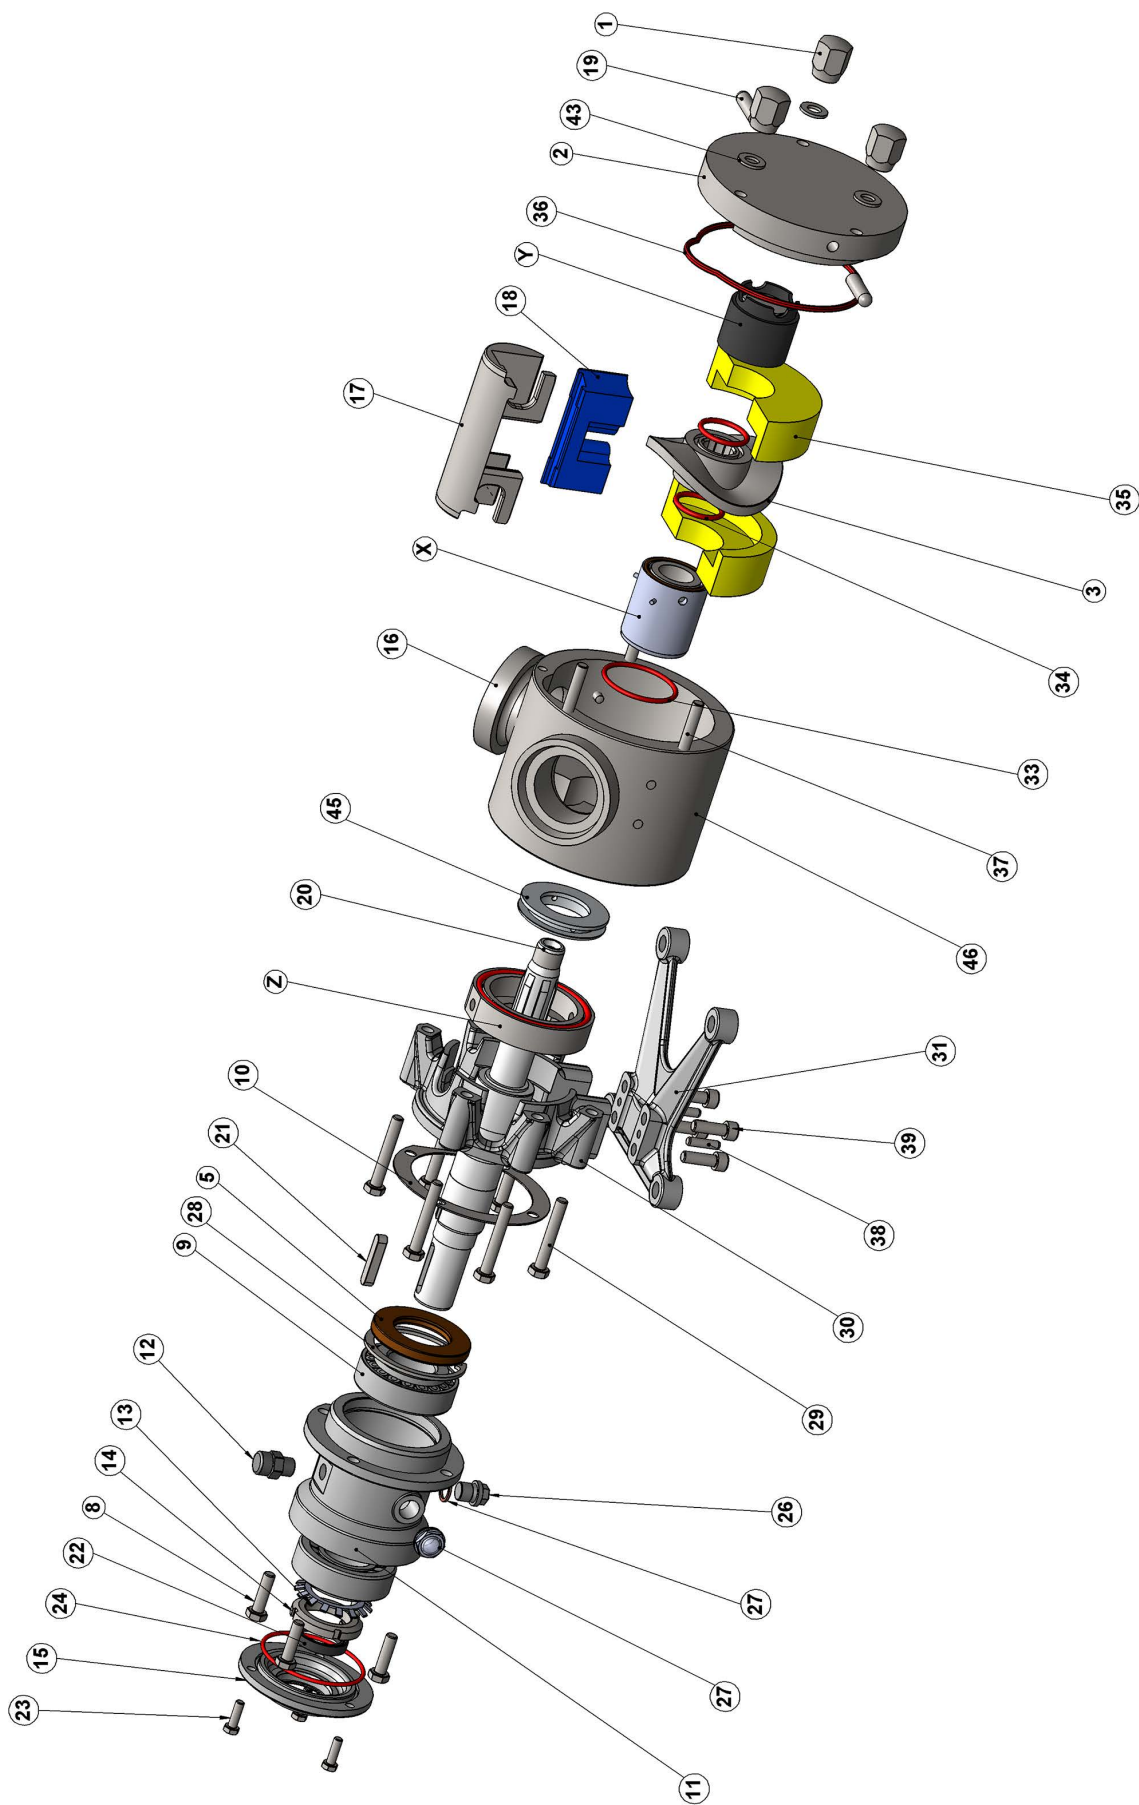

Parts list for SPS 200 with stainless steel power frame			
Number	Quantity	Part code	Item
1	3	S20-1600-12	Cap Nut
2	1	S20-0200-10	Front Cover
3	1	S20-0100-10	Rotor
4	1	S20-0300-10	Pump Housing
5	1	S20-2320-80	Lip seal, inboard
8	4	S20-2220-25	Cap Screw
9	2	S20-2420-25	Tapered Roller Bearing
10	1	S20-1421-30	Shim-Ring
11	1	S20-1420-12	Bearing Housing
12	1	S20-6000-50	Vent Valve
13	1	S20-2700-25	Tab Washer
14	1	S20-2800-25	Shaft Nut
15	1	S20-1520-12	Bearing Housing Cover
16	2	Integral with pump housing. Type depends on customer choice	Nozzles
17	1	S20-0700-10	Gate Guide
18	1	S20-0400-49	Gate MASOTRONIC-2070-WR
	1	S20-0400-50	Gate MASOTRONIC-2810-PA
	1	S20-0400-62	Gate MASOTRONIC-2080-PK
19	2	S20-0250-12	Handle Pin
20	1	S20-1020-16	Shaft
21	1	S20-3200-25	Shaft Key
22	1	S20-3100-80	Lip Seal, NBR
23	3	S20-2920-25	Cap Screw
24	1	S20-3020-80	O-Ring, Bearing Housing, NBR
26	1	S20-2020-12	Threaded Plug
27	1	S20-3820-51	Oil Level Glass
	1	S20-3720-25	Seal Plug (only for ATEX)
28	2	S20-5020-12	Snap ring
29	2	S20-1920-12	Hexagon Head Cap Screw
30	1	S20-1320-12	End plate, Power Frame
31	1	S20-1321-12	Base plate, Power Frame
	1	S20-1750-80	O-Ring, Pump Housing, NBR
33	1	S20-1750-82	O-Ring, Pump Housing, EPDM
	1	S20-1750-84	O-Ring, Pump Housing, FPM/FKM
	2	S20-1751-80	O-Ring, Rotor, NBR
34	2	S20-1751-82	O-Ring, Rotor, EPDM
	2	S20-1751-84	O-Ring, Rotor, FPM / FKM
	2	S20-1200-50	Liners, MASOTRONIC-2800-PO
35	2	S20-1200-62	Liners, MASOTRONIC-2080-PK
	2	S20-1200-63	Liners, MASOTRONIC-2681-HT
	1	S20-1701-80	O-Ring, Front Cover, NBR
36	1	S20-1701-82	O-Ring, Front Cover, EPDM
	1	S20-1701-84	O-Ring, Front Cover, FPM / FKM
37	3	S20-1800-12	Front Cover Studs
38	2	S20-5010-12	Pin
39	4	S20-5001-12	Socket head cap screw
43	3	S20-1601-12	Washer
44	1	S20-3721-33	Seal, Copper
45	1	S20-0513-10	Distance Ring
X			Seal System
Y			Front Support
Z			Sealing/Distance ring

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)

# SPS 250 with stainless steel power frame

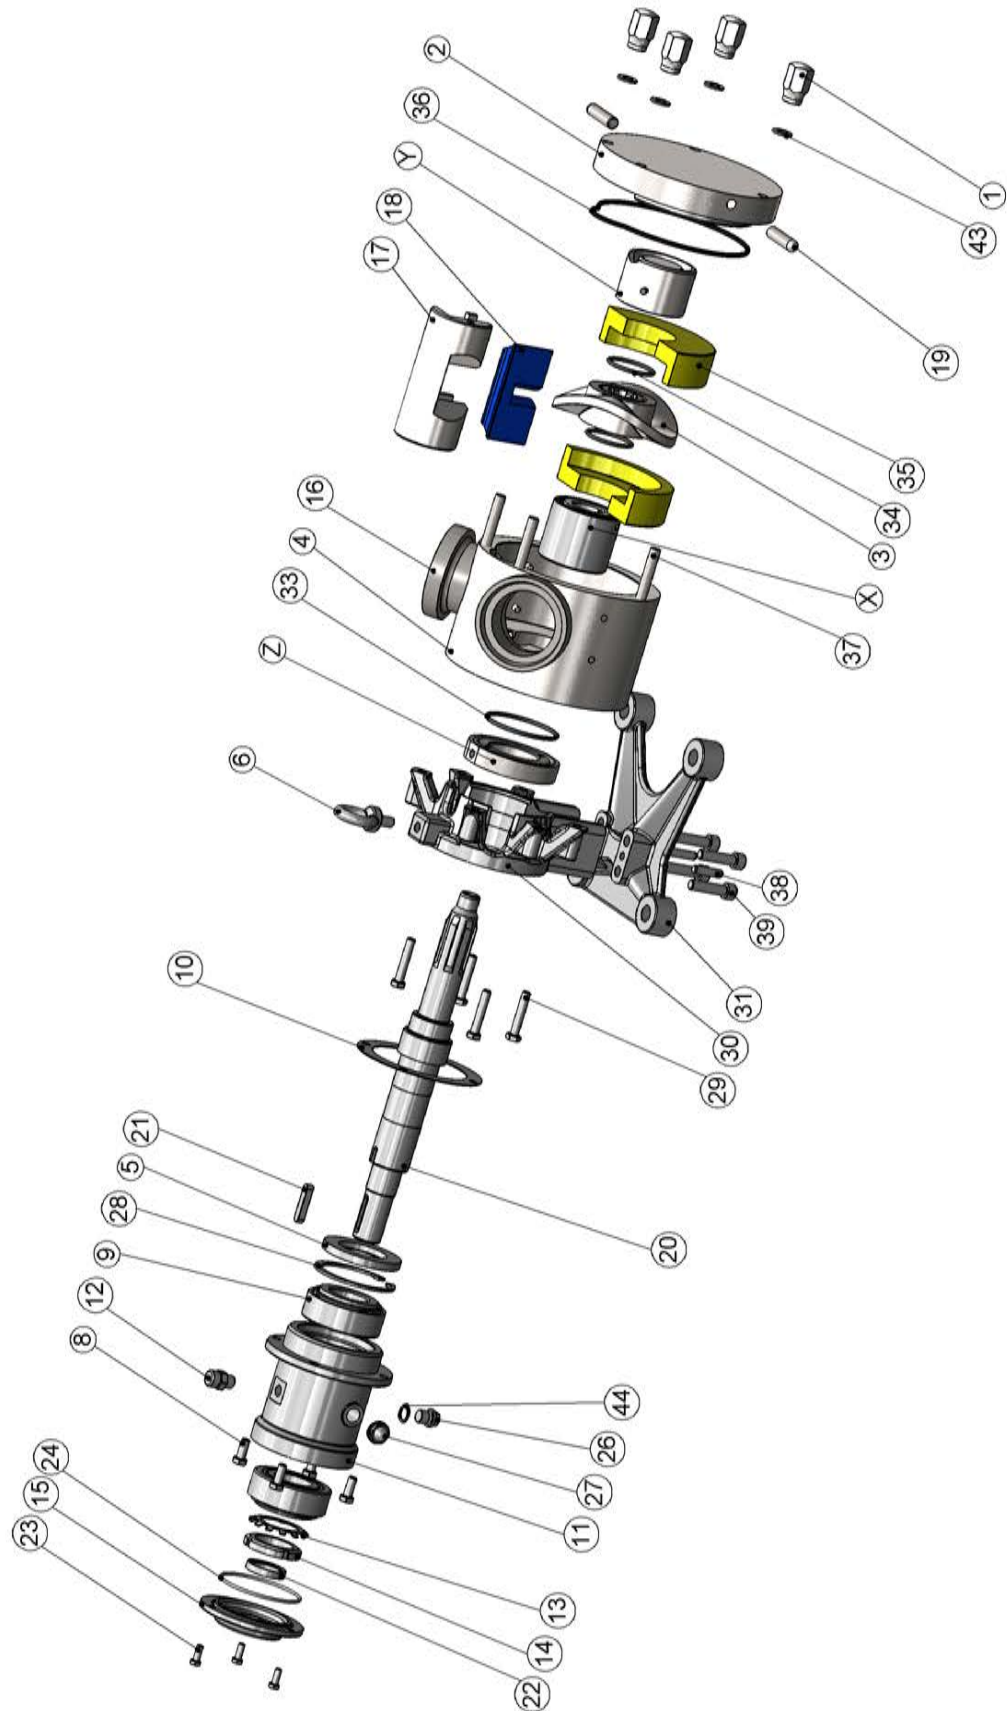




Parts list for SPS 250 with stainless steel power frame				
Number	Quantity	Part code	Item	
1	4	S21-1600-12	Cap Nut	
2	1	S21-0200-10	Front Cover	
3	1	S21-0100-10	Rotor	
4	1	S21-0300-10	Pump Housing	
5	1	S21-2320-80	Lip seal, inboard	
6	1	S21-3920-12	Lifting bolt M12	
8	4	S21-2220-12	Cap Screw	
9	2	S21-2420-25	Bearing, Tapered Roller	
10	1	S21-1421-30	Shim Ring	
11	1	S21-1420-12	Support	
12	1	S21-6000-50	Vent Valve	
13	1	S21-2700-25	Tab Washer	
14	1	S21-2800-25	Shaft Nut	
15	1	S21-1520-12	Cover, bearing housing	
		Integral with		
16	2	pump housing, Type depends on customer choice	Nozzles	
17	1	S21-0700-10	Gate Guide	
	1	S21-0400-49	Gate, MASOTRONIC-2070-WR	
18	1	S21-0400-50	Gate, MASOTRONIC-2810-PA	
	1	S21-0400-62	Gate, MASOTRONIC-2080-PK	
19	2	S21-0250-12	Handle Pin	
20	1	S21-1020-16	Shaft	
21	1	S21-3200-25	Shaft Key	
22	1	S21-3100-80	Lip Seal, NBR	
23	4	S21-2920-12	Cap Screw	
24	1	S21-3020-80	O-ring, bearing housing cover	
26	1	S21-2020-12	Lock nut with hexagon socket	
27	1	S21-3820-51	Oil Level Glass	
	1	S21-3720-25	Seal Plug (only for ATEX)	
28	2	S21-5020-12	Snap ring	
29	4	S21-1920-12	Cap Screw	
30	1	S21-1320-12	End plate, Power Frame	
31	1	S21-1321-12	Base plate, Power Frame	
	1	S21-1750-80	O-Ring, Pump Housing, NBR	
33	1	S21-1750-82	O-Ring, Pump Housing, EPDM	
	1	S21-1750-84	O-Ring, Pump Housing, FPM/FKM	
	2	S21-1751-80	O-Ring, Rotor, NBR	
34	2	S21-1751-82	O-Ring, Rotor, EPDM	
	2	S21-1751-84	O-Ring, Rotor, FPM / FKM	
	2	S21-1200-50	Liners, MASOTRONIC-2800-PO	
35	2	S21-1200-62	Liners, MASOTRONIC-2080-PK	
	2	S21-1200-63	Liners, MASOTRONIC-2681-HT	
	1	S21-1701-80	O-Ring, Front Cover, NBR	
36	1	S21-1701-82	O-Ring, Front Cover, EPDM	
	1	S21-1701-84	O-Ring, Front Cover, FPM/FKM	
37	4	S21-1800-12	Front Cover Studs	
38	2	S21-5010-12	Pin	
39	4	S21-5001-12	Socket head cap screw	
43	4	S21-1601-12	Washer	
44	1	S21-3721-33	Seal, Copper	
X			Seal System	
Y			Front Support	
Z			Sealing/Distance ring	

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)


## SPS 300 with cast iron power frame

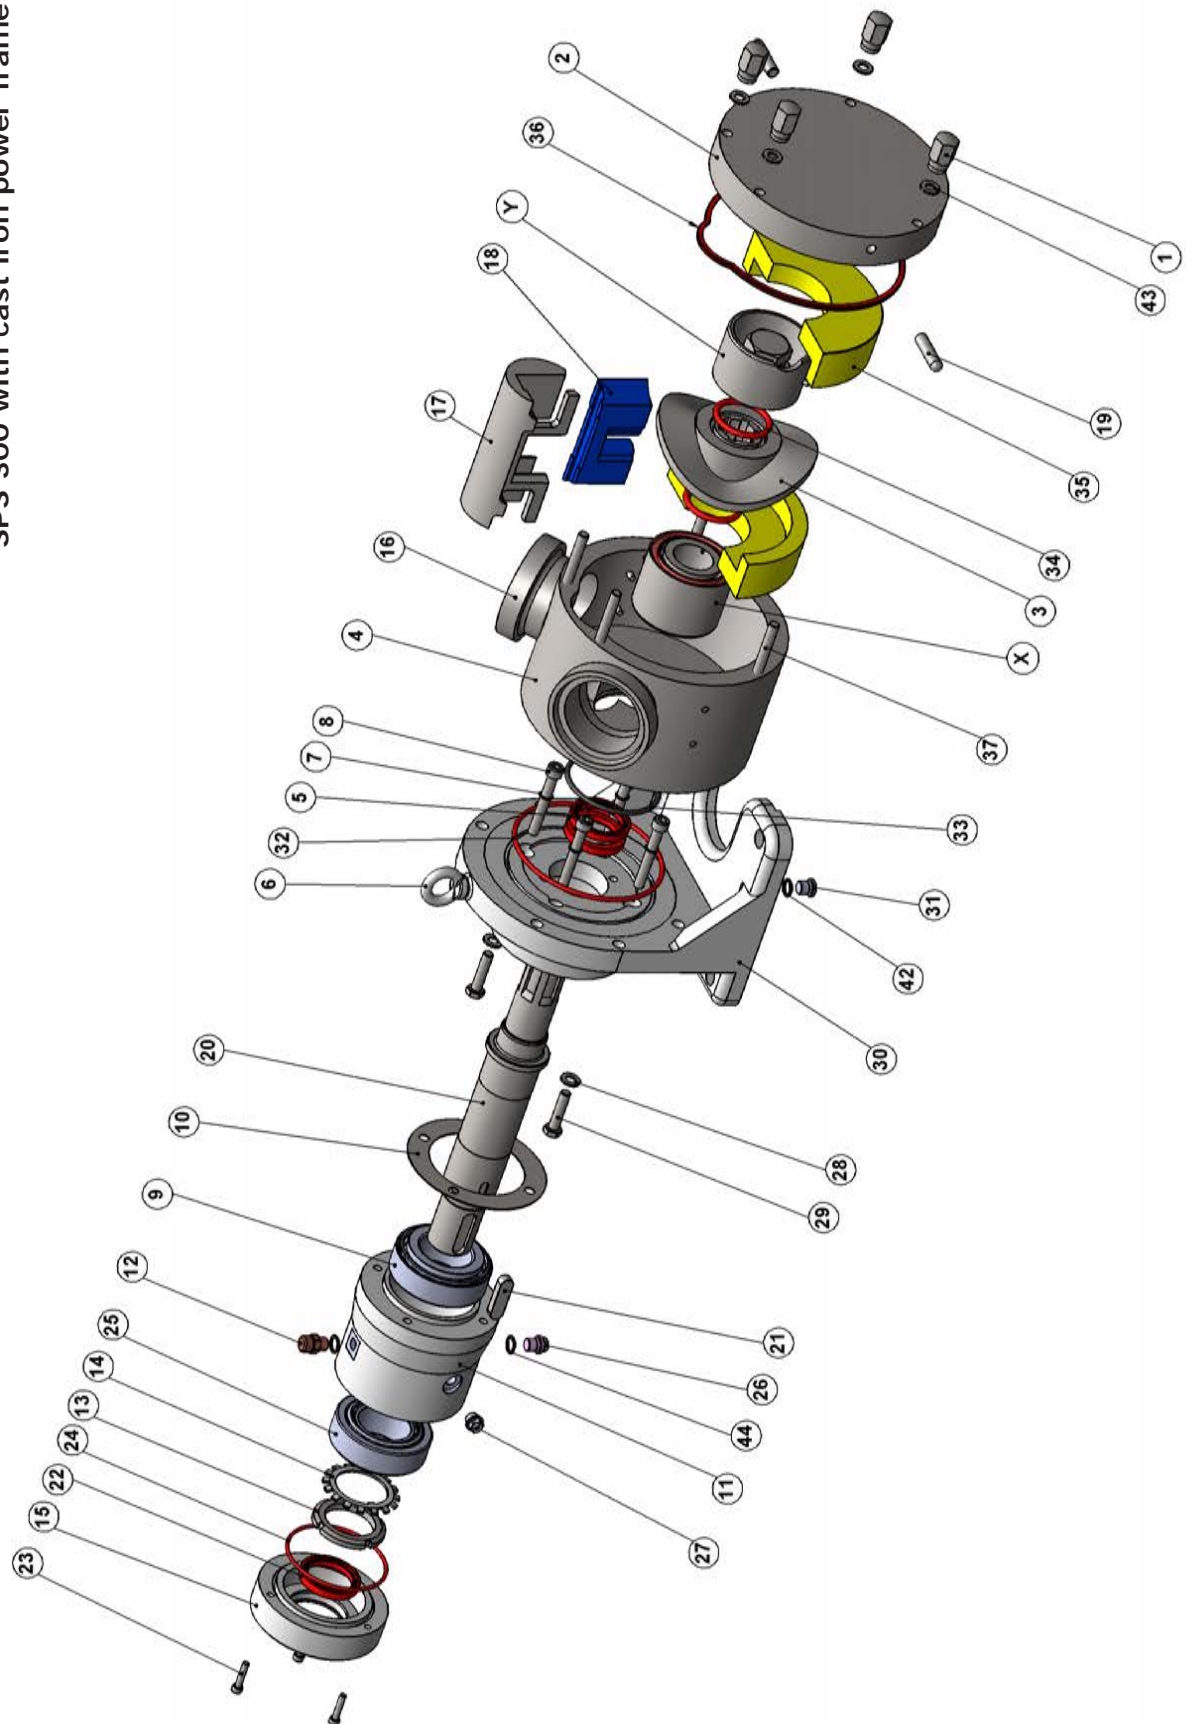

Parts list for SPS 300 with cast iron power frame				
Number	Quantity	Part code	Item	
1	4	S25-1600-12	Cap Nut	
2	1	S25-0200-10	Front Cover	
3	1	S25-0100-10	Rotor	
4	1	S25-0300-10	Pump Housing	
5	2	S25-2300-80	Lip Seal, NBR	
6	1	S25-3900-25	Lifting Eye Bolt	
7	4	S25-2100-33	Seal, Copper	
8	4	S25-2200-12	Cap Screw	
9	1	S25-2400-25	Bearing, Tapered Roller	
10	1	S25-1401-30	Shim-Ring	
11	1	S25-1400-20	Bearing Housing	
12	1	S25-6000-25	Vent Valve	
13	1	S25-2700-25	Tab Washer	
14	1	S25-2800-25	Shaft Nut	
15	1	S25-1500-20	Bearing Housing Cover	
16	2	Integral with pump housing. Type depends on customer choice	Nozzles	
17	1	S25-0700-10	Gate Guide	
18	1	S25-0400-49	Gate, MASOTRONIC-2070-WR	
18	1	S25-0400-50	Gate, MASOTRONIC-2810-PA	
19	1	S25-0400-62	Gate, MASOTRONIC-2080-PK	
20	2	S25-0250-12	Handle Pin	
21	1	S25-1000-16	Shaft	
22	1	S25-3200-25	Shaft Key	
23	4	S25-3100-80	Lip Seal, NBR	
23	4	S25-2900-12	Cap Screw	
24	1	S25-3000-80	O-Ring, Bearing Housing, NBR	
25	1	S25-2600-25	Bearing, Tapered Roller	
26	1	S25-3700-25	Threaded Plug	
27	1	S25-3800-51	Oil Level Glass	
28	1	S25-3700-25	Seal Plug (only for ATEX)	
29	1	S25-1901-12	Washer	
29	2	S25-1900-12	Hexagon Head Cap Screw	
30	1	S25-1300-20	Power Frame	
31	1	S25-2000-25	Lock Nut	
32	1	S25-1753-80	O-Ring, Power Frame, NBR	
32	1	S25-1753-82	O-Ring, Power Frame, EPDM	
32	1	S25-1753-84	O-Ring, Power Frame, FPM/FKM	
33	1	S25-1750-80	O-Ring, Pump Housing, NBR	
33	1	S25-1750-82	O-Ring, Pump Housing, EPDM	
33	1	S25-1750-84	O-Ring, Pump Housing, FPM/FKM	
34	2	S25-1751-80	O-Ring, Rotor, NBR	
34	2	S25-1751-82	O-Ring, Rotor, EPDM	
34	2	S25-1751-84	O-Ring, Rotor, FPM / FKM	
35	2	S25-1200-50	Liners, MASOTRONIC-2800-PO	
35	2	S25-1200-62	Liners, MASOTRONIC-2080-PK	
35	2	S25-1200-63	Liners, MASOTRONIC-2681-HT	
36	1	S25-1701-80	O-Ring, Front Cover, NBR	
36	1	S25-1701-82	O-Ring, Front Cover, EPDM	
36	1	S25-1701-84	O-Ring, Front Cover, FPM/FKM	
37	4	S25-1800-12	Front Cover Studs	
42	1	S25-2001-33	Seal, Copper	
43	4	S25-1601-12	Washer	
44	1	S25-3701-33	Seal, Copper	
X			Seal System	
Y			Front Support	

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)


SPS 300 with stainless steel power frame

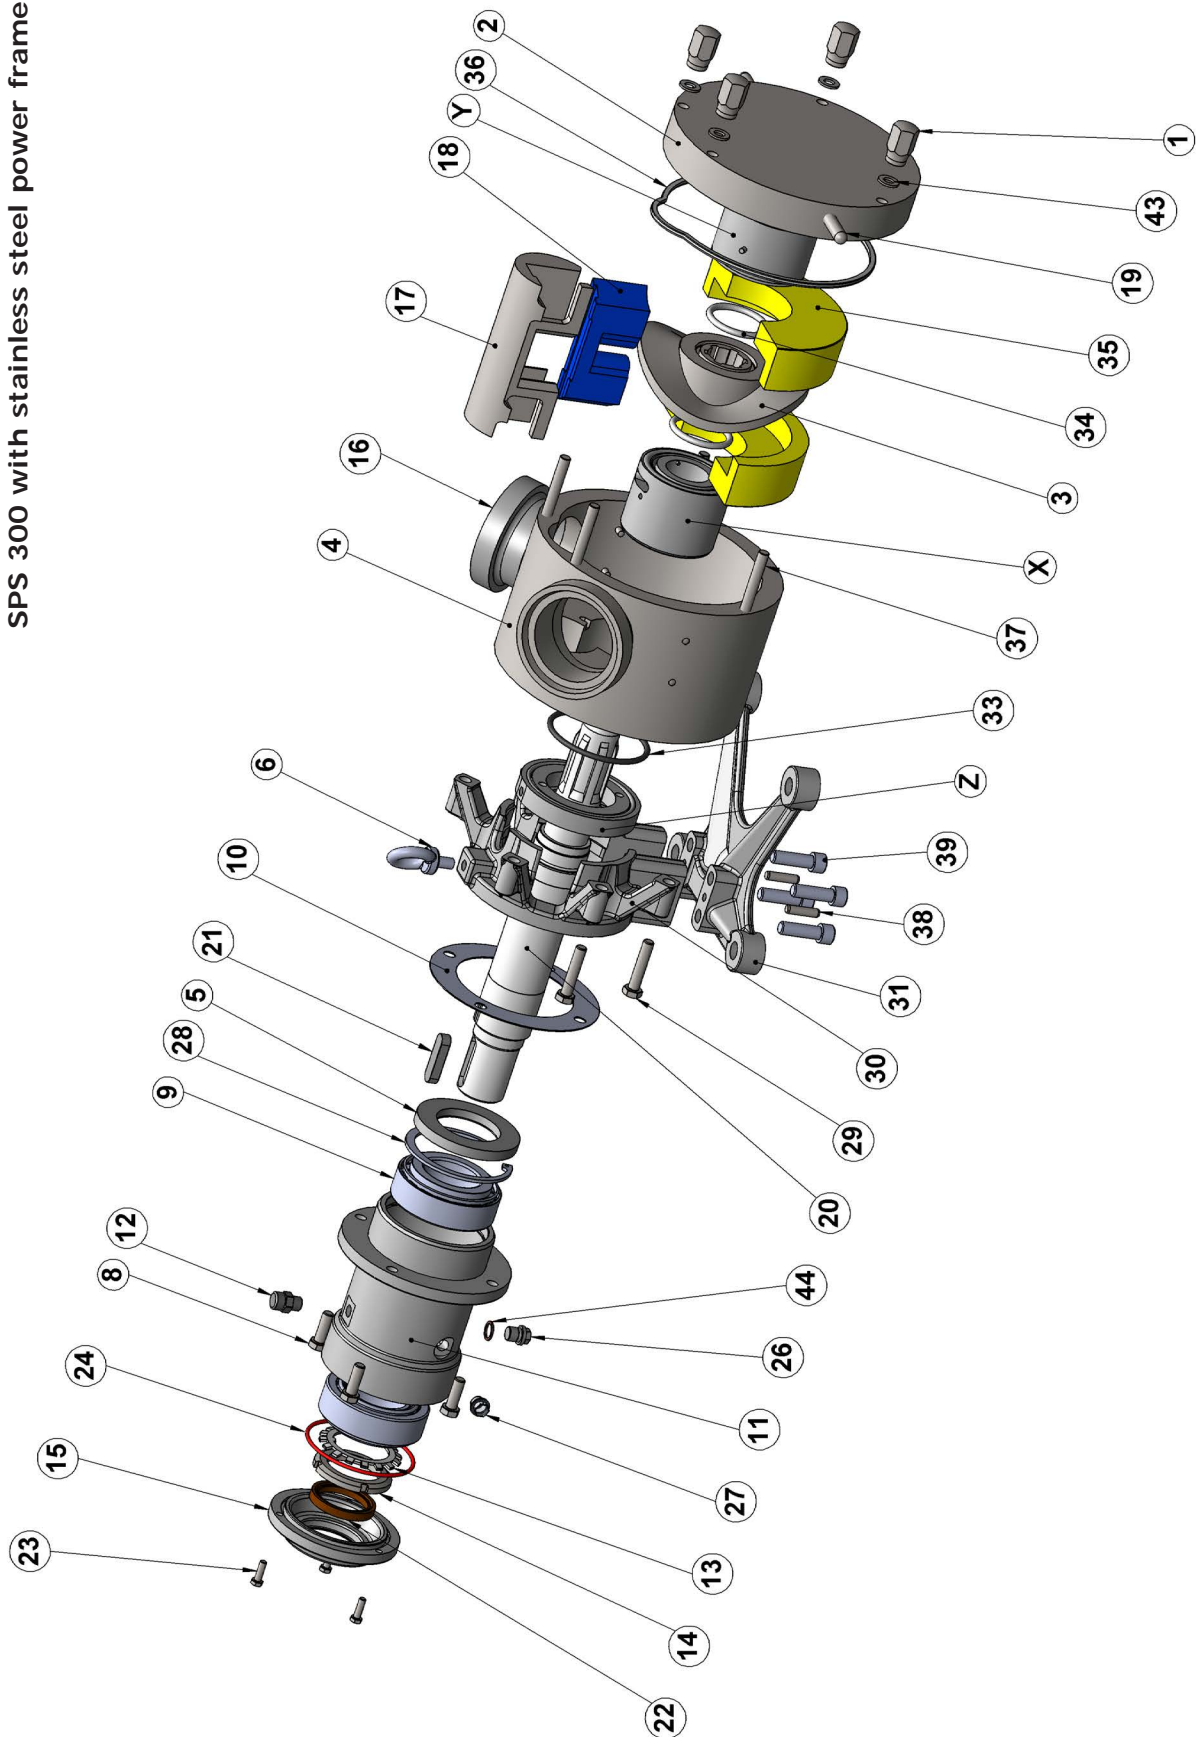

Parts list for SPS 300 with stainless steel power frame				
Number	Quantity	Part code	Item	
1	4	S25-1600-12	Cap Nut	
2	1	S25-0200-10	Front Cover	
3	1	S25-0100-10	Rotor	
4	1	S25-0300-10	Pump Housing	
5	1	S25-2320-80	Lip seal, inboard	
6	1	S25-3920-12	Lifting bolt M12	
8	4	S25-2220-12	Cap Screw	
9	2	S25-2420-25	Bearing, Tapered Roller	
10	1	S25-1421-30	Shim Ring	
11	1	S25-1420-12	Support	
12	1	S25-6000-50	Vent Valve	
13	1	S25-2700-25	Tab Washer	
14	1	S25-2800-25	Shaft Nut	
15	1	S25-1520-12	Cover, bearing housing	
16	2	Integral with pump housing. Type depends on customer choice	Nozzles	
17	1	S25-0700-10	Gate Guide	
18	1	S25-0400-49	Gate, MASOTRONIC-2070-WR	
18	1	S25-0400-50	Gate, MASOTRONIC-2810-PA	
19	2	S25-0400-62	Gate, MASOTRONIC-2080-PK	
20	1	S25-0250-12	Handle Pin	
21	1	S25-1020-16	Shaft	
22	1	S25-3200-25	Shaft Key	
23	4	S25-3100-80	Lip Seal, NBR	
24	1	S25-2920-12	Cap Screw	
24	1	S25-3020-80	O-ring, bearing housing cover	
26	1	S25-2020-12	Lock nut with hexagon socket	
27	1	S25-3820-51	Oil Level Glass	
28	2	S25-3720-25	Seal Plug (only for ATEX)	
29	4	S25-5020-12	Snap ring	
30	4	S25-1920-12	Cap Screw	
31	1	S25-1320-12	End plate, Power Frame	
33	1	S25-1321-12	Base plate, Power Frame	
33	1	S25-1750-80	O-Ring, Pump Housing, NBR	
33	1	S25-1750-82	O-Ring, Pump Housing, EPDM	
34	2	S25-1750-84	O-Ring, Pump Housing, FPM/FKM	
34	2	S25-1751-80	O-Ring, Rotor, NBR	
34	2	S25-1751-82	O-Ring, Rotor, EPDM	
34	2	S25-1751-84	O-Ring, Rotor, FPM / FKM	
35	2	S25-1200-50	Liners, MASOTRONIC-2800-PO	
35	2	S25-1200-62	Liners, MASOTRONIC-2080-PK	
35	2	S25-1200-63	Liners, MASOTRONIC-2681-HT	
36	1	S25-1701-80	O-Ring, Front Cover, NBR	
36	1	S25-1701-82	O-Ring, Front Cover, EPDM	
37	1	S25-1701-84	O-Ring, Front Cover, FPM/FKM	
37	4	S25-1800-12	Front Cover Studs	
38	2	S25-5010-12	Pin	
39	4	S25-5001-12	Socket head cap screw	
43	4	S25-1601-12	Washer	
44	1	S25-3721-33	Seal, Copper	
X			Seal System	
Y			Front Support	
Z			Sealing/Distance ring	

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)

# SPS 400 with cast iron frame

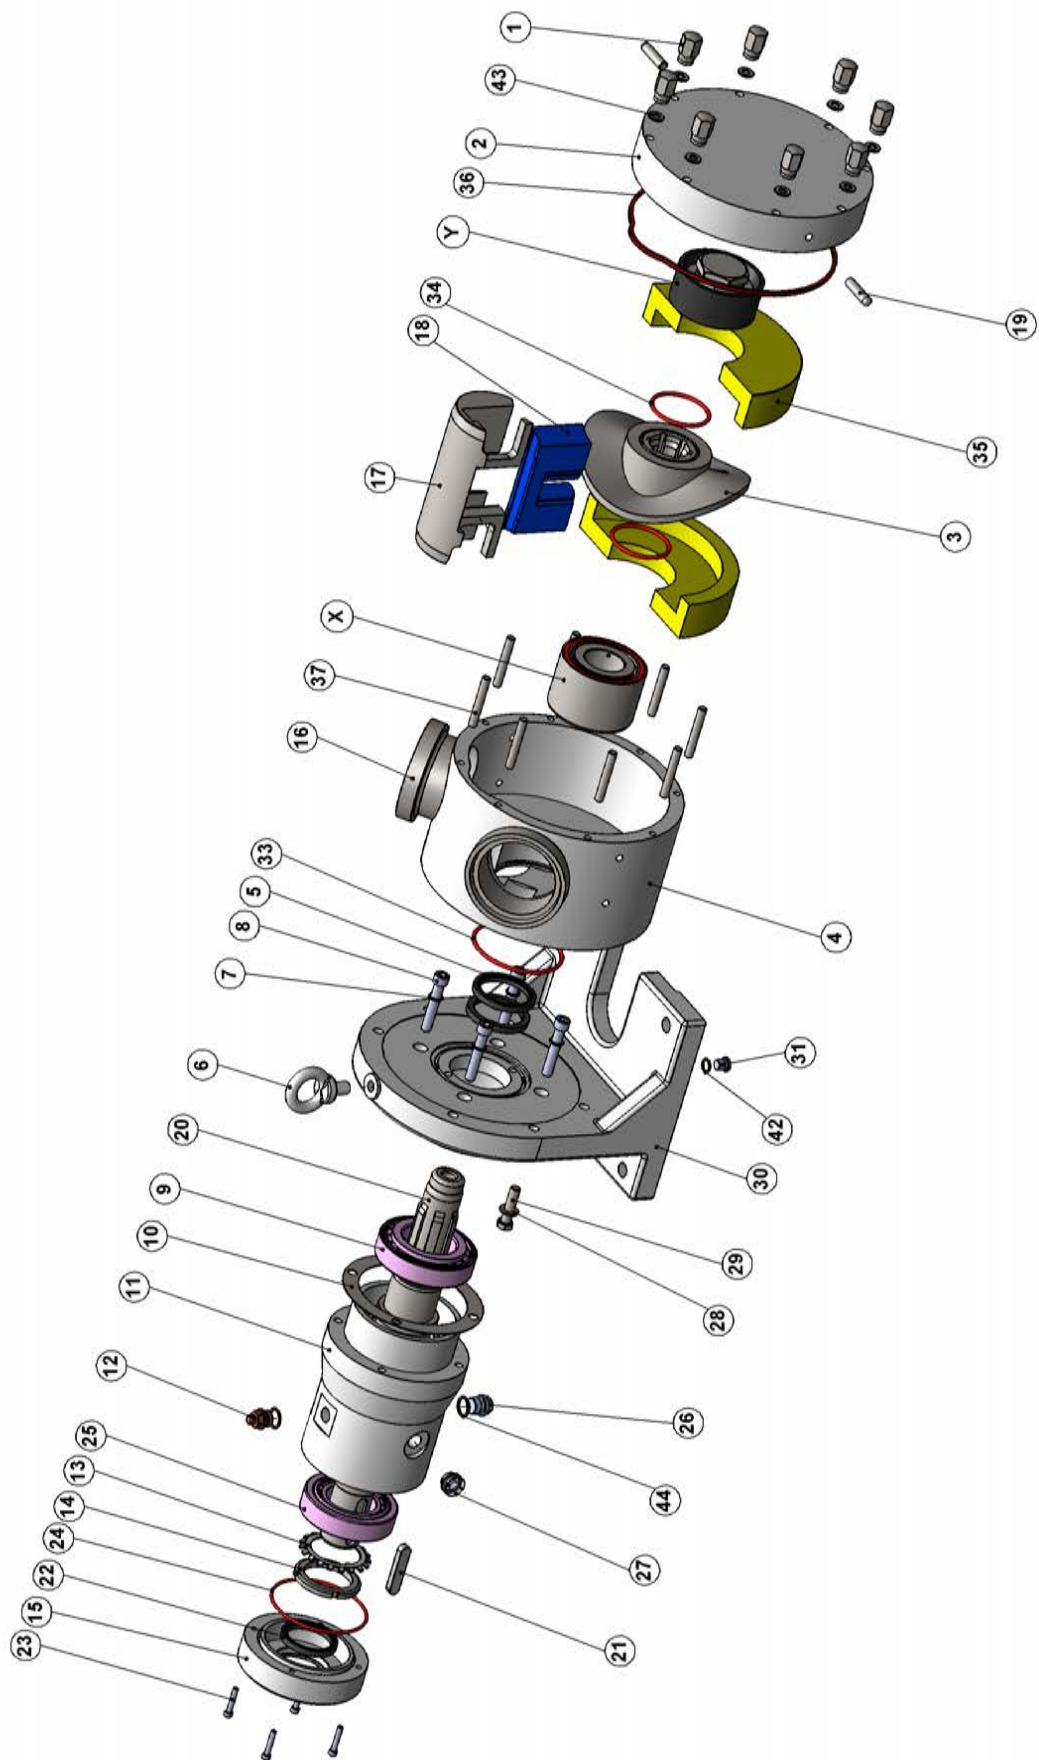




Parts list for SPS 400 with cast iron frame			
Number	Quantity	Part code	Item
1	8	S40-1600-12	Cap Nut
2	1	S40-0200-10	Front Cover
3	1	S40-0100-10	Rotor
4	1	S40-0300-10	Pump Housing
5	2	S40-2300-80	Lip Seal, NBR
6	1	S40-3900-25	Lifting Eye Bolt
7	4	S40-2100-33	Seal, Copper
8	4	S40-2200-12	Cap Screw
9	1	S40-2400-25	Bearing, Tapered Roller
10	1	S40-1401-30	Shim-Ring
11	1	S40-1400-20	Bearing Housing
12	1	S40-6000-25	Vent Valve
13	1	S40-2700-25	Tab Washer
14	1	S40-2800-25	Shaft Nut
15	1	S40-1500-20	Bearing Housing Cover
16	2	Integral with pump housing. Type depends on customer choice	Nozzles
17	1	S40-0700-10	Gate Guide
18	1	S40-0400-49	Gate, MASOTRONIC-2070-WR
18	1	S40-0400-50	Gate, MASOTRONIC-2810-PA
19	1	S40-0400-62	Gate, MASOTRONIC-2080-PK
20	2	S40-0250-12	Handle Pin
21	1	S40-1000-16	Shaft
22	1	S40-3200-25	Shaft Key
23	4	S40-3100-80	Lip Seal, NBR
24	1	S40-2900-12	Cap Screw
24	1	S40-3000-80	O-Ring, Bearing Housing, NBR
25	1	S40-2600-25	Bearing, Tapered Roller
26	1	S40-3700-25	Threaded Plug
27	1	S40-3800-51	Oil Level Glass
27	1	S40-3700-25	Seal Plug (only for ATEX)
28	2	S40-1901-12	Washer
29	2	S40-1900-12	Hexagon Head Cap Screw
30	1	S40-1300-20	Power Frame
31	1	S40-2000-25	Lock Nut
32	1	S40-1753-80	O-Ring, Power Frame, NBR
32	1	S40-1753-82	O-Ring, Power Frame, EPDM
32	1	S40-1753-84	O-Ring, Power Frame, FPM/FKM
33	1	S40-1750-80	O-Ring, Pump Housing, NBR
33	1	S40-1750-82	O-Ring, Pump Housing, EPDM
33	1	S40-1750-84	O-Ring, Pump Housing, FPM/FKM
34	2	S40-1751-80	O-Ring, Rotor, NBR
34	2	S40-1751-82	O-Ring, Rotor, EPDM
34	2	S40-1751-84	O-Ring, Rotor, FPM / FKM
35	2	S40-1200-50	Liners. MASOTRONIC-2800-PO
35	2	S40-1200-62	Liners. MASOTRONIC-2080-PK
35	2	S40-1200-63	Liners. MASOTRONIC-2681-HT
36	1	S40-1701-80	O-Ring, Front Cover, NBR
36	1	S40-1701-82	O-Ring, Front Cover, EPDM
37	1	S40-1701-84	O-Ring, Front Cover, FPM / FKM
37	8	S40-1800-12	Front Cover Studs
42	1	S40-2001-33	Seal, Copper
43	8	S40-1601-12	Washer
44	1	S40-3701-33	Seal , Copper
X			Seal System
Y			Front Support

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)


# SPS 400 with stainless steel frame

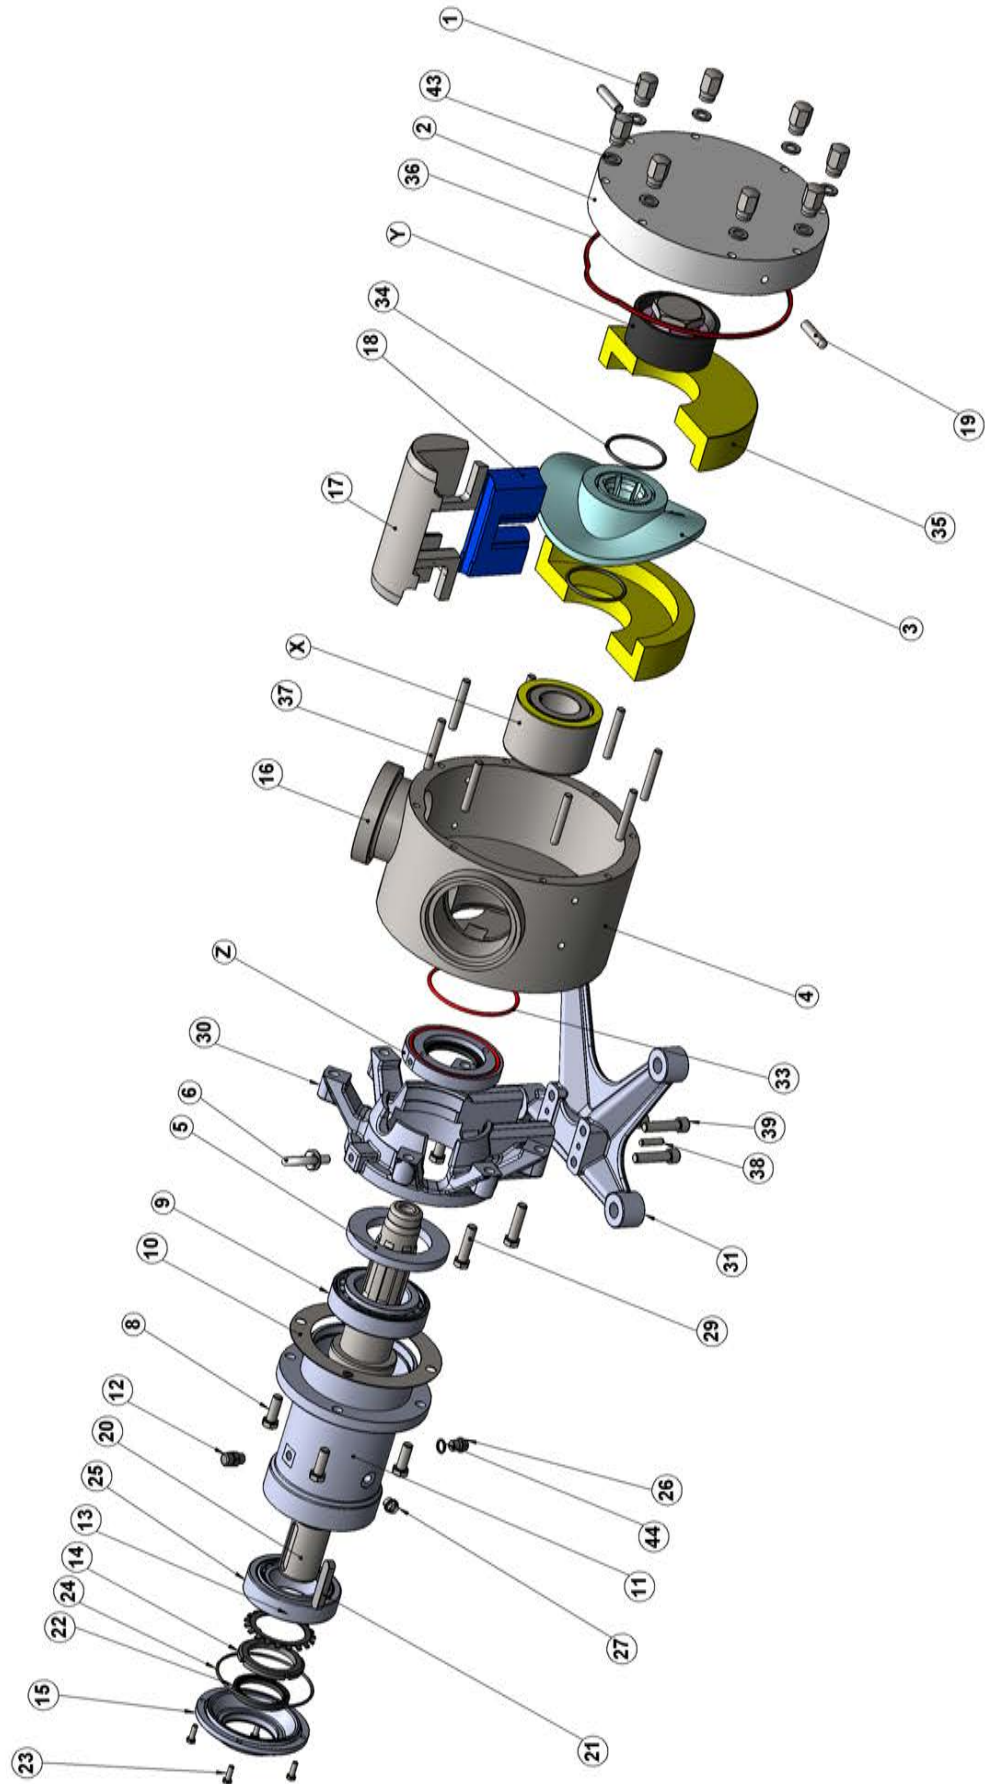

Parts list for SPS 400 with stainless steel frame			
Number	Quantity	Part code	Item
1	8	S40-1600-12	Cap Nut
2	1	S40-0200-10	Front Cover
3	1	S40-0100-10	Rotor
4	1	S40-0300-10	Pump Housing
5	1	S40-2320-80	Lip Seal, NBR
6	1	S40-3920-12	Lifting Eye Bolt
8	4	S40-2220-12	Cap Screw
9	1	S40-2420-25	Bearing, Tapered Roller
10	1	S40-1421-30	Shim-Ring
11	1	S40-1420-12	Bearing Housing
12	1	S40-6000-50	Vent Valve
13	1	S40-2700-25	Tab Washer
14	1	S40-2800-25	Shaft Nut
15	1	S40-1520-12	Bearing Housing Cover
16	2	Integral with pump housing. Type depends on customer choice	Nozzles
17	1	S40-0700-10	Gate Guide
18	1	S40-0400-49	Gate, MASOTRONIC-2070-WR
18	1	S40-0400-50	Gate, MASOTRONIC-2810-PA
19	1	S40-0400-62	Gate, MASOTRONIC-2080-PK
20	2	S40-0250-12	Handle Pin
21	1	S40-1020-16	Shaft
22	1	S40-3200-25	Shaft Key
23	1	S40-3100-80	Lip Seal, NBR
24	4	S40-2920-12	Cap Screw
24	1	S40-3020-80	O-Ring, Bearing Housing, NBR
25	1	S40-2600-25	Bearing, Tapered Roller
26	1	S40-2020-12	Threaded Plug
27	1	S40-3820-51	Oil Level Glass
27	1	S40-3720-25	Seal Plug (only for ATEX)
29	4	S40-1920-12	Cap Screw
30	1	S40-1320-12	End plate, Power Frame
31	1	S40-1321-12	Base plate, Power Frame
33	1	S40-1750-80	O-Ring, Pump Housing, NBR
33	1	S40-1750-82	O-Ring, Pump Housing, EPDM
33	1	S40-1750-84	O-Ring, Pump Housing, FPM/FKM
34	2	S40-1751-80	O-Ring, Rotor, NBR
34	2	S40-1751-82	O-Ring, Rotor, EPDM
34	2	S40-1751-84	O-Ring, Rotor, FPM / FKM
35	2	S40-1200-50	Liners. MASOTRONIC-2800-PO
35	2	S40-1200-62	Liners. MASOTRONIC-2080-PK
35	2	S40-1200-63	Liners. MASOTRONIC-2681-HT
36	1	S40-1701-80	O-Ring, Front Cover, NBR
36	1	S40-1701-82	O-Ring, Front Cover, EPDM
36	1	S40-1701-84	O-Ring, Front Cover, FPM / FKM
37	8	S40-1800-12	Front Cover Studs
38	2	S40-5010-12	Pin
39	4	S40-5001-12	Socket head cap screw
42	1	S40-2001-33	Seal, Copper
43	8	S40-1601-12	Washer
44	1	S40-372-33	Seal, Copper
X			Seal System
Y			Front Support

Please quote your pump's serial number when you order spare parts (see the type plate on the bearing housing; see 9 *Pump specifications*)


## SPS 500 with stainless steel power frame

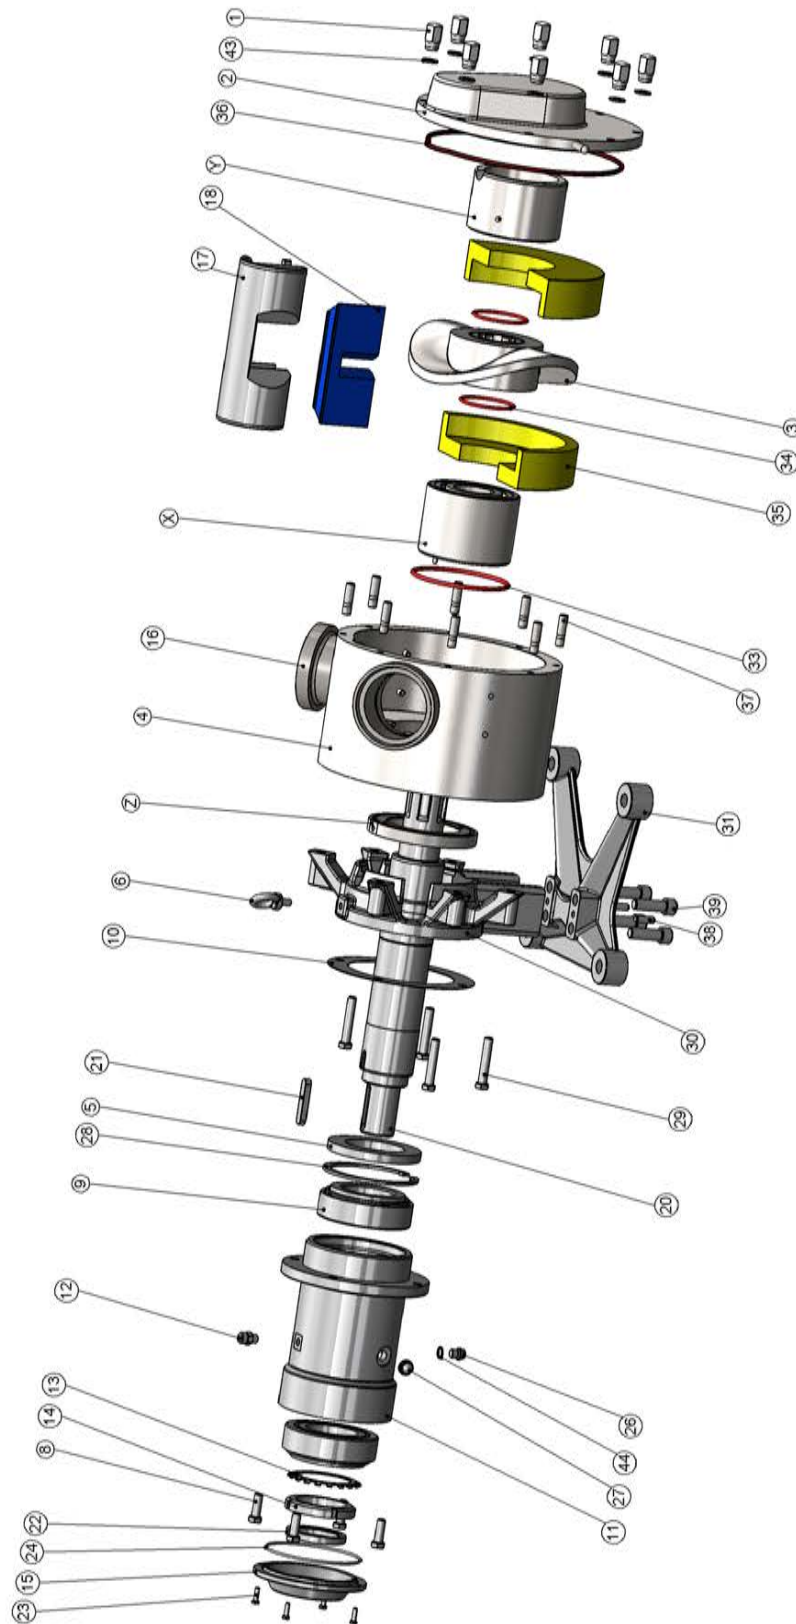

Parts list for SPS 500 with stainless steel power frame				
Number	Quantity	Part code	Item	
1	8	S50-1600-12	Cap Nut	
2	1	S50-0200-10	Front Cover	
3	1	S50-0100-10	Rotor	
4	1	S50-0300-10	Pump Housing	
5	1	S50-2320-80	Lip seal, inboard	
6	1	S50-3920-12	Lifting bolt M12	
8	4	S50-2220-12	Cap Screw	
9	2	S50-2420-25	Bearing, Tapered Roller	
10	1	S50-1421-30	Shim Ring	
11	1	S50-1420-12	Support	
12	1	S50-6000-50	Vent Valve	
13	1	S50-2700-25	Tab Washer	
14	1	S50-2800-25	Shaft Nut	
15	1	S50-1520-12	Cover, bearing housing	
16	2	Integral with pump housing. Type depends on customer choice	Nozzles	
17	1	S50-0700-10	Gate Guide	
18	1	S50-0400-49	Gate, MASOTRONIC-2070-WR	
	1	S50-0400-50	Gate, MASOTRONIC-2810-PA	
	1	S50-0400-62	Gate, MASOTRONIC-2080-PK	
19	2	S50-0250-12	Handle Pin	
20	1	S50-1020-16	Shaft	
21	1	S50-3200-25	Shaft Key	
22	1	S50-3100-80	Lip Seal, NBR	
23	4	S50-2920-12	Cap Screw	
24	1	S50-3020-80	O-ring, bearing housing cover	
26	1	S50-2020-12	Lock nut with hexagon socket	
27	1	S50-3820-51	Oil Level Glass	
28	1	S50-3720-25	Seal Plug (only for ATEX)	
29	1	S50-5020-12	Snap ring	
29	4	S50-1920-12	Cap Screw	
30	1	S50-1320-12	End plate, Power Frame	
31	1	S50-1321-12	Base plate, Power Frame	
33	1	S50-1750-80	O-Ring, Pump Housing, NBR	
	1	S50-1750-82	O-Ring, Pump Housing, EPDM	
	1	S50-1750-84	O-Ring, Pump Housing, FPM/FKM	
34	2	S50-1751-80	O-Ring, Rotor, NBR	
	2	S50-1751-82	O-Ring, Rotor, EPDM	
	2	S50-1751-84	O-Ring, Rotor, FPM / FKM	
35	2	S50-1200-50	Liners, MASOTRONIC-2800-PO	
	2	S50-1200-62	Liners, MASOTRONIC-2080-PK	
	2	S50-1200-63	Liners, MASOTRONIC-2681-HT	
36	1	S50-1701-80	O-Ring, Front Cover, NBR	
	1	S50-1701-82	O-Ring, Front Cover, EPDM	
	1	S50-1701-84	O-Ring, Front Cover, FPM/FKM	
37	8	S50-1800-12	Front Cover Studs	
38	2	S50-5010-12	Pin	
39	4	S50-5001-12	Socket head cap screw	
43	8	S50-1601-12	Washer	
44	1	S50-3721-33	Seal, Copper	
X			Seal System	
Y			Front Support	
Z			Sealing/Distance ring	

## 25.2 Seals


### Mechanical seal, single, SPS 100

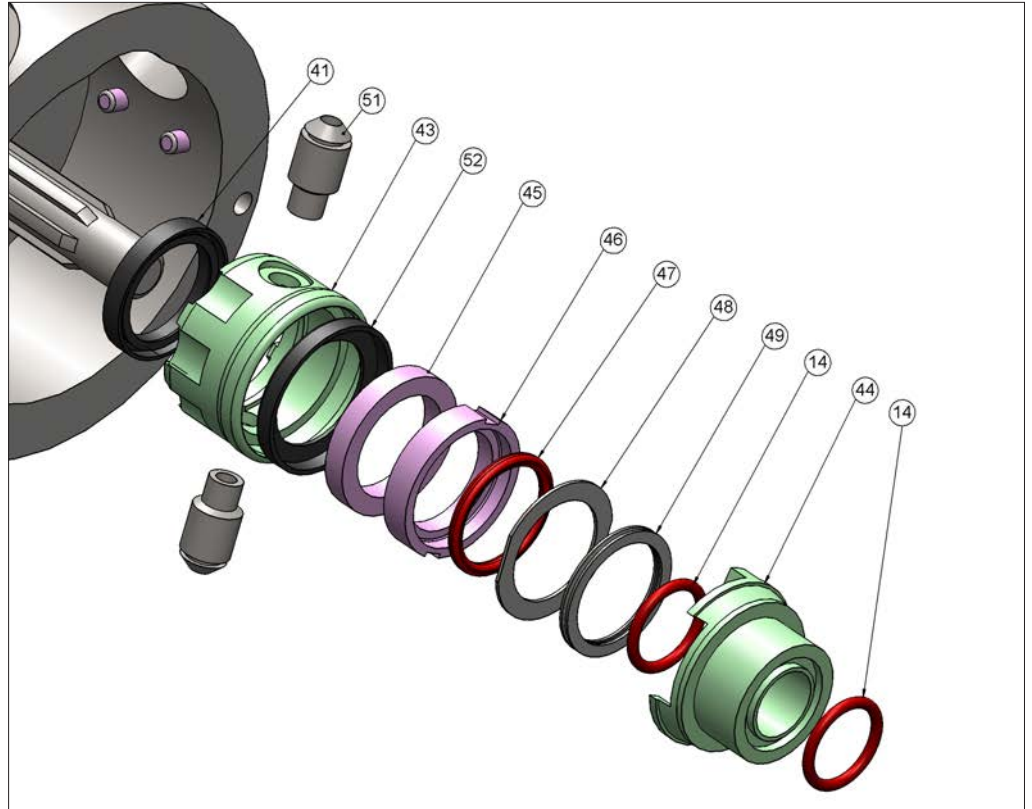

Number	Quantity	Part code	Item
14	2	S10-0011-80	O-Ring, NBR
	2	S10-0011-82	O-Ring, EPDM
	2	S10-0011-84	O-Ring, FPM / FKM
41	1	S10-0037-80	Lip Seal, NBR
43	1	S10-0042-10	Stationary Ring Holder
44	1	S10-0043-10	Dynamic Ring Holder
45	1	S10-0045-41	Stationary Seal Face, SiC
46	1	S10-0046-41	Rotating Seal Face, SiC
47	1	S10-0047-84	O-ring, FPM / FKM
	1	S10-0047-82	O-ring, EPDM
48	1	S10-0048-10	Thrust Washer
49	1	S10-0049-10	Wave Spring
50	1	S10-0050-10	Tappet (pin)
51	1	S10-0039-34	Flush Port
52	1	S10-0038-80	Cup, NBR
	1	S10-0038-82	Cup, EPDM
	1	S10-0038-84	Cup, FPM / FKM




## Mechanical seal, single, SPS 200

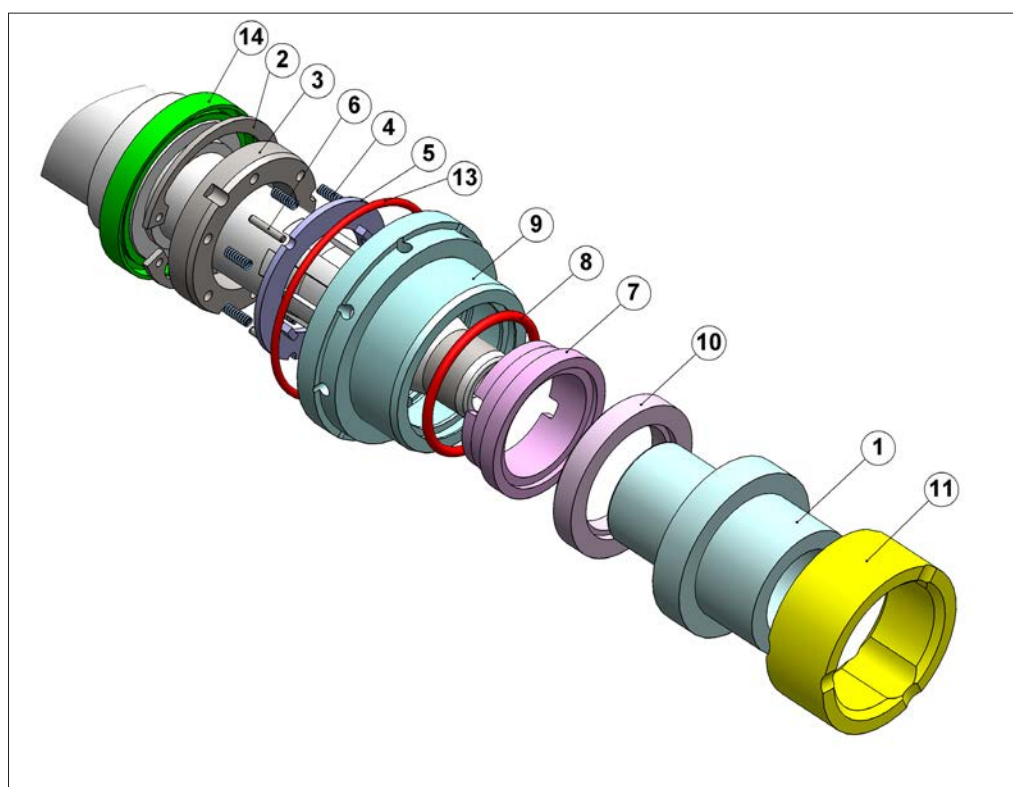


Number	Quantity	Part code	Item
1	1	S20-5210-10	Dynamic ring holder
2	1	S20-5223-12	Snap ring
3	1	S20-5220-10	Spring holder
4	6	020P572.1420A1	Spring
5	1	S20-5230-10	Spring support
6	3	S20-5222-10	Straight pin
7	1	S20-5245-41	Static surface, SiC
	1	S20-5245-66	Static surface, C
	1	S20-5246-80	O-ring, NBR
8	1	S20-5246-82	O-ring, EPDM
	1	S20-5246-84	O-ring, FPM / FKM
9	1	S20-5200-10	Static ring holder
	1	S20-5240-80	Cup with dynamic surface, SiC - NBR
10	1	S20-5240-82	Cup with dynamic surface, SiC - EPDM
	1	S20-5240-84	Cup with dynamic surface, SiC - FPM/FKM
	1	S20-5250-50	Backing ring, polyamide
11	1	S20-5250-55	Backing ring, PPS
	1	S20-5250-62	Backing ring, PEEK
	1	S20-8500-80	O-ring, NBR
13	1	S20-8500-82	O-ring, EPDM
	1	S20-8500-84	O-ring, FPM / FKM
14	1	S20-2300-80	Lip seal, NBR

## Mechanical seal, single, SPS 250

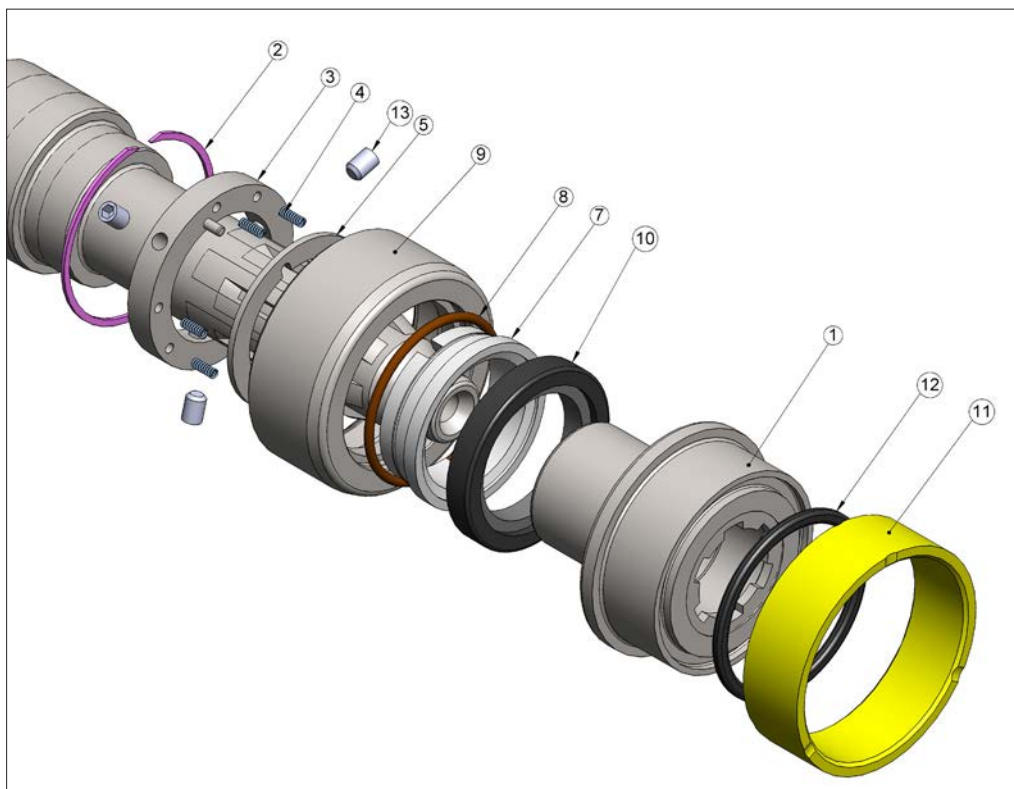

SPS 250			
Number	Quantity	Part code	Item
1	1	S21-5210-10	Dynamic ring holder
2	1	S21-5223-12	Snap ring
3	1	S21-5220-10	Spring holder
4	6	020P572.1420A1	Set screw
5	1	S21-5230-10	Spring support
7	1	S21-5245-41	Static surface, SiC
	1	S21-5245-66	Static surface, C
8	1	S21-5246-80	O-ring, NBR
	1	S21-5246-82	O-ring, EPDM
	1	S21-5246-84	O-ring, FPM / FKM
9	1	S21-5200-10	Static ring holder
10	1	S21-5240-80	Cup with dynamic surface, SiC - NBR
	1	S21-5240-82	Cup with dynamic surface, SiC - EPDM
	1	S21-5240-84	Cup with dynamic surface, SiC – FPM/FKM
11	1	S21-5250-50	Backing ring, polyamide
	1	S21-5250-55	Backing ring, PPS
	1	S21-5250-62	Backing ring, PEEK
12	1	S21-8505-80	O-ring, NBR
	1	S21-8505-82	O-ring, EPDM
	1	S21-8505-84	O-ring, FPM / FKM
13	3	S21-5222-10	Straight pin

## Mechanical seal, single, SPS 300, SPS 400 and SPS 500

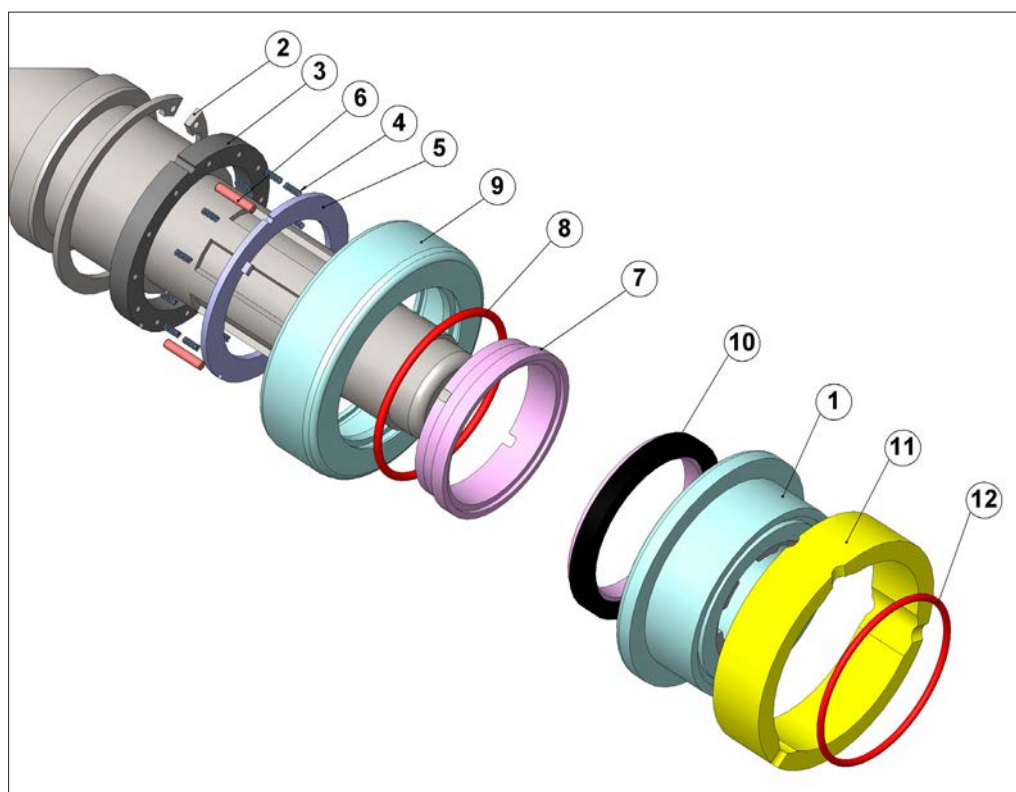


SPS 300			
Number	Quantity	Part code	Item
1	1	S25-5210-10	Dynamic ring holder
2	1	S25-5223-12	Snap ring
3	1	S25-5220-10	Spring holder
4	8	020P572.1420A1	Spring
5	1	S25-5230-10	Spring support
6	3	S25-5222-10	Straight pin
7	1	S25-5245-41	Static surface, SiC
	1	S25-5245-66	Static surface, C
8	1	S25-5246-80	O-ring, NBR
	1	S25-5246-82	O-ring, EPDM
	1	S25-5246-84	O-ring, FPM / FKM
9	1	S25-5200-10	Static ring holder
10	1	S25-5240-80	Cup with dynamic surface, SiC - NBR
	1	S25-5240-82	Cup with dynamic surface, SiC - EPDM
	1	S25-5240-84	Cup with dynamic surface, SiC – FPM/FKM
11	1	S25-5250-50	Backing ring, polyamide
	1	S25-5250-55	Backing ring, PPS
	1	S25-5250-62	Backing ring, PEEK
12	1	S25-8505-80	O-ring, NBR
	1	S25-8505-82	O-ring, EPDM
	1	S25-8505-84	O-ring, FPM / FKM

SPS 400			
Number	Quantity	Part code	Item
1	1	S40-5210-10	Dynamic ring holder
2	1	S40-5223-12	Snap ring
3	1	S40-5220-10	Spring holder
4	8	O20P572.1420A1	Spring
5	1	S40-5230-10	Spring support
6	3	S40-5222-10	Straight pin
7	1	S40-5245-41	Static surface, SiC
	1	S40-5245-66	Static surface, C
8	1	S40-5246-80	O-ring, NBR
	1	S40-5246-82	O-ring, EPDM
	1	S40-5246-84	O-ring, FPM / FKM
9	1	S40-5200-10	Static ring holder
10	1	S40-5240-80	Cup with dynamic surface, SiC - NBR
	1	S40-5240-82	Cup with dynamic surface, SiC - EPDM
	1	S40-5240-84	Cup with dynamic surface, SiC - FPM/FKM
11	1	S40-5250-50	Backing ring, polyamide
	1	S40-5250-55	Backing ring, PPS
	1	S40-5250-62	Backing ring, PEEK
12	1	S40-8505-80	O-ring, NBR
	1	S40-8505-82	O-ring, EPDM
	1	S40-8505-84	O-ring, FPM / FKM

SPS 500			
Number	Quantity	Part code	Item
1	1	S50-5210-10	Dynamic ring holder
2	1	S50-5223-12	Snap ring
3	1	S50-5220-10	Spring holder
4	14	020P572.1420A1	Spring
5	1	S50-5230-10	Spring support
6	3	S50-5222-10	Straight pin
7	1	S50-5245-41	Static surface, SiC
	1	S50-5245-66	Static surface, C
8	1	S50-5246-80	O-ring, NBR
	1	S50-5246-82	O-ring, EPDM
	1	S50-5246-84	O-ring, FPM / FKM
9	1	S50-5200-10	Static ring holder
10	1	S50-5240-80	Cup with dynamic surface, SiC - NBR
	1	S50-5240-82	Cup with dynamic surface, SiC - EPDM
	1	S50-5240-84	Cup with dynamic surface, SiC – FPM/FKM
11	1	S50-5250-50	Backing ring, polyamide
	1	S50-5250-55	Backing ring, PPS
	1	S50-5250-62	Backing ring, PEEK
12	1	S50-8505-80	O-ring, NBR
	1	S50-8505-82	O-ring, EPDM
	1	S50-8505-84	O-ring, FPM / FKM


### Lip seal assembly, triple lip seal system, SPS 100

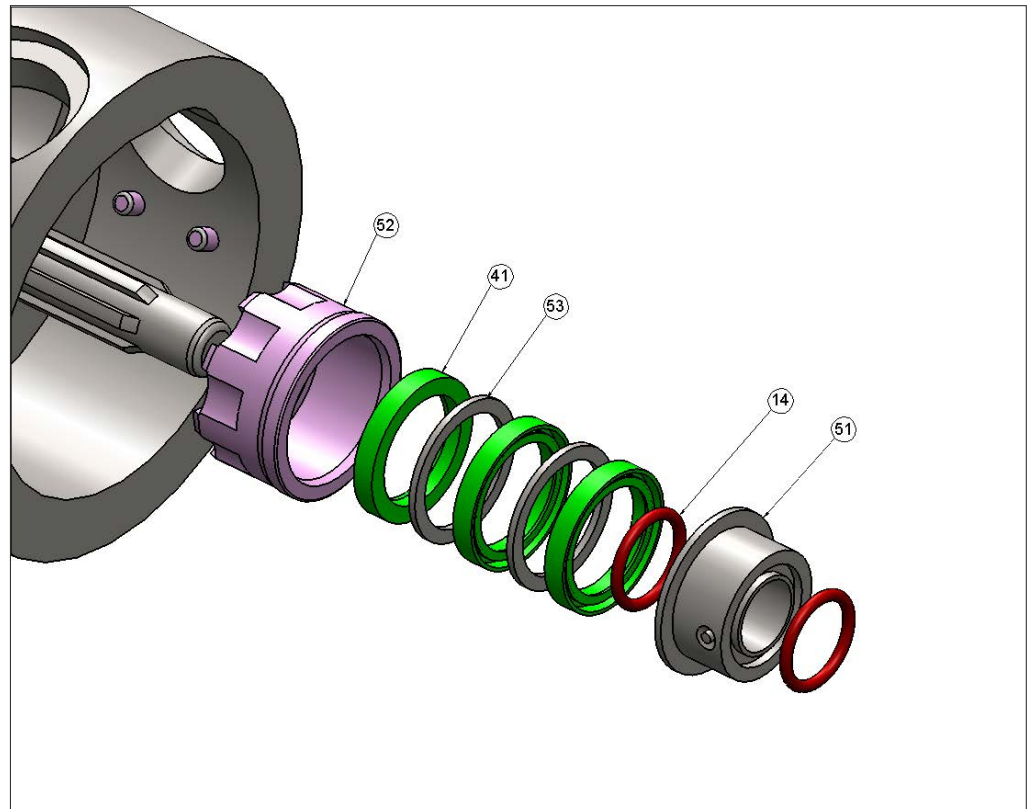

Number	Quantity	Part code	Item
14	2	S10-0011-80	O-Ring, NBR
	2	S10-0011-82	O-Ring, EPDM
	2	S10-0011-84	O-Ring, FPM / FKM
41	3	S10-0501-80	Lip Seal, NBR
51	1	S10-1194-10	Spacer, Lip Seal
52	1	S10-1116-10	Lip Seal Housing
53	2	S20-5310-10	Support Ring




### Lip seal assembly, triple lip seal system, SPS 200

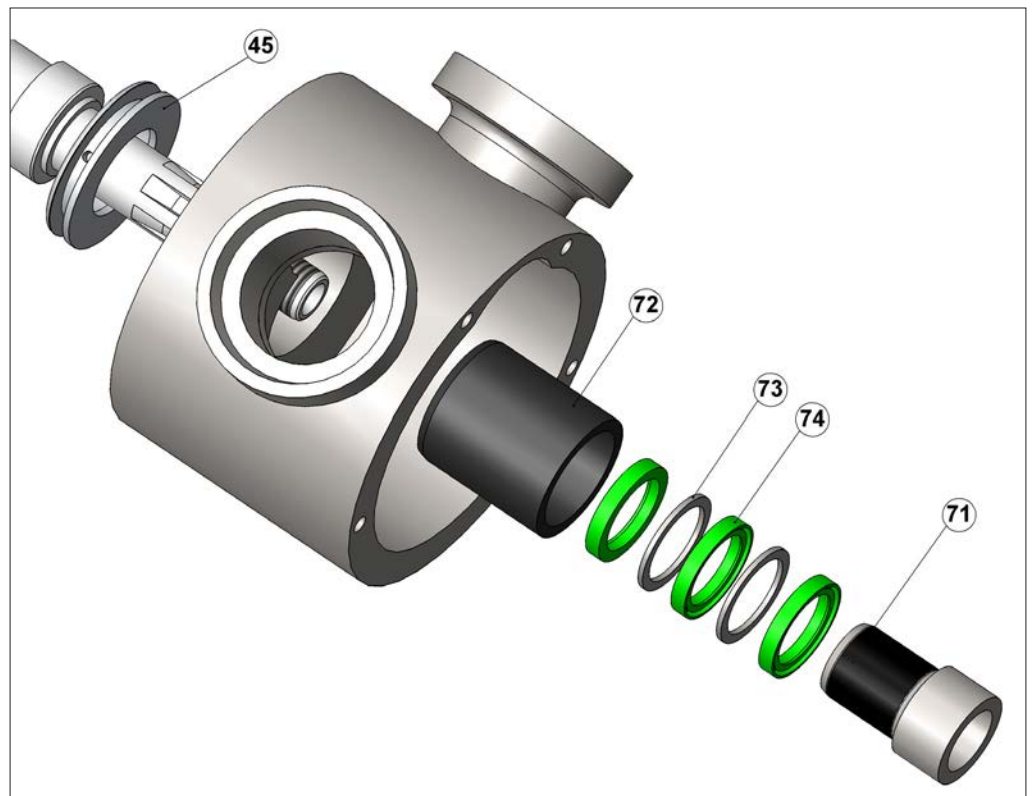


Number	Quantity	Part code	Item
45	1	S20-0513-10	Distance ring
71	1	S20-0610-10	Shaft sleeve
72	1	S20-0510-10	Seal housing, 1.4404
	1	S20-0510-62	Seal housing, Peek
	1	S20-0510-66	Seal housing, carbon
	1	S20-0510-50	Seal housing, polyamide
73	2	S20-5310-10	Support ring
74	3	S20-0501-80	Lip seal, NBR
	3	S20-0501-84	Lip seal, FPM / FKM

**Lip seal assembly, triple lip seal system, SPS 200 with stainless steel housing**

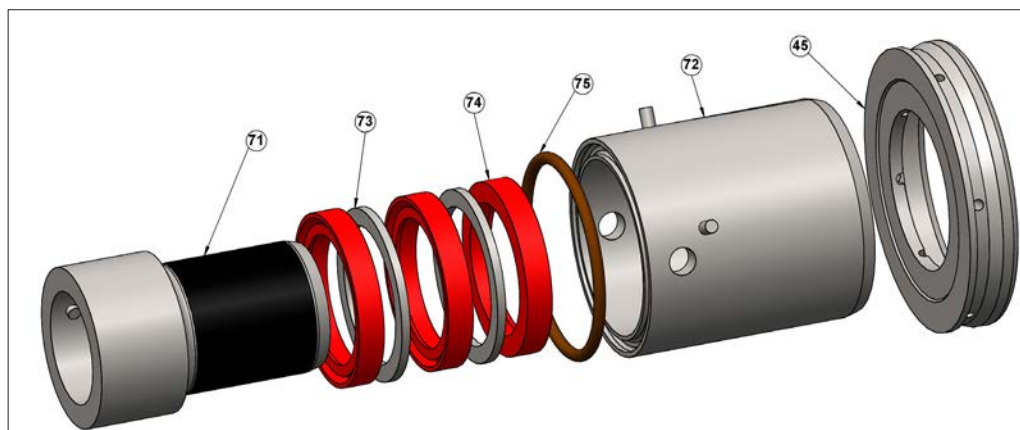

Number	Quantity	Part code	Item
45	1	S20-0513-10	Distance ring
71	1	S20-0610-10	Shaft sleeve
72	1	S20-0510-10	Seal housing, 1.4404
	1	S20-0510-62	Seal housing, Peek
	1	S20-0510-66	Seal housing, carbon
	1	S20-0510-50	Seal housing, polyamide
73	2	S20-0503-10	Support ring
74	3	S20-0501-80	Lip seal, NBR
	3	S20-0501-84	Lip seal, FPM / FKM
75	1	020P515.4400A1	O-Ring, dynamic face

**Lip seal assembly, triple lip seal system, SP250, SP300, SP400 and SP500**

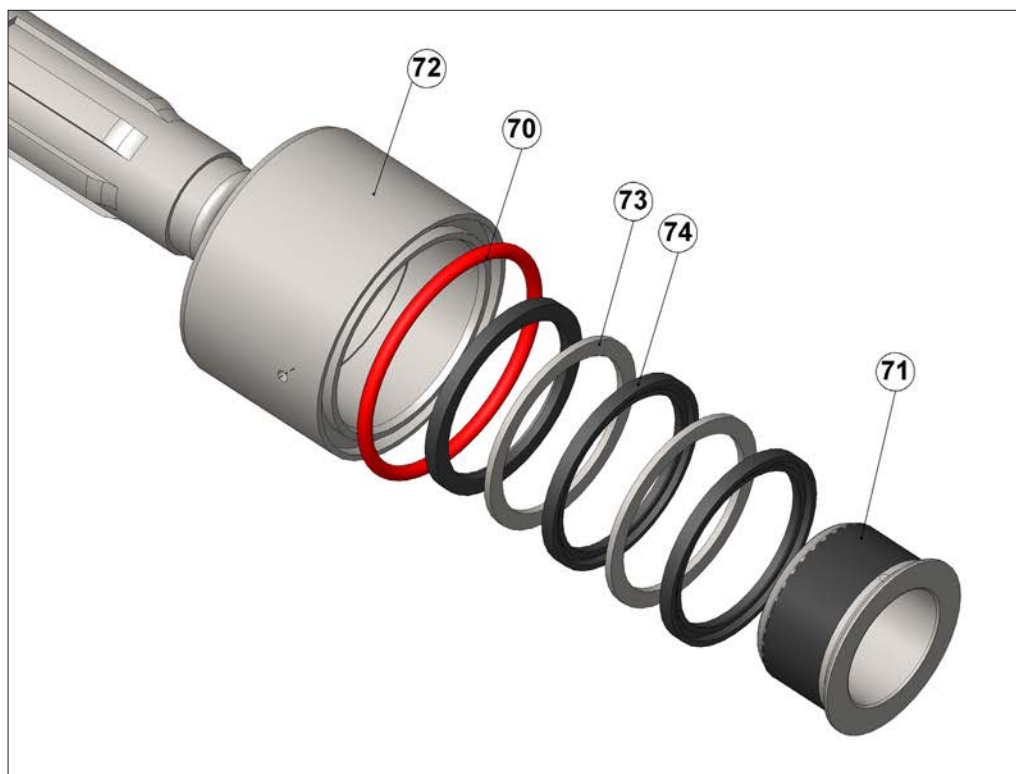

SPS 250			
Number	Quantity	Part code	Item
70	1	025P374.2800A1	Insert Polyamide
	1	025P374.2080A1	Insert Peek
	1	025P374.2090A1	Insert Peek Nature
71	1	S21-0610-10	Shaft sleeve
72	1	S21-0510-10	Seal housing
73	2	S21-5310-10	Support ring
74	3	S21-0501-80	Lip seal, NBR
	3	S21-0501-84	Lip seal, FPM / FKM


SPS 300			
Number	Quantity	Part code	Item
70	1	S25-4200-80	O-ring, NBR
	1	S25-4200-82	O-ring, EPDM
	1	S25-4200-84	O-ring, FPM / FKM
71	1	S25-0610-10	Shaft sleeve
72	1	S25-0510-10	Seal housing
73	2	S25-5310-10	Support ring
74	3	S25-0501-80	Lip seal, NBR
	3	S25-0501-84	Lip seal, FPM / FKM

SPS 400			
Number	Quantity	Part code	Item
70	1	S40-4200-80	O-ring, NBR
	1	S40-4200-82	O-ring, EPDM
	1	S40-4200-84	O-ring, FPM / FKM
71	1	S40-0610-10	Shaft sleeve
72	1	S40-0510-10	Seal housing
73	2	S40-5310-10	Support ring
74	3	S40-0501-80	Lip seal, NBR
	3	S40-0501-84	Lip seal, FPM / FKM

SPS 500			
Number	Quantity	Part code	Item
70	1	050P374.2800A1	Insert Polyamide
	1	050P374.2080A1	Insert Peek
	1	050P374.2090A1	Insert Peek Nature
71	1	S50-0610-10	Shaft sleeve
72	1	S50-0510-10	Seal housing
73	2	S50-5310-10	Support ring
74	3	S50-0501-80	Lip seal, NBR
	3	S50-0501-84	Lip seal, FPM / FKM


## 25.3 Front support versions

### SPS 200

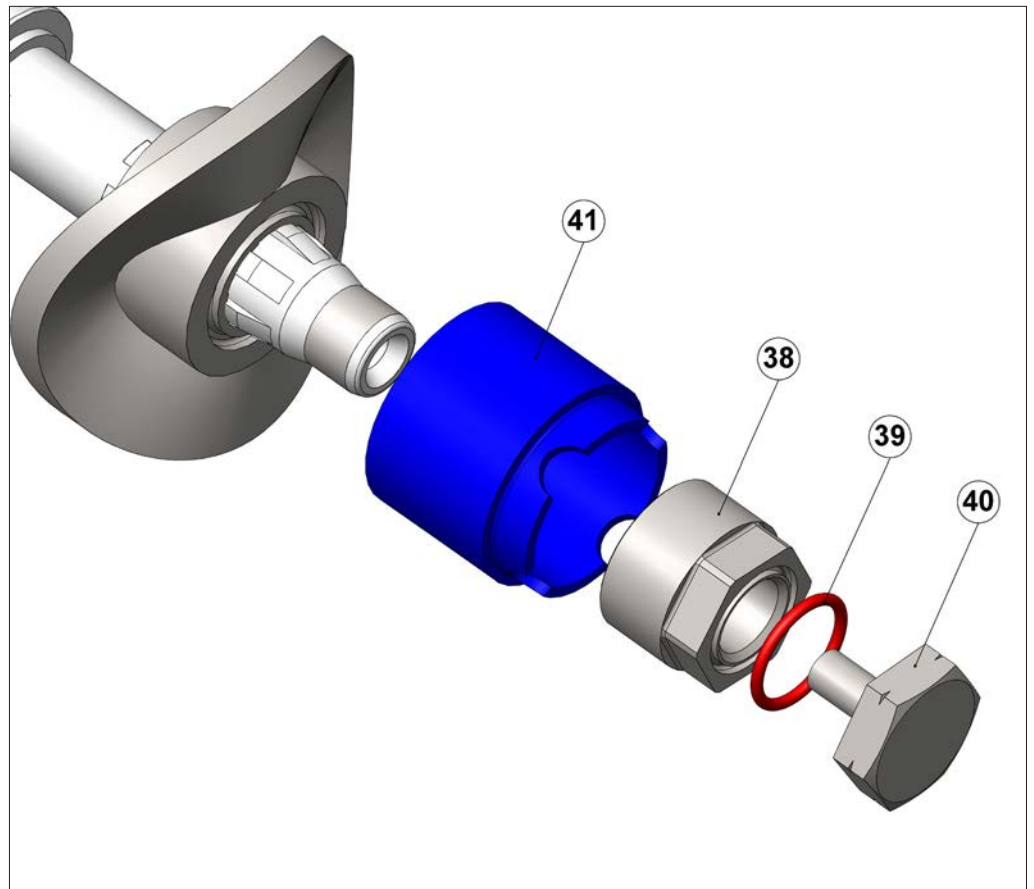

SPS 200 front support assembly			
Number	Quantity	Part code	Item
38	1	S20-0800-10	Shaft nut
39	1	S20-1752-80	O-ring, NBR
	1	S20-1752-82	O-ring, EPDM
	1	S20-1752-84	O-ring, FPM / FKM
40	1	S20-1100-10	Locking screw
41	1	S20-0900-10	Front support
	1	S20-0900-50	Front support polyamide
	1	S20-0900-55	Front support, PPS
	1	S20-0900-62	Front support, PEEK
	1	S20-0900-66	Front support, carbon

## SP250, SP300, SP400 and SP500, fixed front support

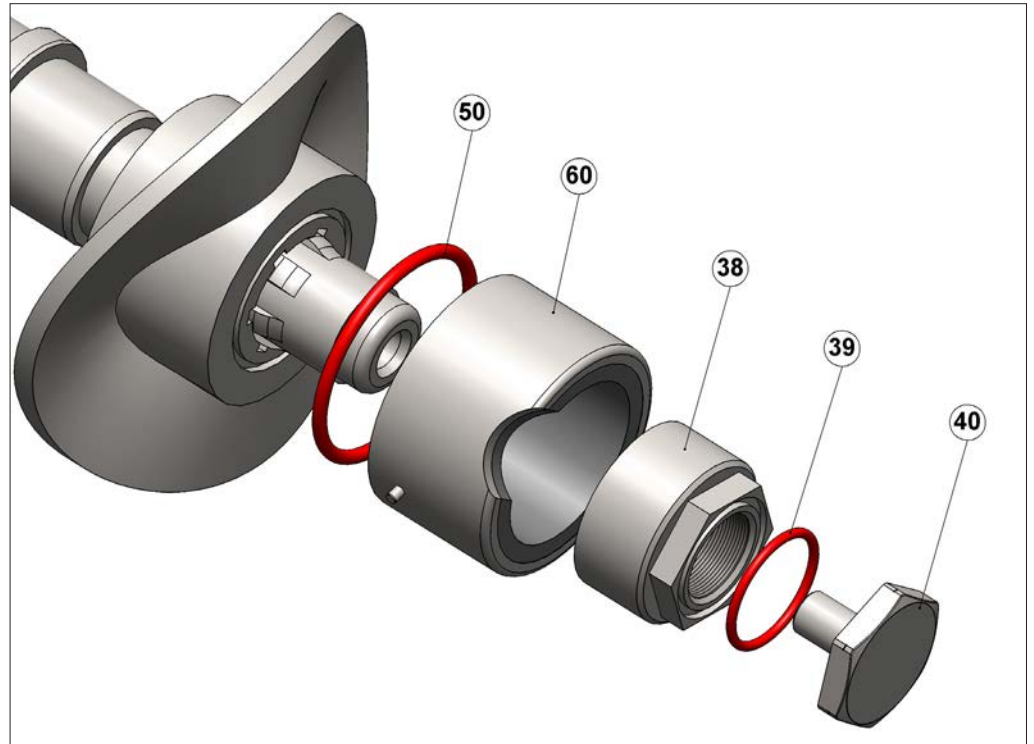

### SPS 250 front support assembly (Ca or 2800-PO)

Number	Quantity	Part code	Item
38	1	S21-0800-10	Shaft nut
39	1	S21-1752-80	O-ring, NBR
	1	S21-1752-82	O-ring, EPDM
	1	S21-1752-84	O-ring, FPM / FKM
40	1	S21-1100-10	Locking screw
50	1	025P374.2800A1	Insert Polyamide
	1	025P374.2080A1	Insert Peek
	1	025P374.2090A1	Insert Peek nature
60	1	S21-0900-10	Front support

### SPS 300 front support assembly (Ca or 2800-PO)


Number	Quantity	Part code	Item
38	1	S25-0800-10	Shaft nut
39	1	S25-1752-80	O-ring, NBR
	1	S25-1752-82	O-ring, EPDM
	1	S25-1752-84	O-ring, FPM / FKM
40	1	S25-1100-10	Locking screw
50	1	S25-4200-84	O-ring, FPM / FKM
60	1	S25-0900-10	Front support



SPS 400 front support assembly (Ca or 2800-PO)			
Number	Quantity	Part code	Item
38	1	S40-0800-10	Shaft nut
39	1	S40-1752-80	O-ring, NBR
	1	S40-1752-82	O-ring, EPDM
	1	S40-1752-84	O-ring, FPM / FKM
40	1	S40-1100-10	Locking screw
50	1	S40-4200-84	O-ring, FPM / FKM
60	1	S40-0900-10	Front support

SPS 500 front support assembly (Ca or 2800-PO)			
Number	Quantity	Part code	Item
38	1	S50-0800-10	Shaft nut
39	1	S50-1752-80	O-ring, NBR
	1	S50-1752-82	O-ring, EPDM
	1	S50-1752-84	O-ring, FPM / FKM
40	1	S50-1100-10	Locking screw
50	1	050P374.2800A1	Insert Polyamide
	1	050P374.2080A1	Insert Peek
	1	050P374.2090A1	Insert Peek nature
60	1	S50-0900-10	Front support

**SP250, SP300, SP400 and SP500, dynamic front support**

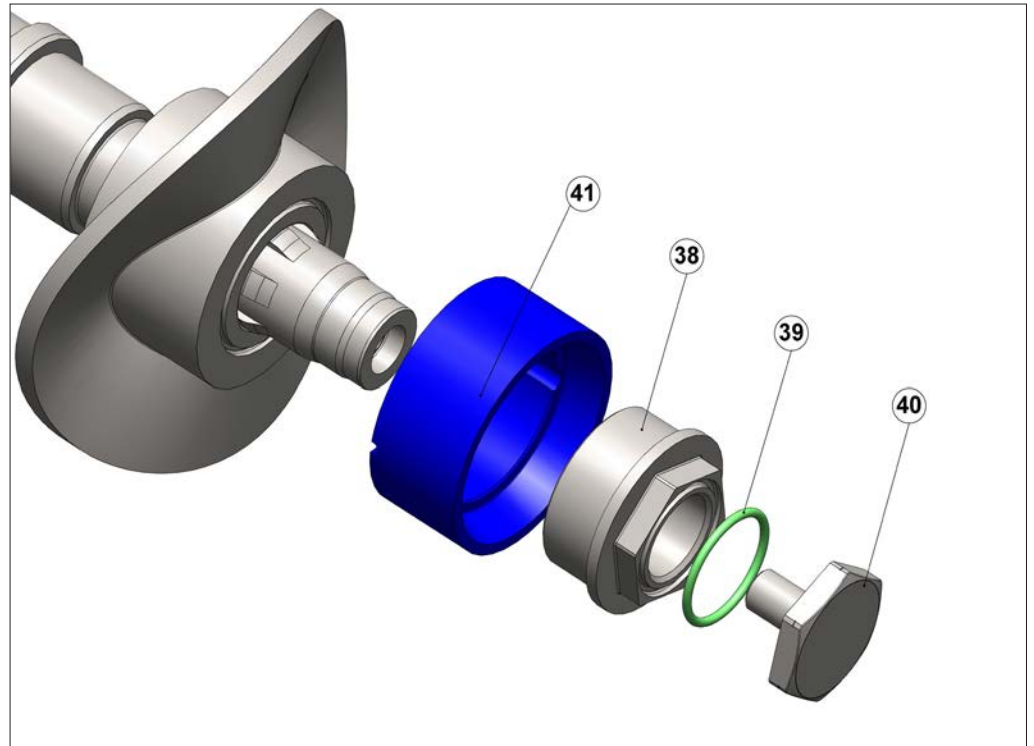


SPS 250 front support assembly (Peek or 2800-PO)			
Number	Quantity	Part code	Item
38	1	S21-0820-10	Shaft nut
39	1	S21-1752-80	O-ring, NBR
	1	S21-1752-82	O-ring, EPDM
	1	S21-1752-84	O-ring, FPM / FKM
40	1	S21-1100-10	Locking screw
41	1	S21-0900-55	Front support, PPS
	1	S21-0960-62	Front support, PEEK

SPS 300 front support assembly (Peek or 2800-PO)			
Number	Quantity	Part code	Item
38	1	S25-0820-10	Shaft nut
39	1	S25-1752-80	O-ring, NBR
	1	S25-1752-82	O-ring, EPDM
	1	S25-1752-84	O-ring, FPM / FKM
40	1	S25-1100-10	Locking screw
41	1	S25-0900-55	Front support, PPS
	1	S25-0960-62	Front support, PEEK


SPS 400 front support assembly (Peek or 2800-PO)			
Number	Quantity	Part code	Item
38	1	S40-0820-10	Shaft nut
39	1	S40-1752-80	O-ring, NBR
	1	S40-1752-82	O-ring, EPDM
	1	S40-1752-84	O-ring, FPM / FKM
40	1	S40-1100-10	Locking screw
41	1	S40-0900-55	Front support, PPS
	1	S40-0960-62	Front support, PEEK

SPS 500 front support assembly (Peek or 2800-PO)			
Number	Quantity	Part code	Item
38	1	S50-0820-10	Shaft nut
39	1	S50-1752-80	O-ring, NBR
	1	S50-1752-82	O-ring, EPDM
	1	S50-1752-84	O-ring, FPM / FKM
40	1	S50-1100-10	Locking screw
41	1	S50-0900-55	Front support, PPS
	1	S50-0960-62	Front support, PEEK

## 25.4 The flushing ring for tubing

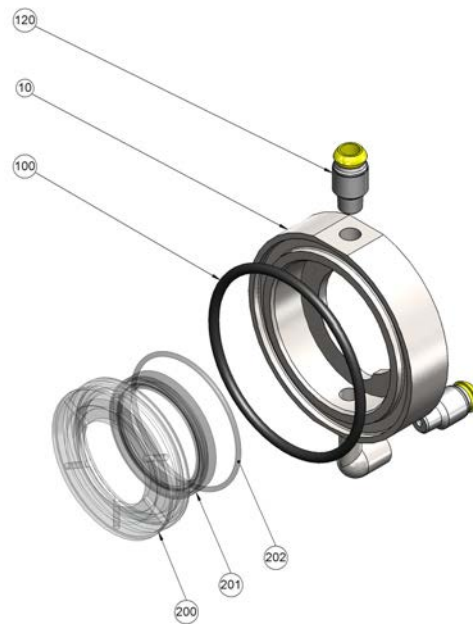


SPS 200 (S20-1326-10)		
Number/ Letter	Part code	Item
10	S20-1328-10	Distance ring
100	S40-1755-80	O-ring
120	S20-0504-34	Flushing port
200	S20-0513-30	Distance ring
201	S20-2300-80	Lip seal
202	S20-8500-80	O-Ring

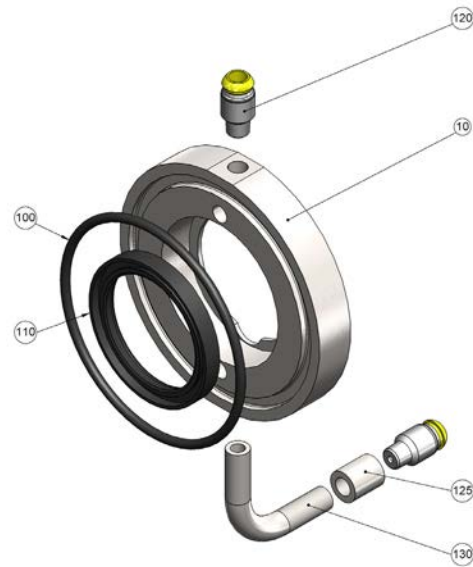

SPS 250, SPS 300, SPS 400, SPS 500		
Number/ Letter	Part code	Item
10	S__-1328-10	Distance ring
100	S__-1755-80	O-ring
110	S__-2321-80	Lip seal
120	80-0010-34	Flushing port
125	80-6005-10	Bushing
130	80-6004-10	Elbow 90 degrees

## 25.5 The static flushing device

With cast iron power frame

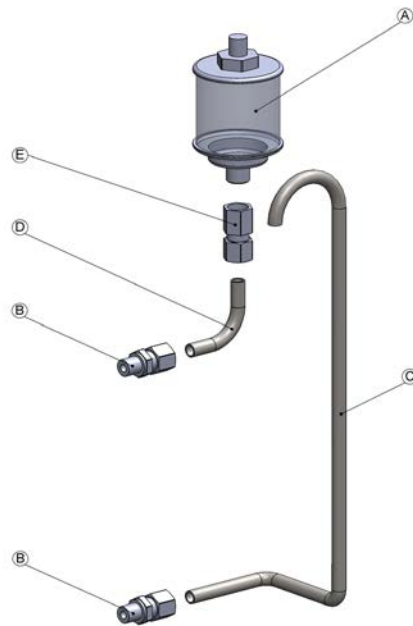


SPS 200		
Letter	Part code	Item
A	80-0014-95	Sight glass
B	80-0011-10	Connection piece
C	22-0178-10	Flushing pipe, long

SPS 250, SPS 300, SPS 400, SPS 500


Letter	Part code	Item
A	80-0015-95	Sight glass
B	80-0012-10	Connection piece
C	___-0178-10	Flushing pipe, long
D	___-0179-10	Flushing pipe, short
E	80-0013-10	Connection piece

With stainless steel power frame

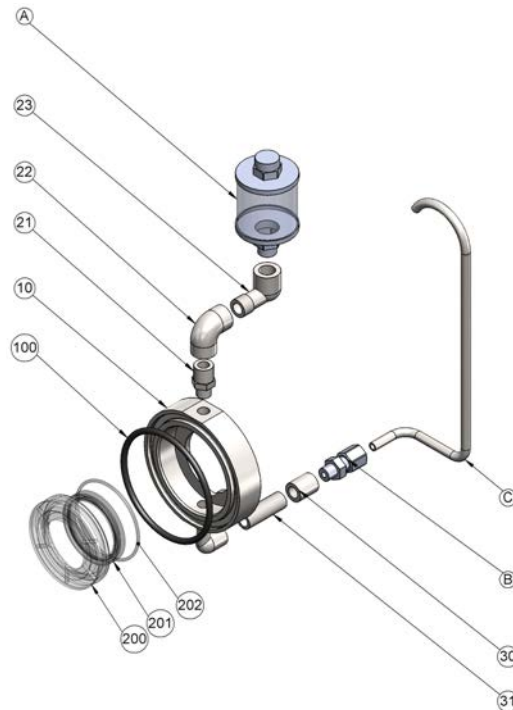

SPS 200 (S20-1327-10)		
Number/ Letter	Part code	Item
A	80-0014-95	Glass for static flush-system
B	80-0012-10	Adapter/pipe fitting
C	S20-0173-10	Flush pipe
10	S20-1328-10	Distance ring
21	S20-9001-10	Hexagon reducing nipple
22	S20-9002-10	Elbow 90°
23	S20-9003-10	Elbow
30	80-6005-10	Bushing
31	80-6009-10	Double nipple
100	S20-1755-80	O-ring
200	S20-0513-30	Distance ring
201	S20-2300-80	Lip seal
202	S20-8500-80	O-ring

### With stainless steel power frame

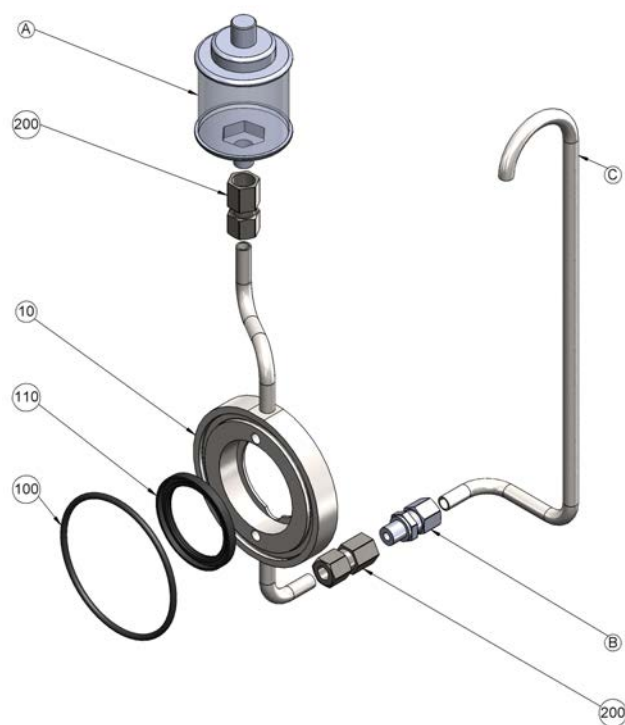

### SPS 250, SPS 300, SPS 400, SPS 500

Number/ Letter	Part code	Item
A	80-0015-95	Glass for static flush-system
B	80-0012-10	Adapter/pipe fitting
C	S__-0173-10	nipple pipe, long
10	S__-1328-10	Distance ring
100	S__-1755-80	O-ring sealing
110	S__-2321-80	Lip seal
200	80-0013-10	Adapter/pipe fitting



## 26 Decontamination certificate

In compliance with the *UK Health and Safety at Work Act* and the *Control of Substances Hazardous to Health Regulations*, you are required to declare the substances which have been in contact with product(s) you return to Watson-Marlow or its subsidiaries or distributors. Failure to do so will cause delays. Please ensure that you fax us this form and receive an RGA (Returned Goods Authorisation) before you despatch the product(s). A copy of this form must be attached to the outside of the packaging containing the product(s). Please complete a separate decontamination certificate for each product. You are responsible for cleaning and decontaminating the product(s) before return. Products which have not been cleaned and decontaminated will incur a charge.

<b>Your name</b>	<input type="text"/>	<b>Company</b>	<input type="text"/>
<b>Address</b>	<input type="text"/>		
<b>Postcode/zip</b>	<input type="text"/>	<b>Country</b>	<input type="text"/>
<b>Telephone</b>	<input type="text"/>	<b>Fax</b>	<input type="text"/>
<b>Product type</b>	<input type="text"/>	<b>Serial number</b>	<input type="text"/>
<b>To speed the repair, please describe all known faults</b>	<input type="text"/>		
<b>The product has ...</b>	<input type="checkbox"/> Been used <input type="checkbox"/> Not been used		
	<i>If the product has been used, please complete all the following sections.          If the product has not been used, please just sign this form.</i>		
<b>Names of chemicals handled with product(s)</b>	<input type="text"/>		
<b>Precautions to be taken in handling these chemicals</b>	<input type="text"/>		
<b>Action to be taken in the event of human contact</b>	<input type="text"/>		
	<i>I understand that the personal data collected will be kept confidentially          in accordance with the UK Data Protection Act 1998.</i>		
<b>Signature</b>	<input type="text"/>	<b>RGA number</b>	<input type="text"/>
		<b>Your position</b>	<input type="text"/>
		<b>Date</b>	<input type="text"/>
<i>Please print out, sign and fax to MasoSine Process Pumps at +49 (0) 07062 64593</i>			

## 27 Trademarks

**MasoSine** is a trademark of Watson-Marlow Limited.

## 28 Publication history

m-maso-sps-gb: MasoSine SPS

First published 09 12, revised 03 13, revised 01 15, revised 04 16.